



# Fluid Contamination Solutions

## Catalog 5.6



**Donaldson Confidential. Do Not Distribute.**

© 2026 Donaldson Company, Inc. All rights reserved.

# Table of Contents

Fluid  
Contamination  
Reference  
Materials



- 4** About Us
- 6** Understanding ISO Codes
- 8** ISO Code Limits
- 10** Bearing & Component Life Extension
- 12** Fluid Life Extension
- 14** Fluid Analysis Reference Guide
- 16** Donaldson Hy-Pro Solutions App
- 18** iCue Connected Technology
- 20** Viscosity Reference Chart
- 24** Filter Assembly Sizing

Filter  
Elements  
& Media



- 28** DFE Dynamic Filter Efficiency
- 34** Cellulose to Glass Upgrades
- 36** Lube Design Filter Elements
- 37** Dynafuzz Stainless Fiber Media
- 38** NSD Non-Spark Discharge Filter Element
- 39** Water Removal Filter Elements
- 40** Turbo-TOC Filter Element Upgrades

Fluid  
Conditioning  
Equipment



- 42** Off-line Filtration
- 44** COF Compact Offline Filter
- 48** CFU Compact Filter Unit
- 52** FPL Filter Panel
- 56** FC Filter Cart
- 60** FSL High Viscosity Filter Systems
- 64** FSLD Duplex High Viscosity Filter Skids
- 68** FSW Wall Mounted Filtration Systems
- 72** FCL High Viscosity Filter Carts
- 76** HS Heater Skids



- 80** Diesel Contamination
- 82** COD Diesel Conditioning Filter Systems
- 86** FSLCOD Diesel Conditioning Filter Systems
- 90** FCLCOD Diesel Conditioning Filter Cart
- 94** CSD Diesel Coalesce Filter Housing



- 98** Varnish Contamination
- 102** FSTO Turbine Oil Varnish Removal Systems
- 106** FSA Phosphate Ester Varnish Removal Systems
- 110** FSJL Jet Lube Varnish Removal Systems
- 114** ICB Ion-Exchange Filter Elements



- 118** Water Contamination
- 120** VUD Vac-U-Dry Vacuum Dehydrators
- 128** V1 Compact VUD Vacuum Dehydrator
- 132** COT Turbine Oil Conditioning Skids
- 138** FCLCOT Turbine Oil Conditioning Filter Cart
- 142** RHD Reservoir Headspace Dryer



- 144** Fluid Handling + Storage
- 144** LCS Liquid Conditioning Station
- 150** Custom Equipment

# Table of Contents

## Filter Assemblies



- 152** Filter Assembly Pressure Chart
- 154** TF4 In-Tank Filter Assembly
- 158** TFR3 In-Tank Filter Assemblies
- 164** TFR200 In-Tank Return Line Filter Assemblies
- 170** TFRB In-Tank Return Line Filter Assemblies
- 176** TFRC In-Tank Return Line Filter Assemblies

### Low Pressure Assemblies



- 182** LF(M) High Viscosity Filter Assemblies
- 188** LFW Wall Mounted Filter Assemblies
- 192** S75-76 Low Pressure Spin-On Filter Assemblies

### Medium Pressure Assemblies



- 196** F8 Medium Pressure Filter High Flow Filter Assembly
- 200** MF3 Medium Pressure Filter Assemblies
- 204** MF Medium Pressure Filter Assemblies

### High Pressure Assemblies



- 210** PF2 High Pressure In-line Filter Assembly
- 214** PF4 High Pressure Base Mounted Filter Assemblies
- 220** PFH High Pressure In-Line Filter Assemblies
- 226** PFH62 High Pressure In-Line Filter Assemblies
- 232** PFH92 High Pressure In-Line Filter Assemblies
- 238** PFH840 High Pressure In-line Filter Assemblies
- 244** PFHB High Pressure Full Flow Bi-Directional Filter Assemblies

### Duplex Filter Assemblies



- 248** DLF(M) High Flow Duplex Filter Assembly
- 254** DFN Low Pressure Duplex Filter Assembly
- 258** DFH High Pressure Duplex Filter Assembly

## Reservoir Accessories



- 262** BT T.R.A.P. Technology Breathers
- 266** BF High Flow Breathers
- 268** Spin-On Breathers

## Test Kits & Equipment



- 270** PTK1 Oil Analysis Patch Test Kit
- 272** VTK On-Site Varnish Test Kits
- 274** PM-1 On-Line ISO Code Particle Monitor
- 276** PFM75 Portable Fluid Monitor
- 280** Sample Port Fittings

## Appendix

### Questionnaires & Data Sheets

- 286** VUD Questionnaire
- 287** Filter Assembly Application & Sizing Data Sheet
- 288** Non-Standard Filter Element Data Sheet

### Warranty & RGA

- 290** Terms and Conditions
- 297** Equipment Warranty
- 300** Returned Goods Policy
- 301** ATEX Recommendation for the use of fluid filters
- 302** FLA (Full Load Amp) for Powered Equipment
- 303** Indicator Wiring Diagrams
- 304** Mounting Specifications
- 305** Quality Statement & ISO Certification

## Part Number Quick Reference

BF Breathers	<b>267</b>
BT Breathers	<b>264</b>
CFU	<b>51</b>
COD	<b>85</b>
COF	<b>47</b>
COT	<b>137</b>
CSD	<b>97</b>
DFH	<b>261</b>
DFN	<b>257</b>
DLF	<b>253</b>
F8	<b>199</b>
FC	<b>59</b>
FCL	<b>75</b>
FCLCOD	<b>93</b>
FCLCOT	<b>141</b>
FPL	<b>55</b>
FSA	<b>109</b>
FSJL	<b>113</b>
FSL	<b>63</b>
FSLCOD	<b>89</b>
FSLD	<b>67</b>
FSTO	<b>105</b>
FSW	<b>71</b>
HS	<b>79</b>
LCS	<b>148</b>
LF	<b>187</b>
LFW	<b>191</b>
MF	<b>209</b>
MF3	<b>203</b>
PF2	<b>213</b>
PF4	<b>219</b>
PFH	<b>225</b>
PFH62	<b>231</b>
PFH92	<b>237</b>
PFH840	<b>243</b>
PFHB	<b>247</b>
RHD	<b>143</b>
S75-S76	<b>195</b>
Spin-On Breather	<b>269</b>
TF4	<b>157</b>
TFR3	<b>163</b>
TFR200	<b>169</b>
TFRB	<b>175</b>
TFRC	<b>181</b>
V1	<b>131</b>
VUD	<b>127</b>



# About Donaldson Hy-Pro

---

Donaldson Hy-Pro masters and advances hydraulic, lubrication, and fuel contamination control for a cleaner world. We strive to make our customers as efficient as possible and help achieve their sustainability objectives and do this by improving the reliability of hydraulic and lube oil assets with industry-leading filter elements and contamination solutions equipment. Donaldson Hy-Pro mitigates and controls dirt, water, and acid concentrations in the oil so components last longer and don't shed particles that result in oil leaks, component loss of usefulness, and depletion of oil additives.

Donaldson Hy-Pro drives innovation to solve the industry's toughest contamination challenges with world-class filtration and strategies to combat fluid contamination. Our state-of-the-art manufacturing facilities are home to vertically integrated and flexible build processes that allow us to leverage Donaldson Hy-Pro and Donaldson manufacturing, streamline manufacturing, and create tailored solutions to our customers' challenges. Donaldson Hy-Pro thrives on continually improving and identifying new ways to enhance our products and the customer experience.

Donaldson Hy-Pro develops cutting-edge filter medias supported by best-in-class contamination control training and education led by technical experts and world-class customer service. Donaldson Hy-Pro is the most complete and effective fluid contamination solutions provider utilizing oil sampling, online conditioning monitoring, sample results analysis and interpretation, and the world's most comprehensive critical filter element interchange.



# What we're about

## Advanced Media Technology



Innovative media development and DFE rated filter elements are the core of Donaldson Hy-Pro's products, delivering lower operating ISO Codes for reliable plant operation. Optimized vacuum dehydration, coalesce and nitrogen membrane water removal technologies eliminate critical system water related failures. Ion Charge Bonding (ICB) treatment of specified lube and hydraulic oils addresses fluid contamination on a molecular level to prevent servo valve failures and extend fluid life. Dedicated smart off-line filtration systems condition extremely high viscosity oils that were previously considered not filterable. And that's just scratching the surface of what Donaldson Hy-Pro can do.

## The Highest Quality



Engineered, manufactured and tested in our state of the art facilities across the US, our contamination solutions are built to be rugged, dependable, and easy to use. From the highest quality materials and components, we deliver the best filtration equipment anywhere in the world. The same quality goes into Donaldson Hy-Pro filter elements, eliminating any contamination challenge imaginable to provide our customers with the incredible results and peace of mind they deserve.

## Unmatched Expertise



Work with Donaldson Hy-Pro and you're working shoulder-to-shoulder with the industry experts to implement contamination control and prevention in all things industrial fluid. But it doesn't stop there. From customized strategies and long term solutions to on-site service, support and training, our expert Field Technical Reps are involved from before implementation begins to long after the life of the filter element to ensure our customers are provided the best solutions for their specific contamination problems.

## Flexible Design & Manufacturing



Whether you're selecting the perfect options from our standard product lines or need a completely custom, one of a kind solution, we listen to your needs and collaborate with you to deliver a specific contamination solution to fit your exact application.

## Rapid Response



The flexibility in our manufacturing processes along with our extensive inventory of ready-to-ship filter elements allow us to respond to any situation with incredible speed. For standard delivery, you'll receive your elements in days, not weeks. And in some cases like the event of any emergency or upset situation, we're even able to deliver your exact filter element in hours to maximize your uptime and keep your plant running efficiently.

## Eliminate Waste & Protect the Environment




Through contamination control and molecular treatment, Donaldson Hy-Pro extends the useful life of critical hydraulic and lube oils to improve reliability and bottom line profitability. Preventing premature fluid replacement reduces environmental impact, which is a responsibility that falls on everyone. With our products and efforts in fluid management, we continue to bring conservation of natural resources and reduction of industrial waste to the forefront.

# Understanding ISO Codes

The ISO Cleanliness Code (per ISO4406-2021) is used to quantify particulate contamination levels per milliliter of fluid at 3 sizes -  $4\mu_{[C]}$ ,  $6\mu_{[C]}$ , and  $14\mu_{[C]}$ . It is expressed in 3 numbers (example 19/17/14) where each number represents a contaminant level code for the correlating particle size. The code includes all particles of the specified size and larger.

It is important to note that each time a code increases, the quantity range of particles is doubling. Inversely, as a code decreases by one the contaminant level is cut in half.

## ISO Code Example:

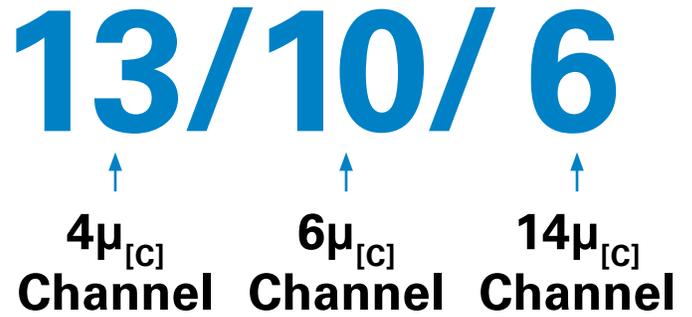

# ISO 4406:2021 Code Chart

ISO Code	Particles per Milliliter (PPM)		Sample Values Before Filtration			
	Lower Limit	Upper Limit	Particle Size	PPM	ISO 4406 Code Range	ISO Code
<b>24</b>	<b>80,000</b>	<b>160,000</b>	$4\mu_{[C]}$	151773	<b>80,000-160,000</b>	<b>24</b>
23	40,000	80,000	$4.6\mu_{[C]}$	87210		
<b>22</b>	<b>20,000</b>	<b>40,000</b>	$6\mu_{[C]}$	<b>38363</b>	<b>20,000-40,000</b>	<b>22</b>
21	10,000	20,000	$10\mu_{[C]}$	8229		
20	5,000	10,000	$14\mu_{[C]}$	<b>3339</b>	<b>2,500-5,000</b>	<b>19</b>
<b>19</b>	<b>2,500</b>	<b>5,000</b>	$21\mu_{[C]}$	1048		
18	1,300	2,500	$38\mu_{[C]}$	112		
17	640	1,300	$68\mu_{[C]}$	2		
16	320	640				
15	160	320				
14	80	160				
<b>13</b>	<b>40</b>	<b>80</b>	$4\mu_{[C]}$	<b>69</b>	<b>40-80</b>	<b>13</b>
12	20	40	$4.6\mu_{[C]}$	35		
11	10	20	$6\mu_{[C]}$	<b>7</b>	<b>5-10</b>	<b>10</b>
<b>10</b>	<b>5</b>	<b>10</b>	$10\mu_{[C]}$	5		
9	2.5	5	$14\mu_{[C]}$	<b>0.4</b>	<b>0.32-0.64</b>	<b>6</b>
8	1.3	2.5	$21\mu_{[C]}$	0.1		
7	0.64	1.3	$38\mu_{[C]}$	0.0		
<b>6</b>	<b>0.32</b>	<b>0.64</b>	$68\mu_{[C]}$	0.0		

# Fluid Cleanliness Code Comparisons

ISO/DIS 4406 BS 5540/4 Codes	NAS 1638	SAE 749	Defence Standard 05/42	
			Table A	Table B
25/23/17			100,000	
24/22/15			21,000	
23/21/18	12			
23/21/14			15,000	
22/20/17	11			
22/20/13			6,300	
21/19/16	10			
21/19/13			4,400	6,300F
20/18/15	9	6		
20/18/13				4400F
20/18/12			2,000	
19/17/14	8	5		
19/17/11			1,300	2,000F
18/16/13	7			
18/16/11				1,300F
18/16/10			800	
17/15/12	6	3		
17/15/10				800F
17/15/09			400	
16/14/11	5	2		
16/14/09				400F
15/13/10	4	1		
14/12/09	3	0		
13/11/08	2			

# ISO Code Limits

Hydraulic component and bearing manufacturers set ISO fluid cleanliness code limits that are the maximum tolerance for fluid contamination under which predictable performance and life can be maintained. These limits often become fluid cleanliness targets at the mill or plant level. Using the upper limit as a target means that you are operating on the absolute edge with no room for error. But there is a better way.

Our mission is to make our customers as efficient as possible. To do this we recommend and help implement operating ISO Codes that are well below OEM upper limits. Our focus is not to hit a valve manufacturer's ISO Code limit but to help our customer reduce servo valve replacements from 220 in one year to 6 in the next by implementing lower operating ISO Codes and drastically reducing component wear/failure. And since that customer could prove that their oil was cleaner than required by spec, those 6 servos in year 2 were replaced under warranty by the manufacturer. Lower operating ISO Codes can extend component life by triple, quadruple and beyond, resulting in huge reliability, profitability and efficiency gains.

## How clean is my fluid?

Identifying proper sampling ports and locations, taking accurate samples and correctly interpreting results are critical to success. That's why our training and support are based on knowing and understanding the importance of fluid cleanliness and sampling. Donaldson Hy-Pro is on the front line with on-line particle counters, expertise and strategies to achieve lower operating ISO Codes.


## Setting operating ISO Codes.

The table on the following page represents Donaldson Hy-Pro's recommendations for operating ISO Code by component and pressure. These are lower than typical industry standard target ISO Codes and are based on our experience of extending component life and reliability. Other considerations in setting a lower operating ISO Codes include:

- Component criticality (turbine hydraulic controls)
- Safety (amusement park hydraulics)
- Excessive shock or vibration (mining excavator)
- High frequency duty cycle (high speed stamping press)

## Total System Cleanliness

Upgrading to DFE rated filter elements, Hy-Dry breathers and adding off-line contamination solutions where needed are a small expense compared to the cost of contamination related component repair and replacement, premature fluid replacement, increased maintenance demands and, worst of all, downtime. By taking these small steps and becoming proactive in preventing contamination, you're setting yourself and your plant up with the best possible chance for success.

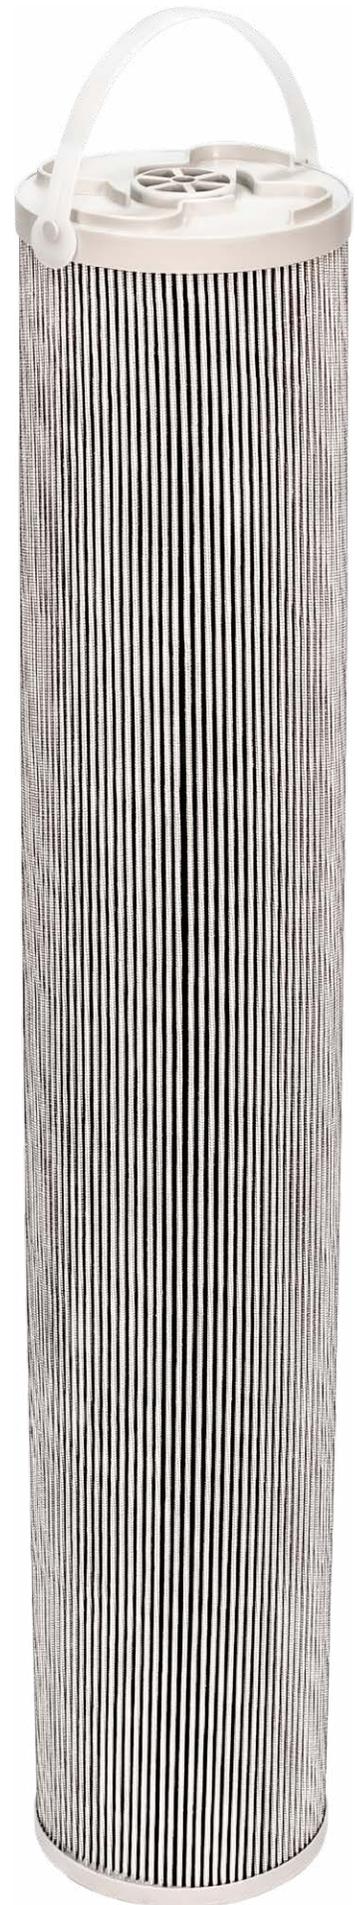

# Recommended\* Upper Limit ISO Cleanliness Codes per Component by Pressure Rating

	Pressure <2000 psi (138 bar)		Pressure 2000-3000 psi (138-207 bar)		Pressure >3000 psi (207 bar)	
	Industry Standard	Donaldson Hy-Pro Recommended	Industry Standard	Donaldson Hy-Pro Recommended	Industry Standard	Donaldson Hy-Pro Recommended
<b>Pumps</b>						
Fixed gear	20/18/15	≤ 17/15/12	19/17/15	≤ 16/14/11	-	-
Fixed piston	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10	17/15/12	≤ 15/13/10
Fixed vane	20/18/15	≤ 17/15/12	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10
Variable piston	18/16/13	≤ 16/14/11	17/15/13	≤ 15/13/10	16/14/12	≤ 15/13/10
Variable vane	18/16/13	≤ 16/14/11	17/15/12	≤ 15/13/10	-	-
<b>Valves</b>						
Cartridge	18/16/13	≤ 16/14/11	17/15/12	≤ 15/13/10	17/15/12	≤ 15/13/10
Check valve	20/18/15	≤ 17/15/12	20/18/15	≤ 17/15/12	19/17/14	≤ 16/14/11
Directional (solenoid)	20/18/15	≤ 17/15/12	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10
Flow control	19/17/14	≤ 17/15/12	18/16/13	≤ 16/14/11	18/16/13	≤ 16/14/11
Pressure control (modulating)	19/17/14	≤ 17/15/12	18/16/13	≤ 16/14/11	17/15/12	≤ 15/13/10
Proportional cartridge valve	17/15/12	≤ 15/13/10	17/15/12	≤ 15/13/10	16/14/11	≤ 14/12/9
Proportional directional	17/15/12	≤ 15/13/10	17/15/12	≤ 15/13/10	16/14/11	≤ 14/12/9
Proportional flow control	17/15/12	≤ 15/13/10	17/15/12	≤ 15/13/10	16/14/11	≤ 14/12/9
Proportional pressure control	17/15/12	≤ 15/13/10	17/15/12	≤ 15/13/10	16/14/11	≤ 14/12/9
Servo valve	16/14/11	≤ 14/12/9	16/14/11	≤ 14/12/9	15/13/10	≤ 13/11/8
<b>Bearings</b>						
Ball bearing	15/13/10	≤ 15/13/10	-	-	-	-
Gearbox (industrial)	17/16/13	≤ 15/13/10	-	-	-	-
Journal bearing (high speed)	17/15/12	≤ 15/13/10	-	-	-	-
Journal bearing (low speed)	17/15/12	≤ 15/13/10	-	-	-	-
Roller bearing	16/14/11	≤ 15/13/10	-	-	-	-
<b>Actuators</b>						
Cylinders	17/15/12	≤ 16/14/11	16/14/11	≤ 15/13/10	15/13/10	≤ 15/13/10
Vane motors	20/18/15	≤ 17/15/12	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10
Axial piston motors	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10	17/15/12	≤ 15/13/10
Gear motors	20/18/14	≤ 17/15/12	19/17/13	≤ 16/14/11	18/16/13	≤ 15/13/10
Radial piston motors	20/18/15	≤ 17/15/12	19/17/14	≤ 16/14/11	18/16/13	≤ 15/13/10
<b>Other</b>						
Test stands	15/13/10	≤ 15/13/10	15/13/10	≤ 15/13/10	15/13/10	≤ 15/13/10
Hydrostatic transmissions	17/15/13	≤ 16/14/11	16/14/11	≤ 15/13/10	16/14/11	≤ 15/13/10
High pressure fuel injector or common fuel rail	18/16/13	≤ 16/14/11	18/16/13	≤ 15/13/10	18/16/13	≤ 15/13/10

\*Depending upon system volume and severity of operating conditions a combination of filters with varying degrees of filtration efficiency might be required (i.e. pressure, return, and off-line filters) to achieve and maintain the desired fluid cleanliness.


# Bearing & Component Life Extension

Improving fluid cleanliness means reduced downtime, more reliable equipment, longer fluid life, and fewer maintenance hours. In addition, it also means reduced component replacement and repair expenses.

By improving the cleanliness of your fluid by only a few ISO Codes, you can directly increase the lifespan of your components and equipment. The tables on the following page demonstrate the life extension for both roller contact bearings and hydraulic components given a reduction in ISO Codes.

## How clean is your *new* oil?

As it turns out, new oil can be one of the worst sources of particulate and water contamination.

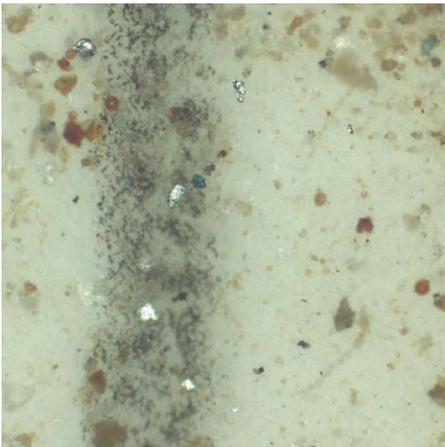

The picture above was taken from a patch test at 10x magnification on a new oil sample direct from the manufacturer and shows the level of contamination present in seemingly clean oil.

A good upper limit for new oil cleanliness is 16/14/11. However, a commonly seen ISO Code for new oil reaches an ISO Code of 25/22/19, which is not only not suitable for hydraulic or lubrication systems but can actually be a major cause of degradation and premature component failure.

Donaldson Hy-Pro will help you develop a plan to achieve and maintain target fluid cleanliness. Arm yourself with the support, training, tools and practices to operate more efficiently, maximize uptime and save money.



# Hydraulic Component Life Extension

Current ISO Code	New ISO Code	New ISO Code	New ISO Code	New ISO Code
	2 x Life	3 x Life	4 x Life	5 x Life
28/26/23	25/23/21	25/22/19	23/21/18	22/20/17
27/25/22	25/23/19	23/21/18	22/20/17	21/19/16
26/24/21	23/21/18	22/20/17	21/19/16	21/19/15
25/23/20	22/20/17	21/19/16	20/18/15	19/17/14
24/22/19	21/19/16	20/18/15	19/17/14	18/16/13
23/21/18	20/18/15	19/17/14	18/16/13	17/15/12
22/20/17	19/17/14	18/16/13	17/15/12	16/14/11
21/19/16	18/16/13	17/15/12	16/14/11	15/13/10
20/18/15	17/15/12	16/14/11	15/13/10	14/12/9
19/17/14	16/14/11	15/13/10	14/12/9	13/11/8
18/16/13	15/13/10	14/12/9	13/11/8	-
17/15/12	14/12/9	13/11/8	-	-
16/14/11	13/11/8	-	-	-
15/13/10	13/11/8	-	-	-
14/12/9	13/11/8	-	-	-

# Roller Contact Bearing Life Extension

Current ISO Code	New ISO Code	New ISO Code	New ISO Code	New ISO Code
	2 x Life	3 x Life	4 x Life	5 x Life
28/26/23	25/23/19	22/20/17	20/18/15	19/17/14
27/25/22	23/21/18	21/19/16	19/17/14	18/16/13
26/24/21	22/20/17	20/18/15	18/16/13	17/15/12
25/23/20	21/19/16	19/17/14	17/15/12	16/14/11
24/22/19	20/18/15	18/16/13	16/14/11	15/13/10
23/21/18	19/17/14	17/15/12	15/13/10	14/12/9
22/20/17	18/16/13	16/14/11	14/12/9	13/11/8
21/19/16	17/15/12	15/13/10	13/11/8	-
20/18/15	16/14/11	14/12/9	-	-
19/17/14	15/13/10	13/11/8	-	-
18/16/13	14/12/9	-	-	-
17/15/12	13/11/8	-	-	-
16/14/11	13/11/8	-	-	-
15/13/10	13/11/8	-	-	-
14/12/9	13/11/8	-	-	-

# Fluid Life Extension

Our mission is to make our customers as efficient as possible, and we achieve that with the highest quality filtration products and total system cleanliness strategies to maximize uptime, productivity and prevent costly fluid contamination related failures. Been there. Done that. Going to do it again tomorrow. But that's not the only way we make our customers efficient. Extending the useful life of in-service fluids pays big dividends in reliability, saves money on premature fluid replacement costs, and reduces the environmental impact of industry by reducing the amount of fluids used and discarded. Enhancing reliability, saving money, and protecting the environment are not only good business, they're our responsibility. To help reduce oil usage, let's first understand why fluids are condemned and prematurely replaced.

## Changing on time.

Routine oil changes based on operating hours for in service oil are common for large diesel engines, gearboxes, and mobile equipment hydraulics to name a few. For instance, one of our customers operating in the drilling industry opted for a dedicated off-line contamination solution that addressed particulate and water contamination plus a routine oil analysis instead of their normal 45 day oil change, extending their useful oil life to over a year. By implementing filtration and pro-actively monitoring their fluid, they were able to save millions of dollars per year on oil costs alone.

In a large diesel engine application, lube oil was changed every 500 hours based on OEM requirements to change once the Total Base Number had dropped to 50% of new. By installing the right off-line Donaldson Hy-Pro solution, TBN was maintained in the acceptable range well beyond 2000 hours of engine operation. In this case, incorporating proper filtration enabled the customer to quadruple engine oil life, saving big money on oil. And since the units were remotely located, their savings were compounded with the reduction in maintenance and man hours.

An operator of large haul trucks now uses DHP filter carts with a particle monitor in lieu of dumping hydraulic drive oil during routine service. The systems are operating cleaner than ever and the oil is only changed after oil analysis indicates a viscosity loss or additive depletion.



## Cleaning oil saves you from changing it.

Coal pulverizer gearbox oil is often filtered with a wire mesh strainer, and the oil is usually changed once it's so dirty you can't see through it. The trouble is the gearbox is on a crash course with a premature rebuild even if the oil is changed annually. The FSW (pictured below), combined with a Hy-Dry breather, maintains gearbox fluid cleanliness, avoiding a rebuild. Properly located sample ports on the FSW allow for accurate oil sampling and analysis. In hydraulic and lube systems dirt makes more dirt, but if we keep fluids clean, they can be changed based on oil condition. Commit to control gearbox contamination with DHP and greatly extend the life of in service gearbox oil.



## Protect fluid additives and bottom line profitability.

When today's group II turbine oils are condemned, it means they have high varnish potential or the sacrificial anti-oxidant (AO) additive levels have dropped below 20% of new. FSTO turbine oil conditioning systems will remove and prevent varnish, but that's not all they do. Both systems also remove oxidation by-products on the molecular level as they are created, greatly reducing the consumption of AO additives. And by maintaining high levels of your AO additives, DHP can double or even triple your turbine oil useful life.

# Fluid Life Extension

## Demulsibility is life or death for oil.

And when it's gone, so is the oil. But what is demulsibility? It's the ability of the oil and water to naturally separate, and it is usually a function of the purity of the oil's base stock. Steel mill lube oils are exposed to high levels of particulate and water contamination. Wire mesh strainers are usually used for filtration, allowing ISO Codes to rise above acceptable limits. For water control, mills rely on the oil's natural demulsibility characteristic to shed water which they decant from the reservoir daily. Eventually, the stress of excessive particulate contamination and continuous operation at or above water saturation point causes the oil to lose its demulsibility. Antiquated centrifuges don't cut it. You need a total Morgoil solution, precisely what DHP's VUD delivers. The VUD offers high efficiency particulate removal and removal of free, emulsified and dissolved water that stays ahead of ingress. That means healthy oil, no decanting, less oil down the drain, and longer Morgoil useful life.



Group II turbine lube oil demulsibility can be compromised by oxidation by-products and acids. These polar forms of contamination occur during oxidation and form bonds with water which prevent the natural separation of oil and water. FSTO remove acids and oxidation by-products and have been proven to restore the demulsibility of turbine oil. Before you dump your turbine oil, let us test it. We might just be able to raise the dead to save your oil and your budget.



## No need for EHC bleed and feed.

Steam turbines and high temp hydraulic applications run on phosphate ester fire resistant fluids which are difficult to maintain. Phosphate ester has little to no additives, but it attracts water. When exposed to water, hydrolysis creates aggressive acids. Fullers earth and Selexsorb filters are used to remove acids but they also add dissolved metal ions to the oil, causing servo valve deposits, slow response time and unit trips. Before that, the contamination causes resistivity to drop and the ISO Codes to rise even further. Then the fluid supplier will recommend a partial bleed and feed or a total flush followed by complete fluid replacement. Sounds like a complicated situation with an expensive solution that won't solve the problem. Don't buy more fluid or flush!



FSAPE is DHP's total solution for phosphate ester fluid maintenance that not only prevents deposits but excels at removing water and acid, lowering ISO Codes, removing dissolved metals and, yes, can even restore resistivity to keep all of your key fluid metrics in the green.

Don't settle for maintenance mediocrity and premature fluid replacement. Treat your fluids like an important system component and see the financial and environmental impact you can have.

# Fluid Analysis Reference Guide

## Industrial Oil Viscosities - ISO 3448

ISO 3448 established common viscosity classifications for industrial lubricants that are widely accepted and used across the globe. Each of your oils fall under a specific category of ISO VG classification which you can obtain from the manufacturer and are often listed on test reports you will receive from fluid sample analyses.



The table below outlines the viscosity measurements per ISO 3448 along with common minimum and optimum viscosities for various systems you'll likely find operating in your facility.



On the following page are contaminants found on fluid analysis test reports listed according to their chemical symbol (often how they'll be listed on the reports) and the various sources from which they are known to occur.

Viscosity Range	ISO 3448 Viscosity Class	Kinematic Viscosity Mid-point cSt @ 40°C	Kinematic Viscosity Minimum cSt @ 40°C	Kinematic Viscosity Maximum cSt @ 40°C
	ISO VG 32	32	28.8	35.2
	ISO VG 46	46	41.4	50.6
	ISO VG 68	68	61.2	74.8
	ISO VG 100	100	90	110
	ISO VG 150	150	135	165
	ISO VG 220	220	198	242
	ISO VG 320	320	288	352
	ISO VG 460	460	414	506
	ISO VG 680	680	612	748

Minimum Viscosities	Application	Viscosity cSt @ 40°C
	Gearbox Reducers	33
	Gear Pumps	30
	Spherical Roller Bearings	21
	Other Roller Bearings	13
	Hydraulic Systems	13
	Plain Bearings	13
	To Support Dynamic Load	4

Optimum Viscosities (at Operating Temp)	Application	Viscosity cSt @ 40°C
	Hydraulic Systems	25
	Plain Bearings	30
	Spur & Helical Gears	40
	Hypoid Gears	60
	Worm Gears	75

## Oil Analysis Test Categories

<b>Xx</b> Name	<b>Wear Metals</b>	<b>Xx</b> Name	<b>Additives</b>	<b>Xx</b> Name	<b>Contaminants</b>
-------------------	--------------------	-------------------	------------------	-------------------	---------------------


<b>Al</b> Aluminum	<ul style="list-style-type: none"> <li>Bearings</li> <li>Blocks</li> <li>Blowers</li> <li>Bushings</li> <li>Clutches</li> <li>Cylinders</li> <li>Housings</li> <li>Pistons</li> <li>Pump Bearings</li> <li>Motor Housings</li> <li>Rotors</li> <li>Thrust Bearings</li> <li>Thrust Washers</li> </ul>	<ul style="list-style-type: none"> <li>Alumina</li> <li>Bauxite</li> <li>Catalyst</li> <li>Coal</li> <li>Fly Ash</li> <li>Foundry Dust</li> <li>Granite</li> <li>Grease Thickener</li> <li>Paint</li> <li>Road Dust</li> </ul>
<b>Sb</b> Antimony	<ul style="list-style-type: none"> <li>Alloy Steel</li> </ul>	<ul style="list-style-type: none"> <li>Ceramic Products</li> <li>Paint</li> </ul>
<b>Ba</b> Barium	<ul style="list-style-type: none"> <li>Fuel Additive</li> <li>Grease Thickener</li> <li>Oil Additive: Detergent</li> </ul>	
<b>Be</b> Beryllium	<ul style="list-style-type: none"> <li>Alloy Steel</li> </ul>	
<b>B</b> Boron	<ul style="list-style-type: none"> <li>Coolant Inhibitor</li> <li>Oil Additive: Anti Wear</li> </ul>	<ul style="list-style-type: none"> <li>Oil Additive: Ext Pressure</li> <li>Oil Additive: Detergent</li> </ul>
<b>Cd</b> Cadmium	<ul style="list-style-type: none"> <li>Journal Bearings</li> <li>Plating</li> </ul>	
<b>Ca</b> Calcium	<ul style="list-style-type: none"> <li>Cement Dust</li> <li>Fuller's Earth</li> <li>Grease Thickener</li> <li>Gypsum</li> <li>Hard Water</li> <li>Lignite</li> </ul>	<ul style="list-style-type: none"> <li>Hard Rock Dust</li> <li>Oil Additive: Detergent</li> <li>Oil Additive: Rust Inhibitor</li> <li>Road Dust</li> <li>Rubber</li> <li>Salt Water</li> <li>Slag</li> </ul>
<b>Cr</b> Chromium	<ul style="list-style-type: none"> <li>Exhaust Valves</li> <li>Sleeve Liners</li> <li>Low Alloy Steel</li> <li>Oil Coolers</li> <li>Rings</li> <li>Rods</li> </ul>	<ul style="list-style-type: none"> <li>Roller Bearings</li> <li>Stainless Steel</li> <li>Taper Bearings</li> <li>Water Treatment</li> <li>Paint</li> </ul>
<b>Cu</b> Copper	<ul style="list-style-type: none"> <li>Babbitt Bearings (Underlay)</li> <li>Bearing Cage</li> <li>Brass</li> <li>Bronze</li> <li>Cam Bushings</li> <li>Clutches</li> <li>Governors</li> <li>Guides</li> <li>Oil Coolers</li> </ul>	<ul style="list-style-type: none"> <li>Oil Pumps</li> <li>Pump Piston &amp; Thrust Plate</li> <li>Steering Disc</li> <li>Valve Train Bushings</li> <li>Wear Plates</li> <li>Wrist Pin Bushings</li> <li>Oil Additive: Anti Wear</li> <li>Paint</li> </ul>
<b>Fe</b> Iron	<ul style="list-style-type: none"> <li>Bearings</li> <li>Blocks</li> <li>Brake Pads</li> <li>Cam Shaft</li> <li>Cast Iron</li> <li>Crankshafts</li> <li>Cylinders</li> <li>Discs</li> <li>Gears</li> <li>Housings</li> </ul>	<ul style="list-style-type: none"> <li>Hydraulic Pump</li> <li>Vanes</li> <li>Gears</li> <li>Pistons</li> <li>Liners</li> <li>Oil Pump</li> <li>Power Take Off (PTO)</li> <li>Rings</li> <li>Screws</li> <li>Shafts</li> </ul>

## Predictor Source of Spectrometry Metals

<b>Wear Metals</b>	<b>Contaminants &amp; Abrasives</b>
--------------------	-------------------------------------

<b>Pb</b> Lead	<ul style="list-style-type: none"> <li>Babbitt</li> <li>Journal Bearing (Overlay)</li> <li>Bronze Alloy</li> <li>Solder</li> <li>Balancing Weights</li> </ul>	<ul style="list-style-type: none"> <li>Gasoline Additives</li> <li>Paint</li> <li>Road Dust</li> </ul>
<b>Mg</b> Magnesium	<ul style="list-style-type: none"> <li>Turbine Metallurgy</li> </ul>	<ul style="list-style-type: none"> <li>Hard Water</li> <li>Oil Additive: Detergent</li> <li>Road Dust</li> <li>Sea Water</li> <li>Fuller's Earth</li> </ul>
<b>Mo</b> Molybdenum	<ul style="list-style-type: none"> <li>Alloy Steel</li> <li>Ring</li> </ul>	<ul style="list-style-type: none"> <li>Oil Additive: Ext Pressure</li> <li>Grease</li> </ul>
<b>Ni</b> Nickel	<ul style="list-style-type: none"> <li>Hardened Steels</li> <li>Stainless Steel</li> <li>Plating</li> </ul>	
<b>P</b> Phosphorous		<ul style="list-style-type: none"> <li>Oil Additive: Anti Wear</li> <li>Oil Additive: Ext Pressure</li> </ul>
<b>K</b> Potassium	<ul style="list-style-type: none"> <li>Coolant Inhibitor</li> <li>Fly Ash</li> <li>Fuel Element</li> </ul>	<ul style="list-style-type: none"> <li>Granite</li> <li>Paper Dust</li> <li>Road Dust</li> </ul>
<b>Si</b> Silicon	<ul style="list-style-type: none"> <li>Alloy Steel</li> <li>Asbestos</li> <li>Cement Dust</li> <li>Fly Ash</li> <li>Road Dust</li> <li>Glass</li> </ul>	<ul style="list-style-type: none"> <li>Granite</li> <li>Grease</li> <li>Limestone</li> <li>Oil Additive: Antifoam</li> <li>Synthetic Lubricant</li> <li>Sealant</li> </ul>
<b>Ag</b> Silver	<ul style="list-style-type: none"> <li>Bearing (Overlay)</li> <li>Needle Bearings</li> </ul>	<ul style="list-style-type: none"> <li>Oil Cooler (Solder)</li> <li>Wrist Pin Bushings</li> </ul>
<b>Na</b> Sodium	<ul style="list-style-type: none"> <li>Activated Alumina</li> <li>Coolant Inhibitor</li> <li>Dirt</li> <li>Fly Ash</li> </ul>	<ul style="list-style-type: none"> <li>Grease</li> <li>Oil Additives</li> <li>Paper Mill Dust</li> <li>Road Salt</li> </ul>
<b>Sn</b> Tin	<ul style="list-style-type: none"> <li>Bearing Cage</li> <li>Babbitt</li> <li>Bearing Flashing</li> </ul>	<ul style="list-style-type: none"> <li>Piston Overlay</li> <li>Solder</li> </ul>
<b>Ti</b> Titanium	<ul style="list-style-type: none"> <li>Gas Turbine Bearings</li> <li>Turbine Blades</li> </ul>	<ul style="list-style-type: none"> <li>Paint</li> </ul>
<b>V</b> Vanadium	<ul style="list-style-type: none"> <li>Turbine Blades</li> <li>Valves</li> </ul>	<ul style="list-style-type: none"> <li>Bunker Oil</li> </ul>
<b>Zn</b> Zinc	<ul style="list-style-type: none"> <li>Brass</li> <li>Plating</li> </ul>	<ul style="list-style-type: none"> <li>Cathodic Protection</li> <li>Galvanizing</li> <li>Grease</li> <li>Oil Additive: Anti Wear</li> </ul>

# Donaldson Hy-Pro Solutions App

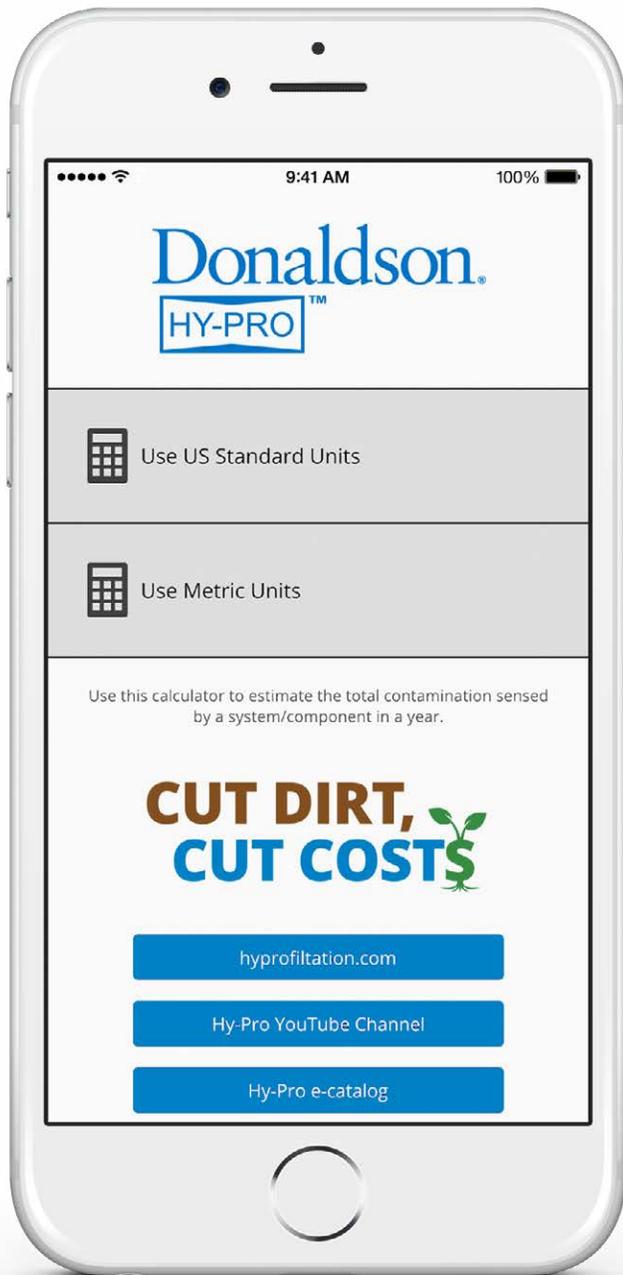

## Download Our App Donaldson Hy-Pro Solutions



Available on the  
App Store and  
on Google Play™

Calculate the amount of contamination that passes through your hydraulic components and bearings annually with the our app, Donaldson Hy-Pro Solutions.


Just enter current and target ISO Fluid Cleanliness Codes, flow rate and daily operating hours to understand the impact of dirty vs. clean oil. Raise awareness, improve reliability, and save money by minimizing component repair and replacement costs while extending useful fluid life. Put Donaldson Hy-Pro on your lube team and let us help you set a target and implement strategies to achieve and maintain your fluid cleanliness goals.



Apple, the Apple logo, iPad, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc.

## ISO Codes, decoded.

While ISO Cleanliness Codes provide a way to gauge the level of system cleanliness, they can be difficult to interpret. The Donaldson Hy-Pro Solutions app is designed to decode the mystery and provide you with a real-world figure you can actually understand.

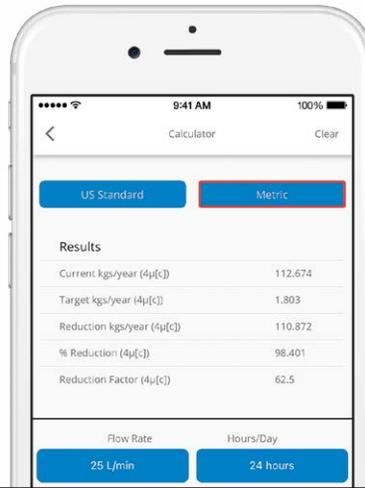


## Everywhere you are.

Download the Donaldson Hy-Pro Solutions App to quickly calculate the effect on your system of lowering ISO Codes. And with effortless conversion between US Standard and Metric, you'll be amazed at the results of hitting target ISO Codes no matter where you are.

## Driven by results.

Do you know how much abrasive dirt you are pumping through sensitive bearings, valves and injectors in a year? The Donaldson Hy-Pro Solutions app will tell you just how much and deliver several calculations to understand the effects of lowering your ISO Codes, in clear cut and easily understood figures.

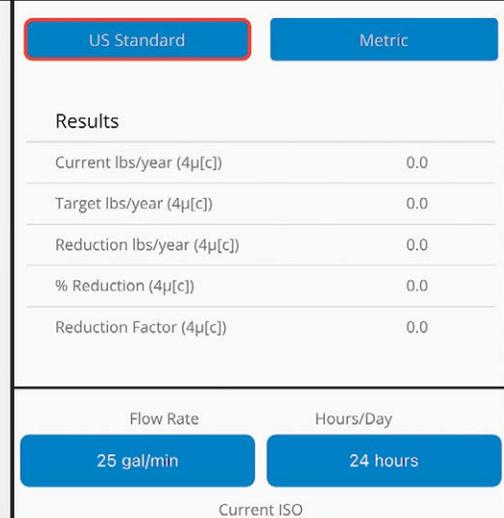

## Make a difference.

The knowledge to make a difference by lowering ISO Codes is at your fingertips. Set the inputs for your system specs to see how much contamination is removed by hitting a target ISO Code.

hyprofiltration.com/




# iCue Connected Technology

Optimize the performance of your Vac-U-Dry Vacuum Dehydrator from any smart device with Donaldson Hy-Pro iCue™ Connected Technology.

The iCue Technology utilizes a series of sensors and cloud-based analytics to monitor the operational status of your filtration system. The technology provides real-time visibility into multiple performance metrics to help enable proactive maintenance and management.

The dashboard provides user alerts when key performance parameters are exceeded so potential issues can be addressed quickly.

Powered by  
**iCue™ Technology**

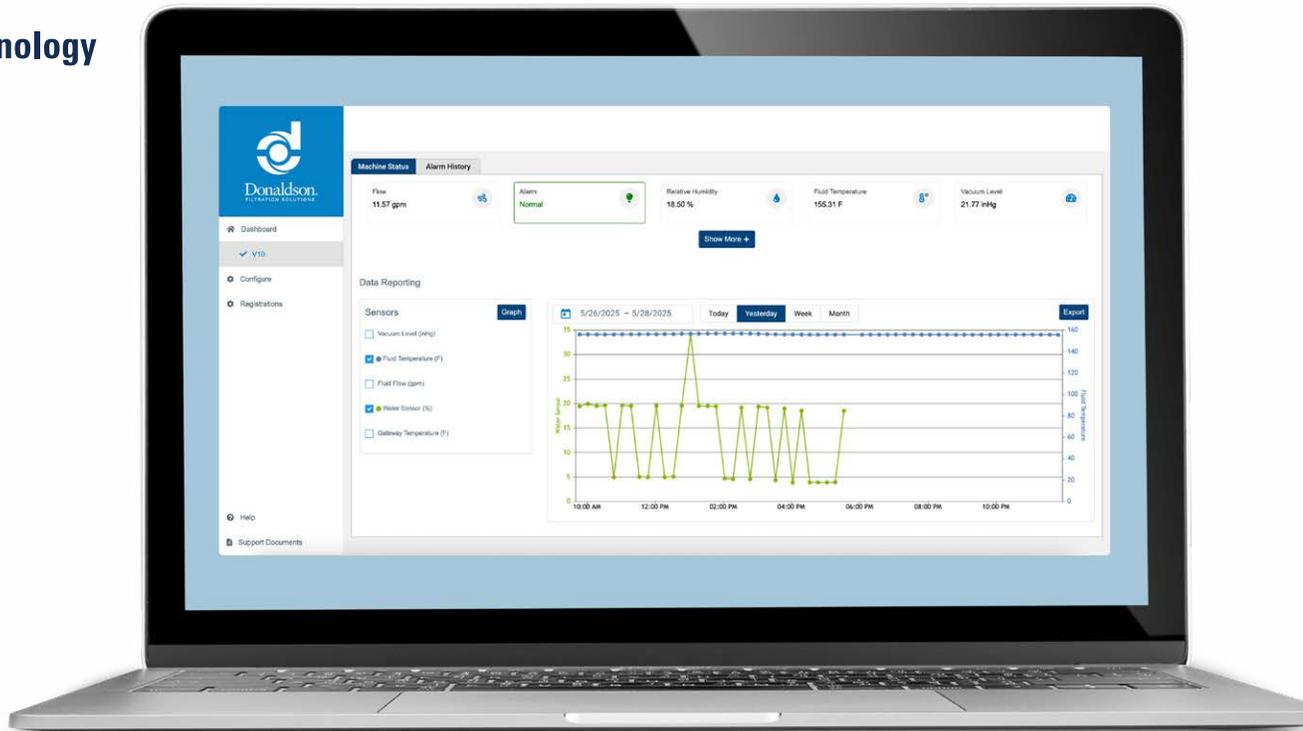

The operational status of your vacuum dehydrator is available through an easy-to-read dashboard on your computer or smart device. The interface provides valuable data that can be used to help make informed decisions about equipment operation, maintenance, and oil quality.

# iCue Technology Primary Sensors



Donaldson Hy-Pro's iCue Technology can help extend equipment life and reduce the need for manual inspections. The system's cloud-based analytics not only alert users when thresholds are breached but also facilitate smarter, faster decisions that keep operations running smoothly.

The technology helps enhance reliability, boost productivity, and supports a maintenance strategy tailored for high-demand, continuous-duty environments.

Engineered to provide efficient water and particulate removal from hydraulic, lubricating, and gear oils, the VUD powered by Donaldson iCue Technology combines industry leading fluid filtration and real-time system monitoring to help deliver optimal performance and uptime.

The VUD utilizes a series of sensors to monitor critical performance metrics during operation. This data provides operators and process owners with updates and actionable insights designed to help increase productivity, minimize downtime, and extend the life of valuable equipment.


The skid-mounted vacuum dehydrator is ideal for continuous duty applications that require consistent monitoring. The iCue Technology provides 24/7 access to operational data through any smart device reducing the need for multiple physical equipment checks.

# Viscosity Reference Chart



## Viscosity Scale Chart

The chart below provides a quick reference for converting between the four major measures of viscosity. To determine equivalents, draw a horizontal line straight across the page at your known viscosity. All other columns that intersect the line represent equivalents.

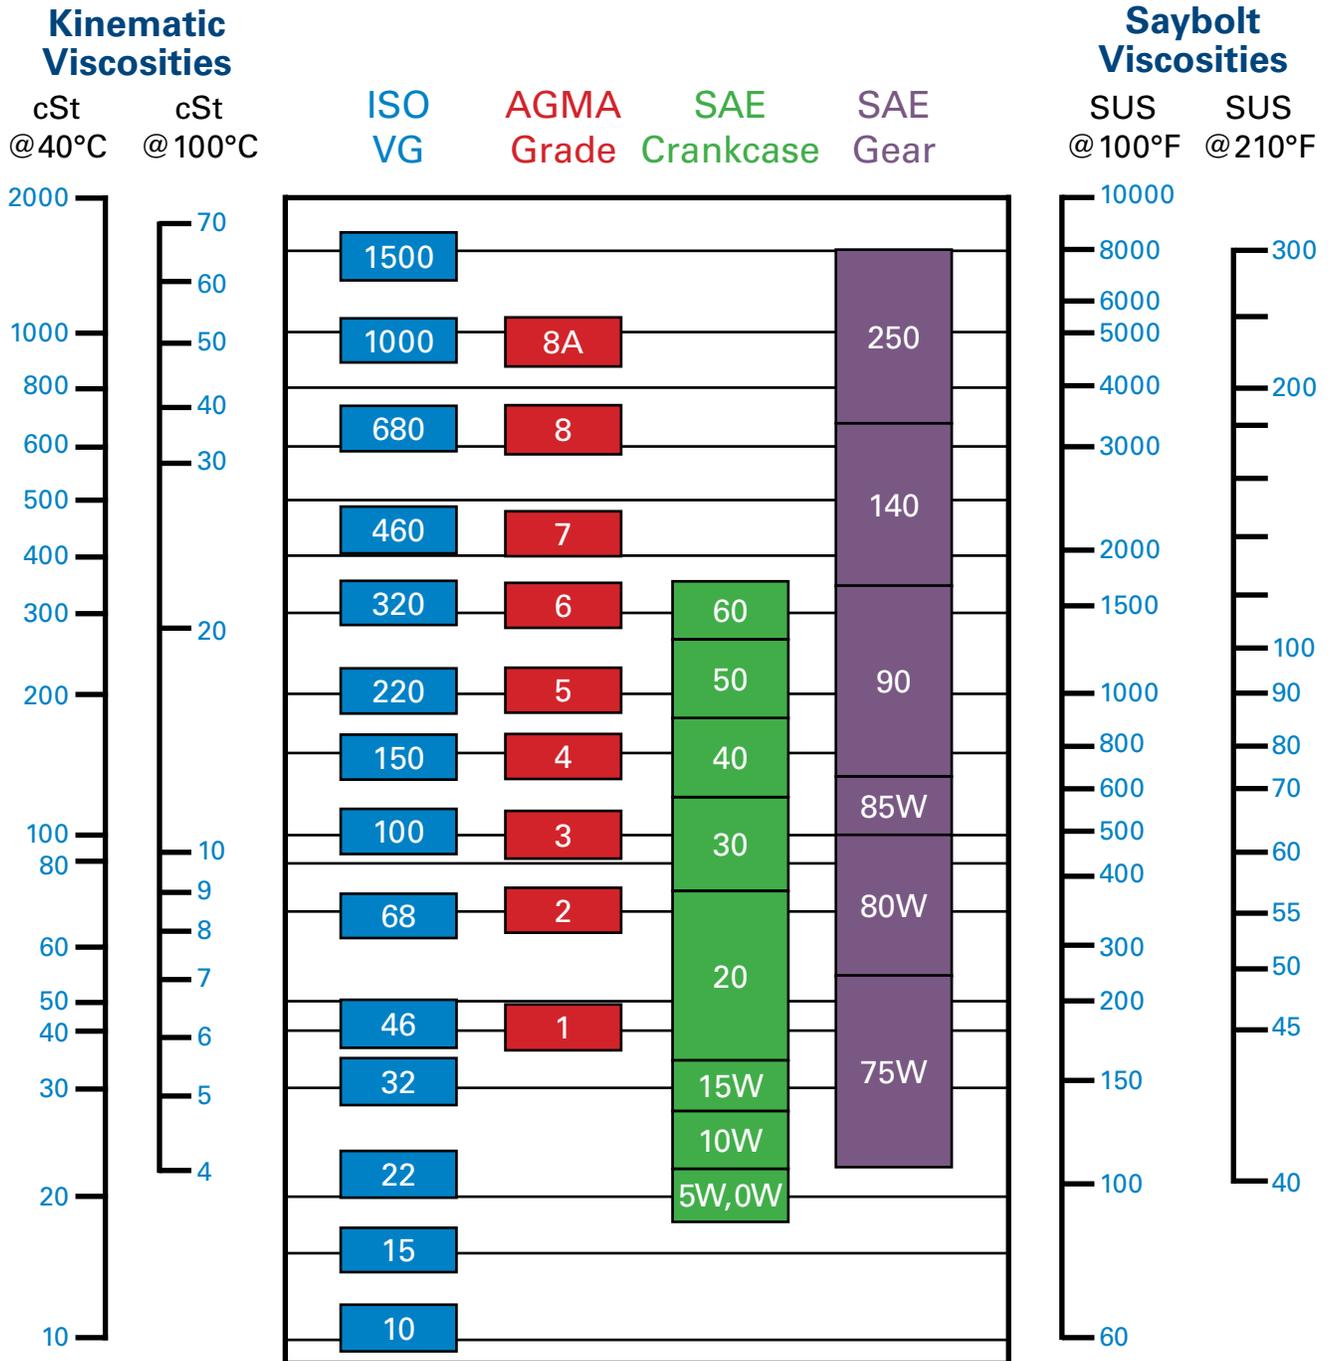

# Viscosity Reference Table




## ISO/Temperature Reference

The table below gives viscosity values in cSt for known ISO VG fluids at specified temperatures using the Kinematic midpoint of each classification according to ISO 3448. Values given below are an approximation subject to variation  $\pm 10\%$  from the midpoint value used in the calculations and are intended to be used as a reference. For exact value ranges, contact your fluid manufacturer.


To determine viscosity, locate your fluid ISO VG across the top, locate your target/specified temperature in the two left hand columns, and the cell in which the respective column and row intersect is the approximate viscosity value.

Temp °F	Temp °C	ISO 22	ISO 32	ISO 46	ISO 68	ISO 100	ISO 150	ISO 220	ISO 320	ISO 460	ISO 680	ISO 1000	ISO 1500
14	-10	315	610	1,130	2,285	4,493	9,277	18,565	36,300	69,775	141,088	283,473	593,291
23	-5	218	405	724	1,401	2,646	5,225	10,013	18,790	34,687	67,151	129,188	258,112
32	0	155	278	481	893	1,625	3,081	5,672	10,249	18,228	33,901	62,665	119,962
41	5	113	196	330	590	1,037	1,893	3,359	5,861	10,072	18,052	32,160	59,188
50	10	85	142	233	402	685	1,207	2,071	3,498	5,825	10,088	17,371	30,828
59	15	65	106	168	282	467	797	1,324	2,171	3,510	5,890	9,828	16,865
68	20	51	80	125	203	327	542	875	1,396	2,196	3,579	5,800	9,648
77	25	40	62	95	150	235	379	596	927	1,422	2,255	3,557	5,748
86	30	32	49	73	113	173	272	417	633	950	1,468	2,259	3,554
95	35	27	39	58	87	130	200	300	445	652	986	1,481	2,274
104	40	22	32	46	68	100	150	220	320	460	680	1,000	1,500
113	45	19	26	37	54	78	115	165	235	332	481	694	1,018
122	50	16	22	31	44	62	89	126	177	245	348	493	709
131	55	13	19	26	36	50	71	98	135	185	258	358	506
140	60	12	16	22	30	41	57	78	105	142	194	266	369
149	65	10	14	18	25	34	46	62	83	110	149	201	275
158	70	9	12	16	21	28	38	51	67	87	117	155	208
167	75	8	10	14	18	24	32	42	54	70	92	121	161
176	80	7	9	12	16	20	27	35	45	57	74	96	126
185	85	6	8	11	14	18	23	29	37	47	60	77	100
194	90	6	7	9	12	15	12	25	31	39	50	63	81
203	95	5	7	8	11	13	17	21	27	33	42	52	66
212	100	5	6	7	9	12	15	18	23	28	35	43	54
221	105	4	5	7	8	10	13	16	20	24	30	37	45
230	110	4	5	6	8	9	12	14	17	21	25	31	38
239	115	4	5	6	7	8	10	12	15	18	22	27	32
248	120	3	4	5	6	8	9	11	13	16	19	23	28
257	125	3	4	5	6	7	8	10	12	14	17	20	24
266	130	3	4	4	5	6	8	9	11	12	15	18	21
275	135	3	3	4	5	6	7	8	10	11	13	15	18
284	140	3	3	4	4	5	6	7	9	10	12	14	16
293	145	2	3	3	4	5	6	7	8	9	11	12	14
302	150	2	3	3	4	4	5	6	7	8	10	11	13

# Viscosity Reference Charts

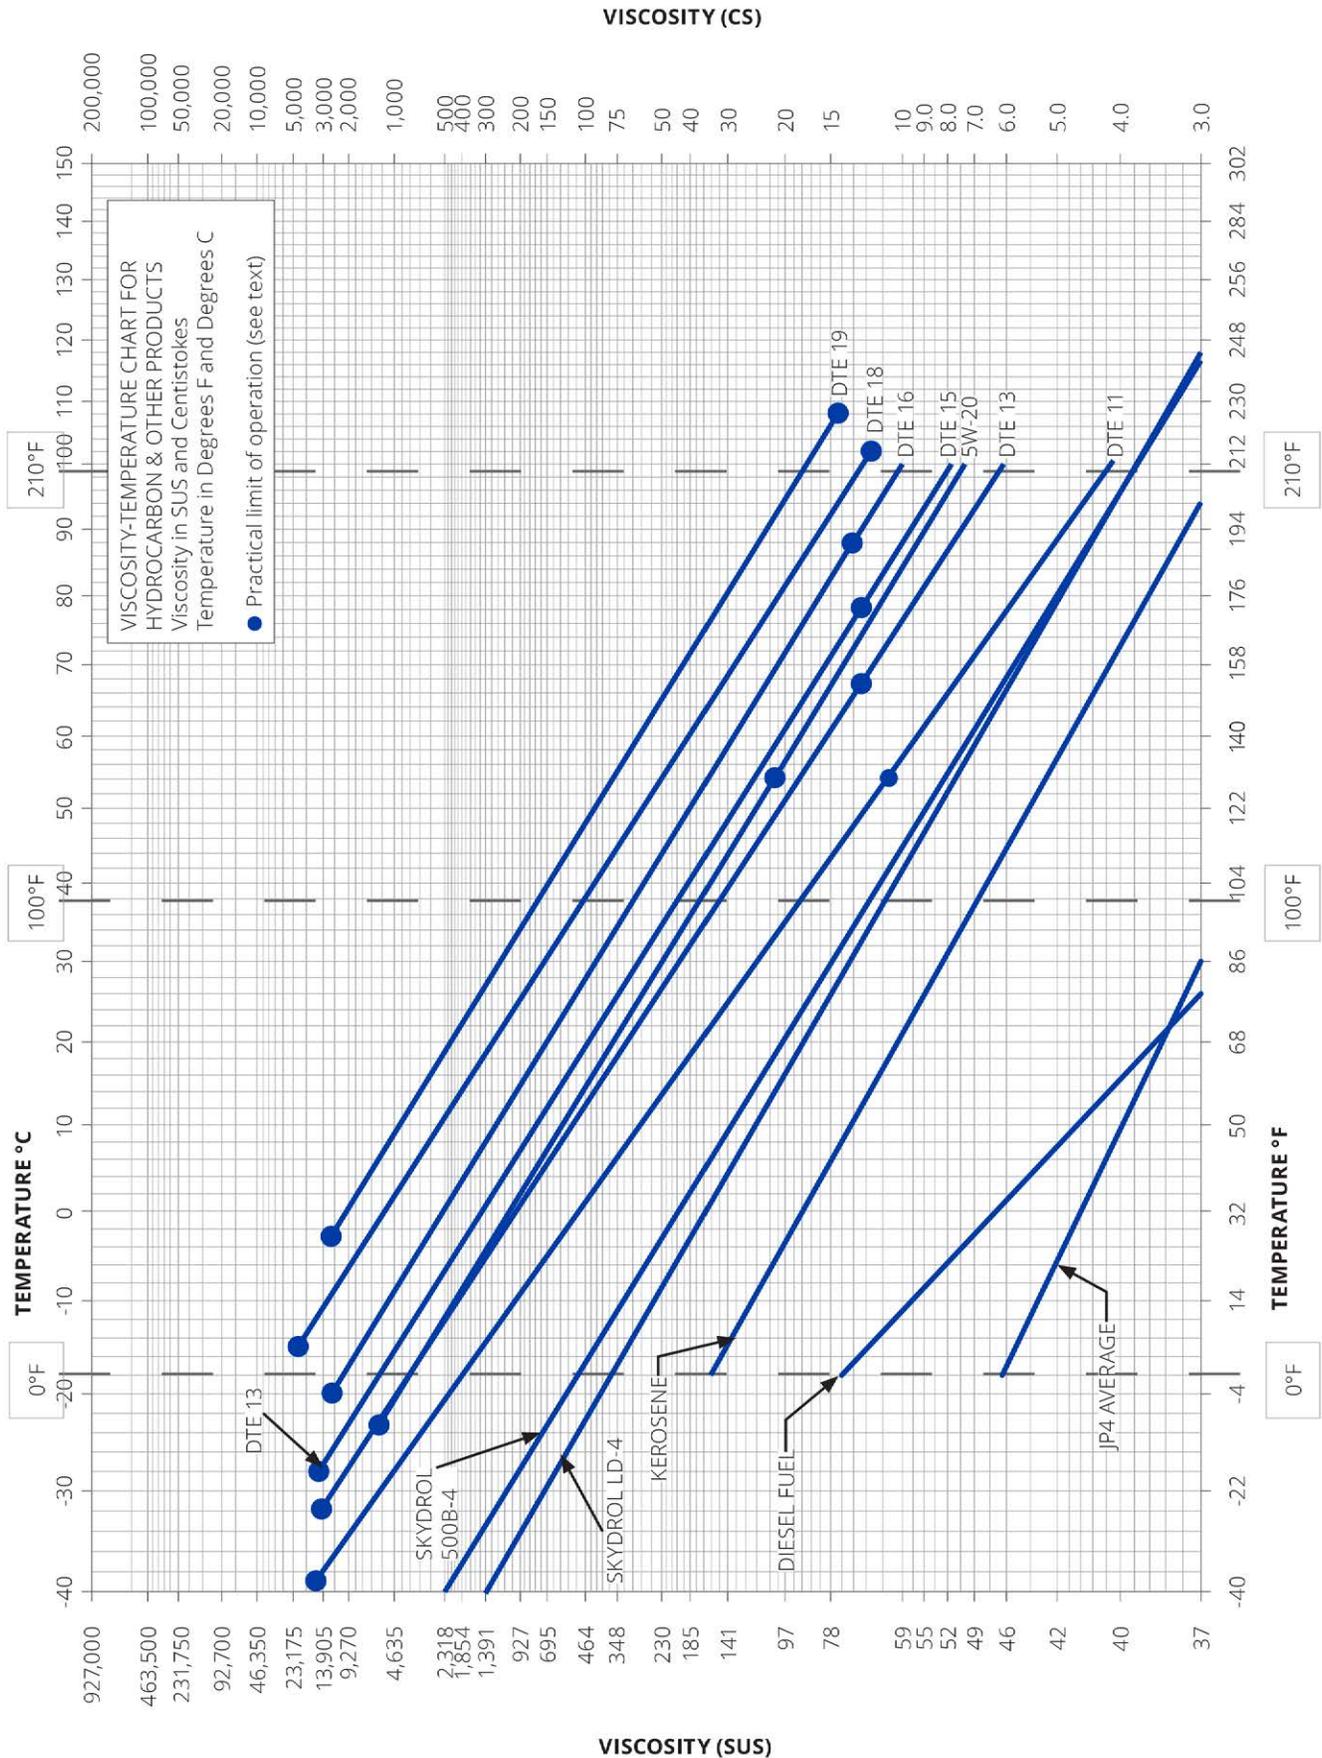

# Viscosity Reference Charts

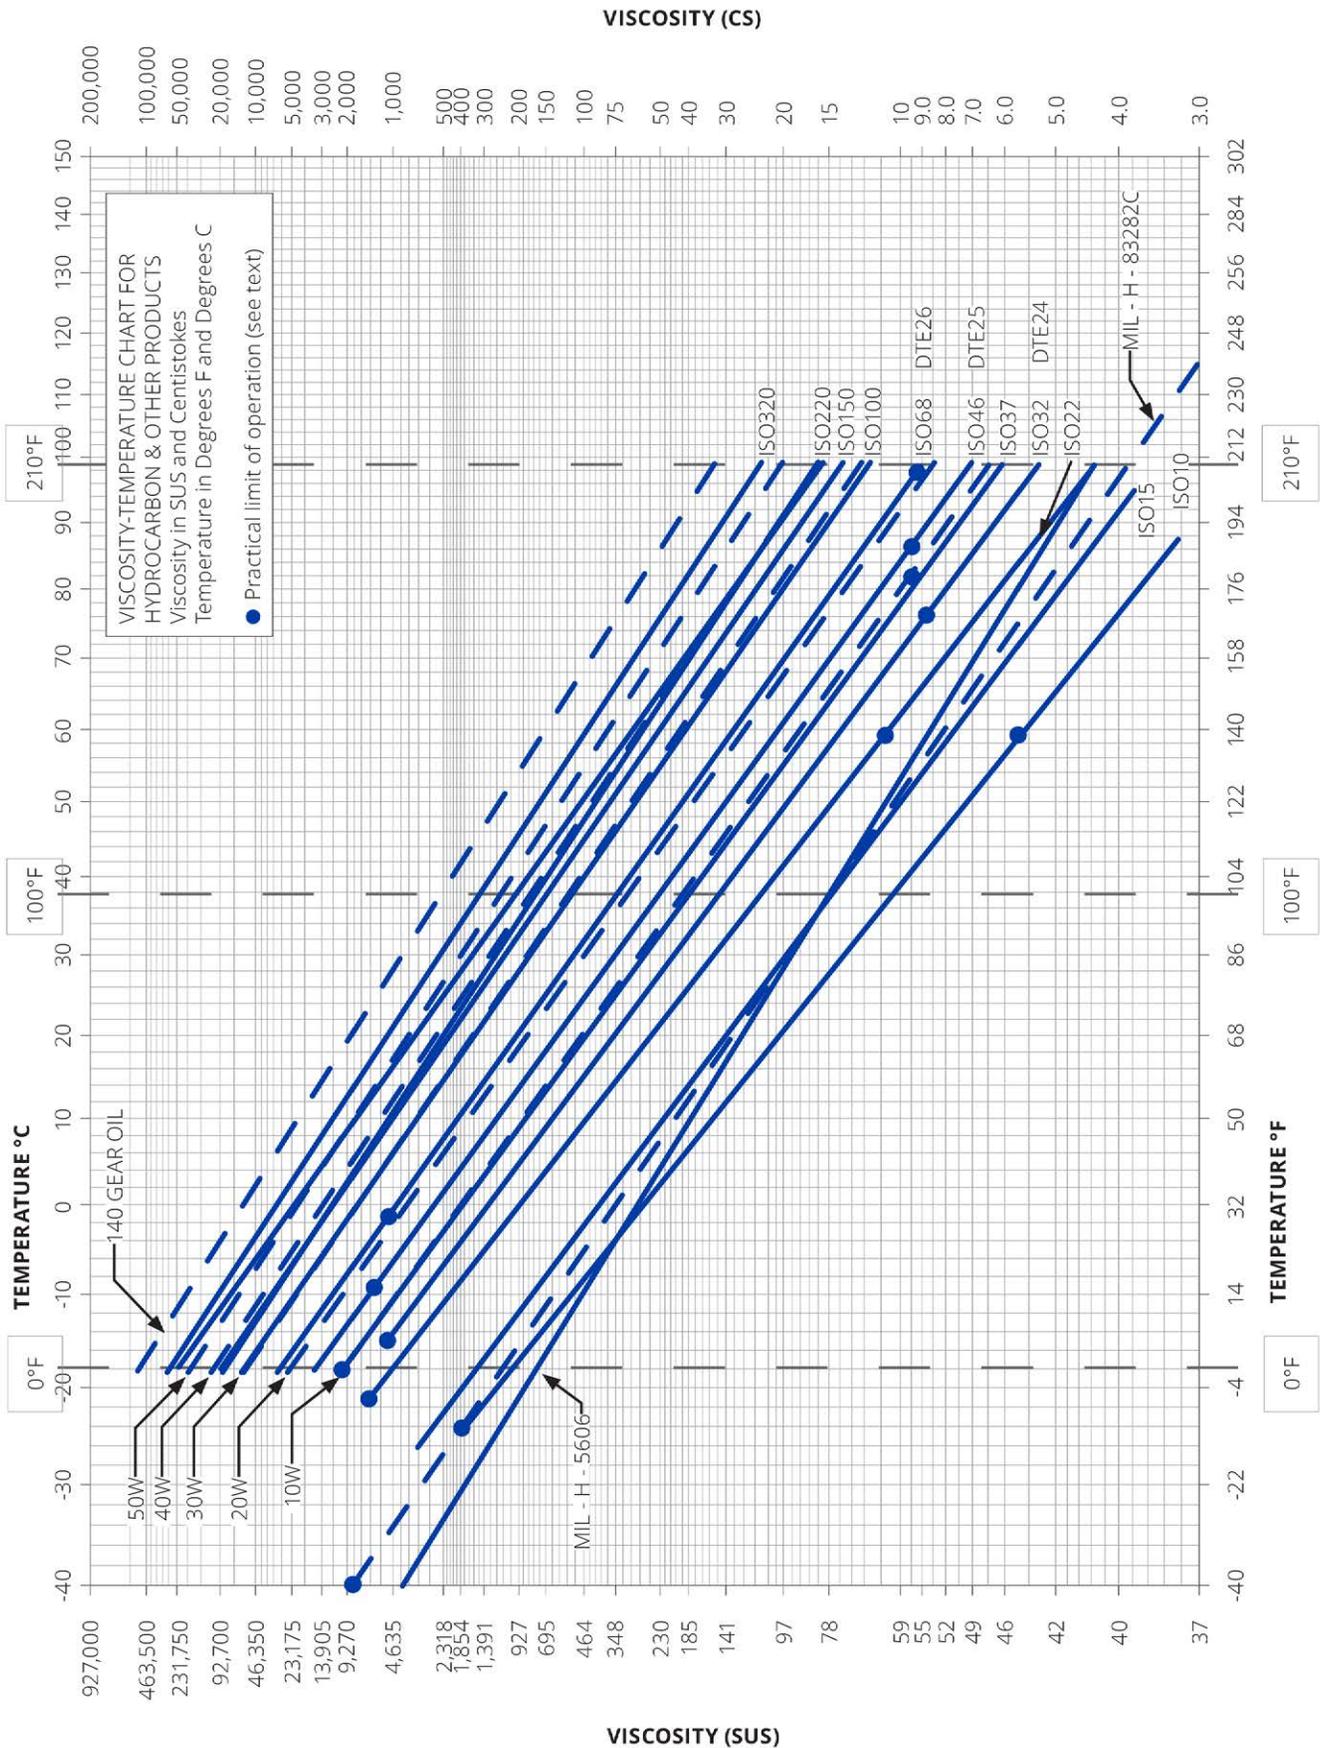

# Filter Assembly Sizing

## Filter Assembly Sizing Guidelines

Effective filter sizing requires consideration of flow rate, viscosity (operating and cold start), fluid type and degree of filtration. When properly sized, bypass during cold start can be avoided/minimized and optimum element efficiency and life achieved. The filter assembly differential pressure values provided for sizing differ for each media code, and assume 32 cSt (150 SUS) viscosity and 0.86 fluid specific gravity. Use the following steps to calculate clean element assembly pressure drop.

Calculate  $\Delta P$  coefficient Using Saybolt Universal Seconds (SUS)  
for actual viscosity

$$\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (SUS)}}{150} \times \frac{\text{Actual Specific Gravity}}{0.86}$$

Using Centistokes (cSt)

$$\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32} \times \frac{\text{Actual Specific Gravity}}{0.86}$$

Calculate actual clean  
filter assembly  $\Delta P$  at  
both operating and  
cold start viscosity

$$\text{Actual Assembly Clean } \Delta P = \text{Flow Rate} \times \frac{\Delta P \text{ Coefficient (from calculation above)}}{\text{Assembly } \Delta P \text{ Factor (from sizing table)}}$$

Sizing  
recommendations to  
optimize performance  
and permit future  
flexibility

- To avoid or minimize bypass during cold start the actual assembly clean  $\Delta P$  calculation should be repeated for start-up conditions if cold starts are frequent.
- Actual assembly clean  $\Delta P$  should not exceed 10% of bypass  $\Delta P$  gauge/indicator set point at normal operating viscosity.
- If suitable assembly size is approaching the upper limit of the recommended flow rate at the desired degree of filtration consider increasing the assembly to the next larger size if a finer degree of filtration might be preferred in the future. This practice allows the future flexibility to enhance fluid cleanliness without compromising clean  $\Delta P$  or filter element life.
- Once a suitable filter assembly size is determined consider increasing the assembly to the next larger size to optimize filter element life and avoid bypass during cold start.
- When using water glycol or other specified synthetics we recommend increasing the filter assembly by 1~2 sizes.

# Assembly Sizing Example

## Sizing Example:

Replacing existing paper machine lube oil duplex with DLFM4 (4x4) duplex with HP107 series elements. The details of the system are listed below along with a breakdown of the steps to calculate the Actual Assembly Clean ΔP.

<b>Oil:</b>	PM220 (ISO VG 220)	<b>Operating Temp:</b>	125°F
<b>Specific Gravity:</b>	0.86	<b>Flow Rate:</b>	150 gpm
<b>Assembly:</b>	DLFM4 (4x4)	<b>Element:</b>	HP107L36-6MB
<b>Assembly ΔP Factor<sup>2</sup>:</b>	0.0084 psid/gpm	<b>Actual Viscosity<sup>1</sup>:</b>	120 cSt @ 125°F

Calculate ΔP coefficient for actual viscosity

Using Centistokes (cSt)

$$\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32} \times \frac{\text{Actual Specific Gravity}}{0.86}$$

$$\Delta P \text{ Coefficient} = \frac{120}{32} \times \frac{0.86}{0.86}$$

$$\Delta P \text{ Coefficient} = 3.75$$

Calculate actual clean filter assembly ΔP at both operating and cold start viscosity

$$\text{Actual Assembly Clean } \Delta P = \text{Flow Rate} \times \Delta P \text{ Coefficient} \times \text{Assembly } \Delta P \text{ Factor (from sizing table)}^1$$

$$\text{Actual Assembly Clean } \Delta P = 150 \text{ gpm} \times 3.75 \times 0.0084 \text{ psid/gpm}$$

$$\text{Actual Assembly Clean } \Delta P = 4.7 \text{ psid}$$

<sup>1</sup>Actual viscosity conversion information available on page 22.

<sup>2</sup>Assembly clean element ΔP factor can be found on the respective individual assembly data sheets.

# Assembly Sizing Example

## Sizing Example:

Installing an MF3 housing with 16" length code, 50 psid integral bypass and 12M media. The details of the system are listed below along with a breakdown of the steps to calculate the Actual Assembly Clean  $\Delta P$ .

<b>Oil:</b>	AW32 (ISO VG 32)	<b>Operating Temp:</b>	110°F / 50°F cold start
<b>Specific Gravity:</b>	0.86	<b>Flow Rate:</b>	22 gpm
<b>Assembly:</b>	MF3 L16	<b>Element:</b>	HP60L16-12MB
<b>Assembly <math>\Delta P</math> Factor<sup>2</sup>:</b>	0.134 psid/gpm	<b>Actual Viscosity<sup>1</sup>:</b>	25 cSt @ 110°F 140 cSt @ 50°F Cold Start

Calculate  $\Delta P$  coefficient for actual viscosity

Using Centistokes (cSt)

$$\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32} \times \frac{\text{Actual Specific Gravity}}{0.86}$$

@ Operating Temperature

$$\Delta P \text{ Coefficient} = \frac{25}{32} \times \frac{0.86}{0.86}$$

$$\Delta P \text{ Coefficient} = 0.78$$

Cold Start

$$\Delta P \text{ Coefficient} = \frac{140}{32} \times \frac{0.86}{0.86}$$

$$\Delta P \text{ Coefficient} = 4.375$$

Calculate actual clean filter assembly  $\Delta P$  at both operating and cold start viscosity

@ Operating Temperature

$$\text{Actual Assembly Clean } \Delta P = \text{Flow Rate} \times \Delta P \text{ Coefficient} \times \text{Assembly } \Delta P \text{ Factor (from sizing table)}^1$$

$$\text{Actual Assembly Clean } \Delta P = 22 \text{ gpm} \times 0.78 \times 0.134 \text{ psid/gpm}$$

$$\text{Actual Assembly Clean } \Delta P = 2.29 \text{ psid}$$

Cold Start

$$\text{Actual Assembly Clean } \Delta P = 22 \text{ gpm} \times 4.375 \times 0.134$$

$$\text{Actual Assembly Clean } \Delta P = 12.9 \text{ psid}$$

<sup>1</sup>Actual viscosity conversion information available on page 22.

<sup>2</sup>Assembly clean element  $\Delta P$  factor can be found on the respective individual assembly data sheets.

# Assembly Sizing Example

## Sizing Example:

Fitting an FSL2 off-line filtration system to a gearbox using ISO VG 460 gear lubricant. The details of the system are listed below along with a breakdown of the steps to calculate the Actual Assembly Clean ΔP.

<b>Oil:</b>	Gear lube 460 (ISO VG 460)	<b>Operating Temp:</b>	48°C / 16°C cold start
<b>Specific Gravity:</b>	0.90	<b>Flow Rate:</b>	19 lpm
<b>Assembly:</b>	FSL5 (use LF18" 3M assembly)	<b>Element:</b>	HP107L18-3MB
<b>Assembly ΔP Factor<sup>2</sup>:</b>	0.0007 bard/lpm	<b>Actual Viscosity<sup>1</sup>:</b>	280 cSt @ 48°C 2500 cSt @ 16°C Cold Start

Calculate ΔP coefficient for actual viscosity

### Using Centistokes (cSt)

$$\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32} \times \frac{\text{Actual Specific Gravity}}{0.86}$$

### @ Operating Temperature

$$\Delta P \text{ Coefficient} = \frac{280}{32} \times \frac{0.90}{0.86}$$

$$\Delta P \text{ Coefficient} = 8.75$$

### Cold Start

$$\Delta P \text{ Coefficient} = \frac{2500}{32} \times \frac{0.90}{0.86}$$

$$\Delta P \text{ Coefficient} = 81.79$$

Calculate actual clean filter assembly ΔP at both operating and cold start viscosity

### @ Operating Temperature

$$\text{Actual Assembly Clean } \Delta P = \text{Flow Rate} \times \Delta P \text{ Coefficient} \times \text{Assembly } \Delta P \text{ Factor (from sizing table)}^1$$

$$\text{Actual Assembly Clean } \Delta P = 19 \text{ lpm} \times 8.75 \times 0.0007 \text{ bard/lpm}$$

$$\text{Actual Assembly Clean } \Delta P = 0.116 \text{ bard}$$

### Cold Start

$$\text{Actual Assembly Clean } \Delta P = 19 \text{ lpm} \times 81.79 \times 0.0007 \text{ bard/lpm}$$

$$\text{Actual Assembly Clean } \Delta P = 1.08 \text{ bard}$$

<sup>1</sup>Actual viscosity conversion information available on page 22.

<sup>2</sup>Assembly clean element ΔP factor can be found on the respective individual assembly data sheets.

# DFE

## Dynamic Filter Efficiency

---

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



# What is DFE?

## DFE matches filter testing with real-life conditions

All hydraulic and lube systems have a critical contamination tolerance level that is often defined by, but not limited to, the most sensitive system component such as servo valves or high speed journal bearings. Defining the ISO fluid cleanliness code upper limit is a function of component sensitivity, safety, system criticality and ultimately getting the most out of hydraulic and lube assets.

Filters remove the particulate contamination that enters a system or is generated by the system as it operates. All filters are subjected to some form of system dynamics: hydraulic filters encounter frequent and rapid changes in flow rate when valves shift, cylinders unload and pump output changes; lube filters experience dynamic conditions during start up and shut down. Filters validated only to current ISO testing standards don't perform as expected when subjected to the demands of real world dynamic operating systems.

A filter is not a black hole. Two key characteristics of filter performance are capture efficiency and retention efficiency. Capture efficiency can be thought of simply as how effectively a filter captures particles while retention efficiency is a measure of how effectively that filter retains the particles it has captured. A filter is not a black hole, and its performance must not be based solely on how efficiently it captures particles. If not properly designed and applied, a filter can become one of the most damaging sources of contamination in a system if it releases previously captured particles when challenged with dynamic conditions.

The Dynamic Filter Efficiency Test (DFE) is the evolution of standard hydraulic and lube filter performance testing. DFE goes further than current industry standards to quantify capture and retention efficiency in real time by inducing dynamic duty cycles, measuring real-time performance during dynamic changes and the filters ability to retain particles. DFE testing is the method for predicting worst case fluid cleanliness along with average fluid cleanliness. The DFE test method was pioneered in 1998 during a joint effort between Scientific Services Inc (SSI) and Donaldson Hy-Pro.


# Dynamic Filter Efficiency

## Current Filter Performance Testing Methods

To understand the need for DFE it is important to understand how filters are currently tested and validated. Manufacturers use the industry standard ISO16889 multi-pass test to rate filter efficiency and dirt holding capacity of filter elements under ideal lab conditions.

Figure 1 depicts the test circuit where hydraulic fluid is circulated at a constant flow rate in a closed loop system with on-line particle counters before and after the test filter. Contaminated fluid is added to the system at a constant rate. Small amounts of fluid are removed before and after the filter for particle counting to calculate the filter efficiency (capture). The capture efficiency is expressed as the Filtration Ratio (Beta) which is the relationship between the number of particles greater than and equal to a specified size ( $X_{\mu_{[c]}}$ ) counted before and after the filter. In real world terms this test is the equivalent of testing a filter in an off-line kidney loop rather than replicating an actual hydraulic or lube system. It's basically a filter cart test.

Figure 1: ISO16889 Multi-Pass Test

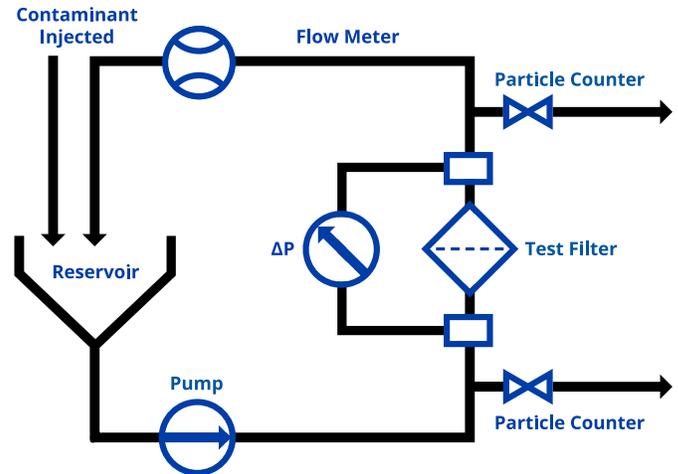

## Filtration Ratio (Beta) per ISO16889:

$$\beta_{X_{[c]}} = \frac{\text{quantity particles} \geq X_{\mu_{[c]}} \text{ upstream of filter}}{\text{quantity particles} \geq X_{\mu_{[c]}} \text{ downstream of filter}}$$

**Example:**  $\beta_{7_{[c]}} = 600/4 = 150$

**Filtration Ratio (Beta):**  $\beta_{7_{[c]}} = 150$

In the example, 600 particles greater than or equal to  $7\mu_{[c]}$  were counted upstream of the filter and 4 were counted downstream. This Filtration Ratio is expressed as "Beta  $7_{[c]} = 150$ ". The  $_{[c]}$  is referred to as "sub c". The sub c is used to differentiate between multi-pass tests run per the current ISO16889 multi-pass test with new particle counter calibration per ISO11171 from ISO4572. Filtration Ratio expressed or written without the "sub c" refers to the antiquated ISO4572 multi-pass test superseded by ISO16889. The efficiency may also be expressed as a percentage by converting the Filtration Ratio:

$$\text{Efficiency of } \beta_{X_{[c]}} = \frac{(\beta - 1)}{\beta} \times 100$$

**Example:** **Efficiency % of  $\beta_{7_{[c]}}=150 = (150-1)/150 \times 100$**

**Efficiency %:** **99.33%**

Using our Beta Ratio found in the first example, we can calculate that the test filter is 99.33% efficient at capturing particles  $7\mu_{[c]}$  and larger.

## The DFE Multi-Pass Testing Method

DFE multi-pass enhances the industry standard by inducing dynamic conditions (duty cycle) and measuring the effects of the duty cycle in real time instead of looking at normalized numbers over a time weighted average. DFE also quantifies retention efficiency in real time in order to identify a filter's ability to properly retain previously captured contaminant and the degree to which it unloads captured contaminant back into the system. For an easy comparison, think of it as a sneeze that releases a rush of contamination to levels that are well above the upper limit of fluid cleanliness then fades as the flow rate normalizes.

In the DFE test, flow rate is truly dynamic in that rapid changes can be made while maintaining full system flow through the test filter. The raw data is continuously collected and organized so filter efficiency can be reported for variable flow conditions including time weighted averages and isolated moments to reveal true filter performance during hydraulic stress conditions – exactly when you need the filter to perform at its best.

At the end of the initial test when the filter element is loaded with contaminant, it is subjected to a restart test in which the flow goes from zero to max flow in milliseconds, replicating a hydraulic or lube system restart. Through rapid particle counting with precise control, this dynamic flow change allows Donaldson Hy-Pro to analyze the amount of particles released and understand both the capture and retention efficiencies of each and every filter tested.

# DFE Filter Element Technology

## Quantifying Contaminant Capture and Retention

Filters for critical hydraulic, lube and fuel systems are specifically designed for high efficiency particle capture. However, a filter is not a black hole, capturing and retaining particles in a real-world dynamic environment is far more challenging. Donaldson Hy-Pro pioneered the DFE (Dynamic Filter Efficiency) multipass test to optimize performance under real-world conditions. This methodology drives the development of proprietary media layers, media support structure, and filter construction. The results are higher efficiency particle capture and retention and cleaner fluids when Donaldson Hy-Pro upgrade elements are in service.

Donaldson Hy-Pro uses DFE and the ISO/CD23369 Cyclic Flow Multi-Pass Test to benchmark performance between its filters and those of its competitors. The Cyclic Flow Multi-Pass protocol ISO/CD23369 moves the industry standard one step closer to real-world conditions by incorporating cyclic flow with rapid flow transitions (between 100-200 msec) as shown in Figure 2.

**Figure 2: ISO23369 Flow Cycle**

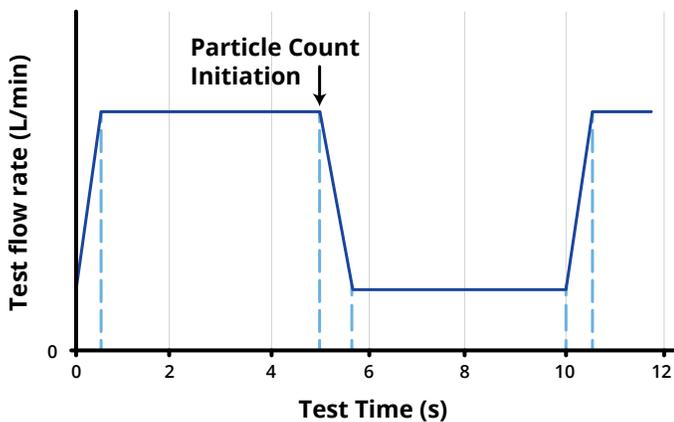


Table 1 illustrates this differentiation during dynamic conditions. Donaldson Hy-Pro filters and a competitor's filters (Filter X) of similar rating were tested using ISO16889 and ISO23369. The average Beta ratios are listed and plotted vs particle size in Figure 3. Under static ISO16889 (dashed lines) both filters easily exceeded a Beta ratio of  $B_{7_{[c]}} > 4000$  (Donaldson Hy-Pro filter averaged  $\beta_{6.2\mu m} = 2000$ , Filter X averaged a higher level of performance,  $\beta_{3\mu m} = 4000$ ). In beta ratios the lower the BX number the better the efficiency.


**Table 1: Test Conditions and Results**

ISO/CD23369 Test Conditions		
Flow Rates	114 lpm:28.5 lpm (30 gpm:7.5 gpm)	
ISO16889 Test Results		
	Donaldson Hy-Pro	Filter X
$\beta_{\geq 1000}$	6.2 $\mu m$	6.0 $\mu m$
ISO/CD23369 Test Results		
	Donaldson Hy-Pro	Filter X
$\beta_{\geq 1000}$	7.2 $\mu m$	10.6 $\mu m$
$\beta_{\geq 2000}$	8.1 $\mu m$	12.9 $\mu m$
$\beta_{\geq 4000}$	9.2 $\mu m$	17.7 $\mu m$

But that is where the similarity ends. The Donaldson Hy-Pro DFE rated filter element shifted from 6.2 $\mu m$  during static testing to 8.1 $\mu m$  during dynamic conditions – a shift of only 1.9 $\mu m$ . Filter X shifted from 6.0 $\mu m$  to 12.9 $\mu m$ , from static to dynamic conditions – a 6.9 $\mu m$  drop, 6 times greater efficiency loss at  $B_x \geq 2000$  than Donaldson Hy-Pro. And these differences dramatically increased at higher Beta ratios with Filter X falling to 17.7  $\mu m$  at  $\beta \geq 4000$ .

Donaldson Hy-Pro DFE rated filter elements are optimized to deliver and maintain the lowest real world, in-service ISO fluid cleanliness codes even in industry's toughest systems. This is what separates Donaldson Hy-Pro from the rest and how we improve your reliability, efficiency and keep your fluids cleaner and always in spec.


**Figure 3: ISO16889 & ISO23369 Avg Beta vs Particle Size**

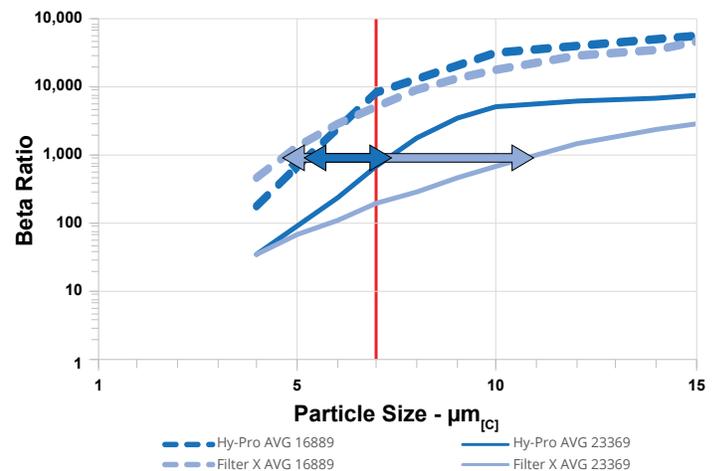

## DFE Multi-Pass: Cold Start Contamination Retention

Donaldson Hy-Pro utilizes DFE to bridge the gap between lab and real world filter performance for hydraulic, lube and fuel systems. The DFE restart test challenges a filter's ability to retain the contaminants it has captured in a worst-case scenario, once the filter is near the end of its life. Once the filter is heavily loaded the DFE test main flow and particle injection systems are stopped for a short dwell time, then full flow is restarted without injection to measure what comes out of the filter. After restart the DFE cycle is repeated several times all while the downstream particle counts are monitored in real time. The developmental value of the DFE test is the continuous, real time particle counts that occur concurrently every 5 seconds measuring actual retention efficiency during flow changes and restart (Figure 4). This is the advantage of DFE over ISO/CD23369 Cyclic Flow Multi-Pass test, where several high frequency flow changes are normalized over 30-60 second particle counts. ISO/CD23369 would miss the short-term particle events captured by the DFE test.


**Figure 4: ISO/CD23369 vs DFE Multi-Pass**

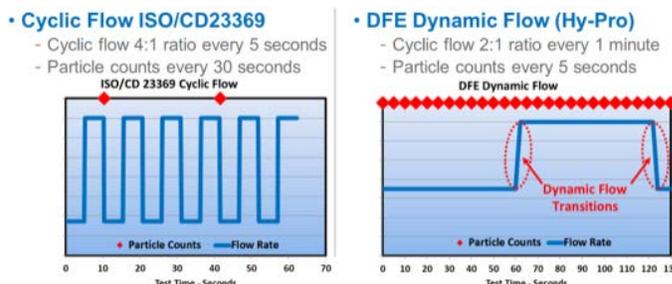

Restarts in hydraulic, lubrication and fuel systems are one of the toughest conditions for a filter and for this reason Donaldson Hy-Pro includes it in the DFE test. A filter that doesn't properly retain is a dangerous source of concentrated contamination in front of critical components and bearings. Figures 5 and 6 depict the particles released during restart for Filter X and Donaldson Hy-Pro. The DFE rated Donaldson Hy-Pro element has much higher retention efficiency than filters designed and validated only to ISO16889 multi-pass or ISO23369. In the real world this means that Donaldson Hy-Pro DFE rated elements provide lower ISO codes (consistently cleaner oil) and better protection of your critical equipment and uptime.


**Figure 5: Filter X DFE Restart Test**

Released 1810 particles/ml  $\geq 4\mu\text{m}_{[c]}$

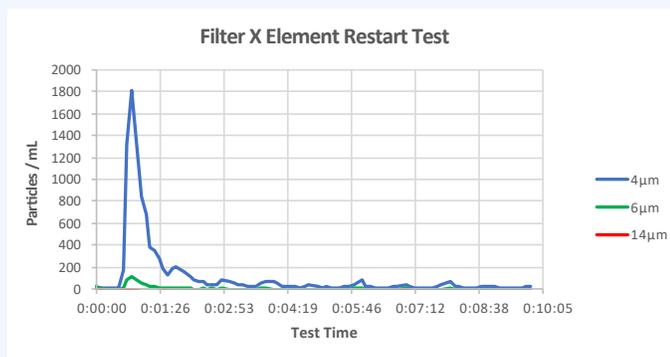

**Figure 6: Donaldson Hy-Pro DFE Restart Test**

Released 283 particles/ml  $\geq 4\mu\text{m}_{[c]}$

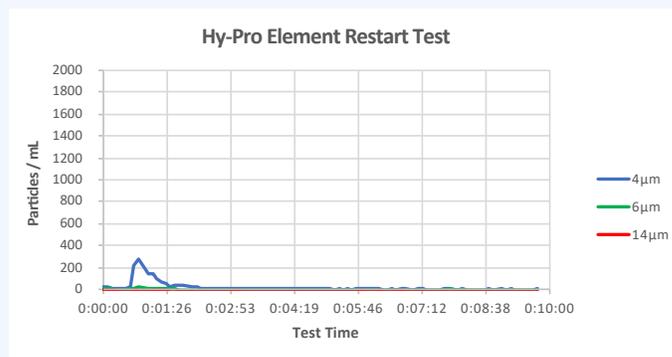

**Downstream Particle Counts / mL During Restart Test**

	$\geq 4\mu\text{m}_{[c]}$	$\geq 6\mu\text{m}_{[c]}$	$\geq 14\mu\text{m}_{[c]}$	ISO Code per ISO: 4406:2021	ADHC
Donaldson Hy-Pro Element	283	29	1.8	15/12/8	54.17g
Element X	1,810	117	1.2	18/14/7	53.27g

# Upgrading from Cellulose to Glass

## First, understand media efficiencies.

When a filter element is rated at a particular micron size, it is said to remove particles of that particular size and larger from the fluids it is filtering. However, filter elements of different media with the same micron rating can have substantially different filtration efficiency. Filter efficiency is calculated by taking the ratio of particles upstream of (before) the filter to particles downstream of (after) the filter. The higher the ratio, the more efficient the filter and the less particles it allows to pass. There are two distinct ratings of filter efficiency, classified as nominal and absolute.

## Nominal Efficiency

Nominal ratings refer to a degree of filtration at a particular micron by weight of solid particles. Filters rated as nominal (we're looking at you cellulose) have no maximum pore size, meaning while they may remove some 10 micron particles, they can still allow larger particles such as 200 micron to pass through and devastate components in the system.

## Absolute Efficiency

Absolute ratings, such as most glass media filter elements are classified under, derive their value from the largest size particle which can pass through the pores of the media. Along with much greater efficiencies, glass elements have superior fluid compatibility versus cellulose with hydraulic fluids, synthetics, solvents, and high water based fluids.

## Cellulose vs Glass Elements

Organic cellulose fibers can be unpredictable in size and effective useful life, while inorganic glass fibers are much more uniform in diameter and much smaller than cellulose fibers as seen in the images to the right (Figures 2 and 3).

The illustrated elements on the following page provide a visual representation of the efficiencies of both a cellulose and glass element at their respective efficiency ratings.

The cellulose element would typically achieve a code no better than 22/20/17. Runaway contamination levels at  $4\mu_{cl}$  and  $6\mu_{cl}$  are very common when cellulose media is applied in which a high population of fine particles exponentially generate more particles in a chain reaction of internally generated contaminants. The illustrated glass element would typically deliver an ISO Fluid Cleanliness Code of 18/15/8 to 15/13/9 or better depending upon the system conditions and ingress rate.

## Upgrading to Donaldson Hy-Pro G8 Dualglass


When upgrading to an absolute efficiency glass media element, the system cleanliness must be stabilized. During this clean-up period the glass element halts the runaway contamination as the ISO cleanliness codes are brought into the target cleanliness range. As the glass element removes years of accumulated fine particles, the element life might be temporarily short.

Once the system is clean the glass element can last up to 4~5 times longer than the cellulose element that was upgraded as shown in Figure 4.

## Figure 1: Filter Efficiency Equation


$$\beta_{X_{\mu_{cl}}} = \frac{\text{quantity particles } \geq X_{\mu_{cl}} \text{ upstream of filter}}{\text{quantity particles } \geq X_{\mu_{cl}} \text{ downstream of filter}}$$

## Figure 2: Cellulose Filter Media

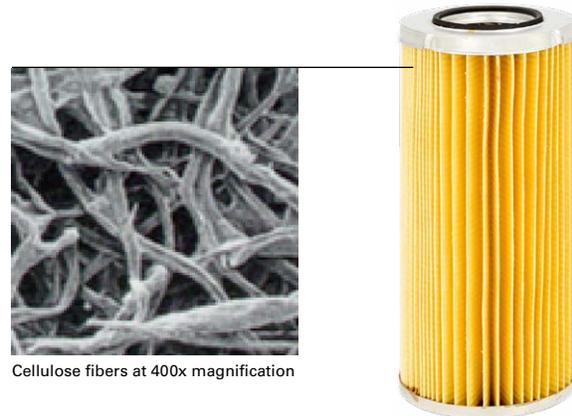


Cellulose fibers at 400x magnification

## Figure 3: Glass Filter Media

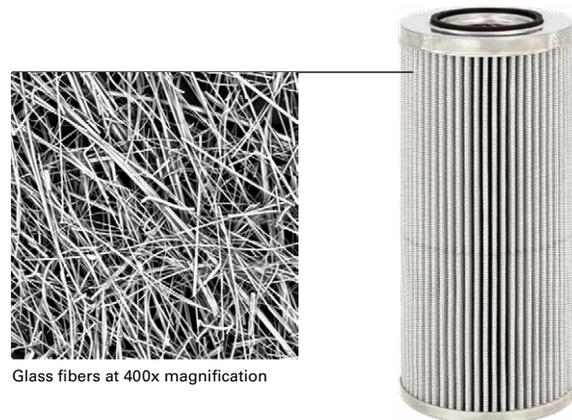

Glass fibers at 400x magnification

## Figure 4: Element Lifespan

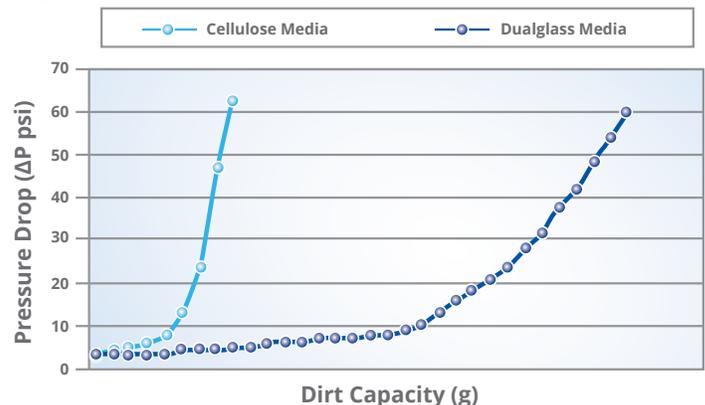

# Cellulose: $\beta_{10\mu_{[C]}} = 2$

## Dirt in

50,000 particles  $10\mu_{[C]}$  or larger

$$= \frac{50,000 \text{ Particles In}}{25,000 \text{ Particles Out}}$$

## Dirt out

25,000 particles  $10\mu_{[C]}$  or larger



**50%**  
efficiency

# Glass: $\beta_{10\mu_{[C]}} = 4000$


## Dirt in

50,000 particles  $10\mu_{[C]}$  or larger

$$= \frac{50,000 \text{ Particles In}}{12.5 \text{ Particles Out}}$$

## Dirt out

12.5 particles  $10\mu_{[C]}$  or larger

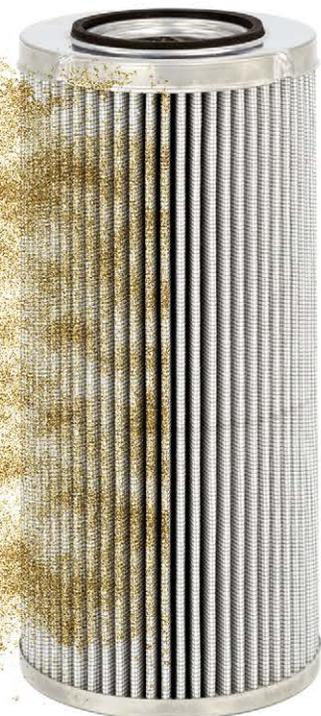

**99.97%**  
efficiency

# Lube Design

## Low $\Delta P$ Optimized Glass Filter Media

A modified DFE rated glass media option for high flow lube systems with low  $\Delta P$  alarm (1 bard, ~15 psid). Also ideal for undersized hydraulic filter assemblies or upgrading from wire mesh to high efficiency glass media.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



### Lube Applications

High speed bearing lube oil systems in paper mills typically use higher viscosity ISO220 and ISO320 oils. A high clean element  $\Delta P$  (i.e. 0.5 bard / 7psid) relative to a low  $\Delta P$  indicator alarm setting (i.e. 1.25 bard / 18 psid) leads to reduced filter element loading and short element life. This type of condition can occur when changing to heavier oil or upgrading filter element efficiency in search of lower operating ISO Codes. Donaldson Donaldson Hy-Pro H and L media codes are designed specifically to optimize element life while maintaining filter efficiencies in these types of applications.

### The perfect media for your application.

Donaldson Hy-Pro DFE Rated \*M media code is the Donaldson Hy-Pro standard and is ideal for 99.99% of all hydraulic, lube and diesel applications. Contact Donaldson Hy-Pro for selection and part numbers for H and L low  $\Delta P$  modified media options.

Original

HC8314FCP39H

Donaldson Hy-Pro  
Glass Media

HP8314L39-3MB

Donaldson Hy-Pro  
Lube Media

HP8314L39-3LB




# Dynafuzz

## Stainless Fiber Media

Filter Elements for Power Generation and other fire resistant fluid applications.

Dynafuzz is ideal for long term exposure to aggressive fluids such as phosphate ester, Skydrol, Deionized water, and high temperature applications where traditional glass media binders can degrade leading to media migration.

**Donaldson**  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)

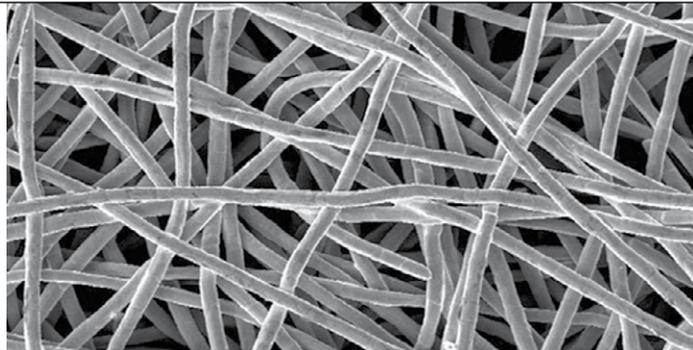

### Advanced media solutions.

EHC systems using phosphate ester fluids (FRFs) develop aggressive acids when exposed to water. The acid attacks glass fiber media binders of critical pump discharge and last chance servo pilot filters. Lower filter efficiency, media migration and fiber shedding into the servo screens can result causing servo valve malfunction. Dynafuzz media is DFE rated to provide the same low operating ISO Codes and contaminant retention you expect with the fluid compatibility you need.

### Dynafuzz options:

Dynafuzz media is available for all Donaldson Hy-Pro high collapse filter elements that are found in turbine EHC, primary metal, and other hydraulic control applications where fire resistant fluids are used. For the most critical installations (nuclear power), optional 100% bubble point integrity testing and validation is available. Part number modifier example, contact Donaldson Hy-Pro for specifications and pricing:

Original	Donaldson Hy-Pro Glass Media	Donaldson Hy-Pro Dynafuzz Media
HC9401FDP13ZYGE	HP41L13-2MV	HP41L13-3SFV

### Intuitive Upgrade

The PFQ290218V Westinghouse EHC upgrade features a 3SF Dynafuzz media element ( $\beta_{5_{cl}} > 4000$ ) in place of a 10 micron glass media element. The bowl extension with top loading element service minimizes mess and accepts a double length element allowing the use of higher efficiency media and extended element life.



# NSD

## Non-Spark Discharge Filter Elements

Donaldson Hy-Pro NSD element and media technology is optimized to prevent spark discharge and minimize potential energy in bearing lubrication and hydraulic control systems.

NSD elements prevent oil degradation caused by thermal events associated with element spark discharge to extend fluid life and prevent anti-oxidant additive depletion.

**Donaldson**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)




### Cleaner fluid without sparking.

For some, the answer to preventing element sparking and high potential energy is to use coarse strainer type filters (Stat-Free) in the main bearing lube filter duplex. Although this may prevent sparking it renders the main bearing lube filter assembly useless in preventing catastrophic bearing failure due to contamination. Independent lab analysis proves that even Donaldson Hy-Pro high efficiency 3 micron absolute ( $\beta_{5_{\mu c}} > 4000$ ) NSD elements are resistant to spark discharge.

### Prevent varnish; promote efficiency.

With Donaldson Hy-Pro NSD elements, any reduction in thermal sparking events and tribo-electric effect will have a positive impact by decelerating anti-oxidant additive depletion and extending useful fluid life. Field test data has shown that Donaldson Hy-Pro NSD elements may even reduce or stabilize varnish potential values by preventing further degradation from sparking and collecting some insoluble oxidation by-products.

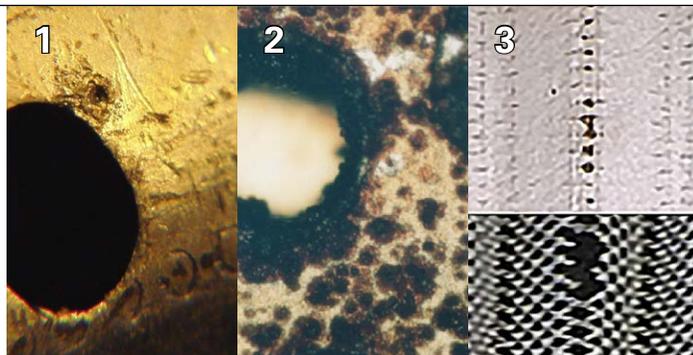

### Eliminate damage caused by sparking.

As fluid passes through the typical tortuous filter media fiber matrix, turbulence increases which results in thermal events as the fluid layers shear, creating static accumulation on elements that can lead to high voltage spark discharge from media to support tube. Photos 1 and 2 show evidence of sparking on the filter element support tube (pitting and burning), and photo 3 shows filter media and support mesh from a lube filter element with spark discharge burn damage.

# Water Removal

## G8 Dualglass Media with Water Removal

Media code "A" specifies G8 Dualglass media co-pleated with water removal scrim to produce a filter that can remove water while maintaining  $\beta_{x_{[c]}} \geq 4000$  efficiency down to  $3\mu_{[c]}$ . Available for all Spin-On and cartridge style filter elements.

**Donaldson**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)




### Dual purpose contamination removal

Donaldson Donaldson Hy-Pro filter elements with water removal media combine the best of particulate and water removal and can bring high water counts down and prevent any of the gel particles from being released back into the system, all while maintaining our  $\beta_{x_{[c]}} \geq 4000$  particulate removal efficiency you've already come to love. Water removal is available with any of our glass media selections from  $1\mu$  to  $40\mu$ .

### Remove water: protect your system.

Emulsified water, very small droplets of water dispersed through oil, will often cause oil to appear cloudy or milky along with increasing its viscosity. Donaldson Donaldson Hy-Pro Water Removal filter elements pull free and emulsified water from your industrial oils to leave them clean and dry and ensure your system is operating to its peak efficiency.

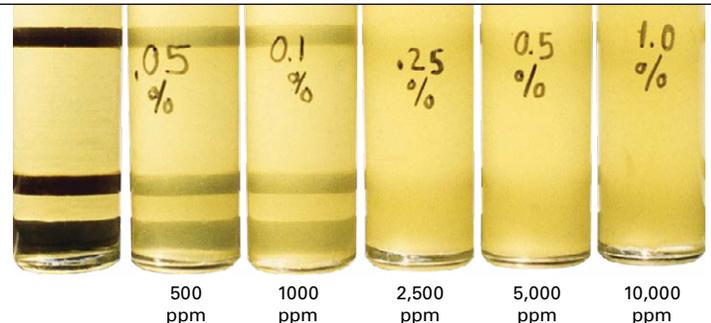

### Donaldson Hy-Pro Element

### Water Capacity

HP75L8-*AB	24 oz 0.7 liters
HP107L36-*AB	177 oz 5.2 liters
HP8314L39-*AB	182 oz 5.4 liters
HP60L8-*AB	12 oz 0.4 liters

### Water Capacity by Series

#### Water PPM ~ Ounce Conversion

Moisture (PPM) x Fluid Volume (Gal)  
x 0.0001279 = oz of Water

Example:

2,500 ppm x 5,000 gal reservoir x 0.0001279 = 1598.75 oz water

# Turbo-TOC\* Upgrades

## Donaldson Hy-Pro Filter Element Upgrades for Kaydon Turbo-TOC\* Conditioning Skid Element Sets

Complete filter element sets including pre-filter, coalesce, separator and post-filter polishing elements.



[hyprofiltration.com/](http://hyprofiltration.com/)



\*Turbo-TOC is a registered trademark of Kaydon Corporation.



### Elements that go beyond industry standard.

DFE rated elements perform true to rating even under demanding variable flow and vibration conditions. Today's industrial and mobile hydraulic circuits require elements that deliver specified cleanliness under all circumstances. Wire mesh supports the media to ensure against cyclical flow fatigue, temperature, and chemical resistance failures possible in filters with synthetic support mesh.

### Water Phase 1: Coalesce.

Stage 1 in removing the free and emulsified water is to coalesce the water into larger droplets until large enough to drop out of the oil. The Donaldson Hy-Pro HPQK2G coalesce utilizes all synthetic media and non-woven materials providing great compatibility even over long term exposure to water.



### Water Phase 2: Separator + Final Polishing.

The HPQK3P-3M upgrade is a dual functioning element providing the final stage of water separation with a final pass of particulate removal. The TEFLON® coated screen works with the coalesce element to act as a water barrier while the water droplets grow before being collected. The final conditioning is Donaldson Hy-Pro 3M media rated  $\beta_{3, [c]} > 4000$ , it's a total solution.

# Element Interchange & Upgrade

Kaydon Model No.	Kaydon Part No.	Donaldson Hy-Pro Direct Interchange	Description	Donaldson Hy-Pro Upgrade	Description
K1000	A910201	HP102L36-6MB	Glass media pre-filter $\beta_{7(c)} > 4000$	HP101L36-3MB	High capacity glass media pre-filter $\beta_{5(c)} > 4000$
K1100 (replaced K1000)	A910201, A910266	HP101L36-6MB	High capacity glass media pre-filter $\beta_{7(c)} > 4000$	HP101L36-3MB	High capacity glass media pre-filter $\beta_{5(c)} > 4000$
K2000	A910202	HPQK2	Coalesce element cellulose media	HPQK2G	Coalesce element synthetic media
K2100 (replaced K2000)	A910202, A920267	HPQK2G	Coalesce element synthetic media	-	-
K3000	A910203, A910303	HPQK3	Separator element cellulose media	HPQK3P-3M	Separator layer + $\beta_{5(c)} > 4000$ glass media polishing
K3100 (replaced K3000)	A910203, A910268	HPQK3P-3M	Separator layer + $\beta_{5(c)} > 4000$ glass media polishing	-	-
K4000	A910204	HP102L36-3MB	High capacity glass media post-filter $\beta_{5(c)} > 4000$	HP101L36-3MB	High capacity glass media post-filter $\beta_{5(c)} > 4000$
K4100 (replaced K4000)	A910204, A910269	HP101L36-3MB	High capacity glass media post-filter $\beta_{5(c)} > 4000$	HP101L36-1MB	High capacity glass media post-filter $\beta_{3(c)} > 4000$

## Optimize Your Turbo-TOC\* performance with Donaldson Hy-Pro Elements

Achieve lowest turbine lube oil reservoir ISO fluid cleanliness results and maximize element life by upgrading to Donaldson Hy-Pro HP101L36-3MB series for pre-filter and HP101L36-1MB post-filter.

For optimum water removal efficiency and fluid compatibility use HPQK2G coalesce element and HPQK3P-3M separator/polisher elements (all synthetic media, non-cellulosic).

To reduce element change out costs on skids with pre-filter and post-filter housings install HP101L36-3MB in pre-filter with HPQK2G coalesce and HPQK3P-3M separator / polisher elements in the coalesce vessel (extends coalesce element life).

Upgrade to HPQK2G and HPQK3P-3M synthetic media elements and achieve > 95% single pass water removal efficiency.

## Tested to ISO Quality Standards


- ISO 2941 Collapse and burst resistance
- ISO 2942 Fabrication and Integrity test
- ISO 2943 Material compatibility with fluids
- ISO 3724 Flow fatigue characteristics
- ISO 3968 Pressure drop vs. flow rate
- ISO 16889 Multi-pass performance testing

## Fluid Compatibility

Petroleum based fluids, water glycols, polyol esters, phosphate esters, HWBF. Contact Donaldson Hy-Pro for seal selection assistance.

## Media

G8 media pleat pack features our latest generation of graded density glass media that delivers required cleanliness while optimizing dirt capacity.

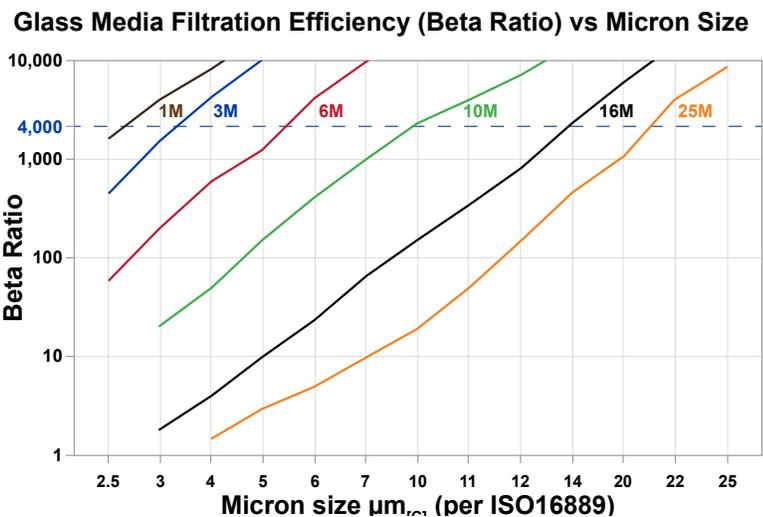

\*Turbo-TOC is a trademark of Kaydon Corporation.

# Off-line Filtration

## Types, Uses & Contamination Prevention

Our mission is to make our customers as efficient as possible, and we achieve that with the highest quality filtration products and total system cleanliness strategies to maximize uptime, productivity and prevent costly fluid contamination related failures. We often achieve that by simply upgrading our customers to Donaldson Hy-Pro DFE rated filter elements and Hy-Dry breathers. But too many systems have insufficient filtration, or worse yet no filtration, creating the need for a range of off-line particulate filtration solutions.

An Off-line system (aka kidney loop) is connected to the reservoir of a hydraulic, lube or storage system that operates independently of the operation of that system meaning that it can be stopped for an element change without interrupting operations. It allows the flexibility to use ultra-high efficiency media to remove particulate and insolubles to reach low ISO Codes that might otherwise be unattainable. Conditioning off-line extends the life of critical on-board pump discharge, servo pilot and return line filters that can only be changed when the system is not running. Maintaining cleanliness in the reservoir protects critical pump inlet, eliminating the need for suction strainers that can cause pump cavitation.

### Dedicated



A properly sized off-line filtration system can turn over the entire volume of a reservoir several times a day (we recommend 8 turns), maintaining ISO fluid cleanliness codes well below the upper limit. Whether you're using low viscosity hydraulic or high viscosity lube oil, implementing dedicated off-line filtration will yield longer bearing and hydraulic component life and longer useful fluid life. When dealing with high viscosity gearbox and rolling mill lubricants, it's most effective to filter off-line so that the flow rate and filter can be sized for optimal pressure drop and element life without sacrificing efficiency. That means you can pump thick fluid through an oversized filter at a low flow rate and get it super clean, even when it's cold outside. And when the filter element has removed kilograms of dirt you don't have to stop your operation to change it; just turn off the kidney loop, change elements, and get right back to filtering your fluids. With a dedicated system, you know that your fluids are always clean and your system is always protected.

### Mobile



Portable filtration systems are a valuable tool in the battle against contamination and are ideal for fluid transfer and in field service work. The Donaldson Hy-Pro range of portable filtration systems includes compact units for small gearboxes, filter carts optimized for hydraulic applications and units with generously sized filters for high viscosity or highly contaminated fluids commonly found in fluid reclamation. Staged filtration, two filters in series, allows for combined water removal and particulate filtration in one pass to get you on to the next job more quickly. Donaldson Hy-Pro mobile filtration systems are designed for industrial, outdoor use with high quality components including cast iron gear pumps and non-shredding wheels that get your filtration exactly where you need it.

### Integrated versatility

Implementing off-line filtration is the best way to ensure your hydraulic and lube oils are clean and your systems are operating efficiently. Whereas applications that consume fluids (diesel, etc) must filter fluids in a single pass, off-line filter systems for hydraulic and lube oils allow for recirculating the reservoir to remove more dirt with every pass. A dedicated off-line system has the added benefit of being used as a 3-way valve to top off the reservoir, turning your filter system into a fluid transfer solution that removes any dirt from oil that is added and prevents contamination from ever entering your system.

# Off-line Systems

## More than just filtration.

With a Donaldson Hy-Pro dedicated filtration system, fluid contamination related failures and premature fluid replacement are a thing of the past. Every off-line solution includes sample ports before and after filters, providing accurate reservoir condition and filter performance validation. Some great options include on-board particle monitors, cooling for hot gearboxes, ultra high viscosity, dragline-optimized skids, automatic isolation valves, hazardous environment, custom enclosures and more. As with all Donaldson Hy-Pro systems, your off-line system can be completely customized to provide the best solution for your application.

<b>COF</b> Compact Offline Filter		<b>42</b> Our smallest unit yet, it's able to fit where no other filtration equipment can. Ideal for smaller systems, or where a larger offline system wouldn't fit, can be permanently installed or portable.
<b>CFU</b> Compact Filter Unit		<b>46</b> A compact, hand portable solution ideal for fluid transfer and conditioning small gearboxes and hydraulic reservoirs. Available in several filter configurations MF90 staged filtration or single large spin-on for high viscosity.
<b>FPL</b> Filter Panel		<b>50</b> A dedicated wall or stand mount filter panel ideal for hydraulic reservoirs, dispensing fluids from storage, and diesel conditioning. Features two filters in series and a range of elements including high efficiency and water removal.
<b>FC</b> Filter Cart		<b>54</b> Portable filter cart complete with hoses and wands, the FC is narrow and well balanced for taking filtration wherever you need it. Perfect for conditioning multiple hydraulic systems (injection molding) and fluid transfer (top-off).
<b>FSL</b> High Viscosity/ High Flow Filtration Systems		<b>58</b> A dedicated off-line system with large filters suited for high viscosity gearbox fluids or heavily contaminated fuels. Top loading filter housings minimize mess during element service and the HP107 coreless element with integral zero-leak bypass provides a new bypass with each element change.
<b>FSLD</b> Dual High Viscosity/ High Flow Filtration Systems		<b>62</b> The FSLD offers all the features of the FSL with two filters in series, parallel or duplex to deliver lower ISO Codes and cleaner fluids. With multiple valve options, FSLD systems can be run in parallel, series or in isolation functioning as a duplex arrangement.
<b>FSW</b> Wall Mounted Filtration Systems		<b>66</b> The latest addition to the fleet of Donaldson Hy-Pro solutions, FSW, is our most flexible side loop contamination solution. Flow rate, element size and media selections scalable for any application from high flow fuel, plastic injection molding varnish control, phosphate ester acid remediation, wind turbine gearbox filtration, and much more.
<b>FCL</b> High Viscosity/High Flow Filter Carts		<b>70</b> FCL features an oversized filter element so you can clean the dirtiest gear lubricants, reclaimed fluids and contaminated oils with high efficiency filter media. Top loading filter housings minimize mess during element service and the HP107 coreless element with integral zero-leak bypass provides a new bypass with each element change.
<b>HS</b> Heated Filtration Systems		<b>74</b> Combining the high efficiency filtration of the FSL with a specialized heating design, the HS is perfect for cold weather operations or for getting systems up to temperature during cold starts. Programmable temperature control and low watt density jacketed heaters maintain temperature and protect the oil from direct contact with heating elements.

# COF

## Compact Offline Filter

Our smallest unit yet, the Compact Offline Filter is able to fit where no other filtration equipment can. Ideal for smaller systems, or where a larger offline system wouldn't fit, can be permanently installed or portable.

Typical applications include gear boxes, plastic injection molding machines, and vacuum pumps, to name a few. Choose between a variety of motors, wands, hoses, and portable cart options. Paired with our unique VTM elements, this unit can remove particulate, water, and varnish all with one filter.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Small size, huge results.

The vertical design allows the installation of equipment with limited space compared to filter panels or other offline filtration equipment. At only 8.5" depth, 8" wide, and 27.75" tall, the COF can be installed on almost any piece of industrial or mobile equipment.



45

## High viscosity performance.

The custom-designed gerotor pump was specifically designed to allow for a higher viscosity range than competing units. The COF can pump up to a 2,200 cSt fluid, equivalent to an ISO 460 oil at room temperature. This increasing the range of applications that are suitable without adding bulky heater options.



## Wide range of media options.

Choose between a variety of media options from our G8 dualglass (M), G8 dualglass + water-absorbing (A), or VTM media. VTM710 media is the ideal filter media choice to pair with the COF to remove particulate, water, and varnish. Our G8 dualglass media is another excellent option. Rated at an industry-leading Beta 4000 value, G8 dualglass media was developed using our proprietary Dynamic Filter Efficiency (DFE) test standard. Rest assured, our filter medias deliver cleanliness in the real world, whichever option you choose.




## Easy filter element servicing.

Only 1.5" of clearance is required for element servicing since the bowl and filter are removed as a single piece. The element snaps into the bowl and is automatically seated to the pump as the bowl is installed. A bowl drain comes standard as well as a hex nut for easy removal and installation. The required torque is listed on the bowl for easy reference during servicing.



## Reverse flow element with integrated bypass.

The HP482 filter elements used in the COF utilize a reverse flow element with a bypass valve integrated into the closed end cap. The raised bypass design keeps dirt in the bottom end cap during bypass and element servicing. Every time an element is changed, a new bypass is installed eliminating bypass valve fatigue and leakage over time.

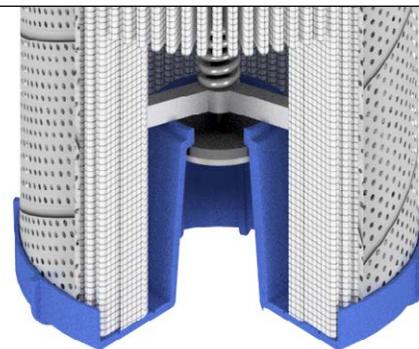

## Dedicated to reliability.

Don't let dirty oil get you down. Clean oil is essential to the long-term reliability of all equipment. At Donaldson Hy-Pro we are dedicated to the removal of all forms of oil contamination from dirt to water and even varnish and sludge removal. Extend the life of your oils as well as high pressure, return, and pilot filter elements with an easy to service, compact off-line filter.




# COF Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 8.5" (22 cm) Without frame 58" (147 cm) With frame	<b>Length</b> 27.75" (70 cm) 24" (61 cm)	<b>Width</b> 8" (20 cm) 21" (53 cm)	<b>Approximate Weight</b> 35 lbs (16 kg) 112 lbs (51 kg)		
<b>Connections</b>	<b>Inlet</b> ¾" female SAE-ORB	<b>Outlet</b> ½" female SAE-ORB	<b>Hoses</b> ¾" x 8 ft (2.4 m) suction female JIC or BSPP swivel ½" x 8 ft (2.4 m) discharge female JIC or BSPP swivel			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)			
<b>ΔP Indicator Trigger</b>	35 psi (2.4 bar).					
<b>Filter Assembly Bypass</b>	50 psid (3.4 bard).					
<b>Materials of Construction</b>	<b>Motor</b> Steel cover	<b>Pump</b> Aluminum body	<b>Filter Assembly</b> Aluminum bowl	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless steel	<b>Element End Caps</b> Nylon glass filled
<b>Power Options</b> Contact factory for options not listed	1/2 HP, 1P, 110V-115VAC 50/60Hz, with on/off switch, 6 foot cord, and NEMA 5-15 plug 1/2 HP, 1P, 208-230VAC 50/60Hz 1/2 HP, 3P 460 V ac, 60Hz 1/2 HP, 3P 380 V ac, 50Hz 1/2 HP, 24 V dc, 20 A, Electric Motor					
<b>Pump</b>	Custom designed positive displacement gerotor pump with internal relief valve.					
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[c]}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{[c]}} \geq 4000$	<b>VTM</b> $\beta_{0.9_{[c]}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media			
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>					
	<b>Model</b> COF15	<b>Filter Element Part Number</b> HP482RNL11 – [Media Selection Code] [Seal Code]		<b>Example</b> HP482RNL11-3MB		
<b>Viscosity</b>	1-2200 cSt Maximum viscosity based on dedicated COF installations with positive inlet flooded suction. Contact factory for portable COF maximum recommended viscosity with hoses and wands.					
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.					

<sup>1</sup>Dimensions and weights are approximations taken from base model and will vary according to options chosen.

# COF Part Number Builder

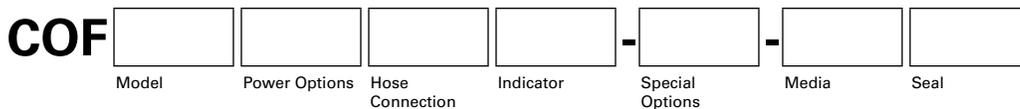

<b>Model</b>	<b>Filter Rate</b> 15    1.5 gpm (5.7 lpm)	<b>Filter Elements</b> HP482RNL11-***
--------------	---	--

<b>Power Options</b> Contact factory for options not listed	<b>11</b>	1/2 HP, Single Phase, 115 V Ac, 50 Hz, Electric Motor With ON/OFF Switch, 6 Foot Cord, And No Plug
	<b>12</b>	1/2 HP, 1P, 115 V ac, 60Hz, with on/off switch, 6 foot cord, and NEMA 5-15 plug
	<b>21</b>	1/2 HP, Single Phase, 208-230 V Ac, 50 Hz, Electric Motor With ON/OFF Switch, 6 Foot Cord, And No Plug
	<b>22</b>	1/2 HP, Single Phase, 208-230 V Ac, 60 Hz, Electric Motor With ON/OFF Switch, 6 Foot Cord, And No Plug
	<b>23</b>	1/2 HP, 3 Phase 208-230 V Ac, 60 Hz, Electric Motor
	<b>24</b>	1/2 HP, 24 V dc, 20 A, Electric Motor
	<b>40</b>	1/2 HP, 3 Phase 380-400 V Ac, 50 Hz, Electric Motor
<b>46</b>	1/2 HP, 3P 208-230/460 V ac, 60Hz	

<b>Hose Connection</b>	<b>G</b>	8 foot hoses, female BSP swivel hose ends
	<b>S</b>	8 foot hoses, female JIC swivel hose ends
	<b>X</b>	No hoses

<b>ΔP Indicator</b>	<b>Indicator Options</b>		<b>Thermal Lockout</b>	<b>Surge Control</b>	<b>Reset</b>
	<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
	<b>S</b>	Visual / Electrical (DIN 43650)	Yes	Yes	Manual
	<b>T</b>	Visual / Electrical (DIN 43650)	Yes	No	Manual
	<b>V</b>	Visual	No	No	Auto
	<b>X</b>	No indicator (port plugged)	-	-	-
	<b>Y</b>	Visual	Yes	Yes	Manual

<b>Special Options</b>	<b>C<sup>1</sup></b>	CE marked for machinery directive 2006/42/EC
	<b>F</b>	Portable cart frame
	<b>U<sup>2</sup></b>	CUL and/or CSA marked starter enclosure for Canada
	<b>W</b>	Stainless Steel wands

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>VTM</b> <b>VTM710</b> β <sub>0.9</sub> (C) = 4000 particulate, insoluble oxidation by-product and water removal media
	<b>1M</b>	β <sub>3</sub> (C) ≥ 4000	<b>3A</b>	β <sub>4</sub> (C) ≥ 4000	
	<b>3M</b>	β <sub>4</sub> (C) ≥ 4000	<b>6A</b>	β <sub>6</sub> (C) ≥ 4000	
	<b>6M</b>	β <sub>6</sub> (C) ≥ 4000	<b>10A</b>	β <sub>11</sub> (C) ≥ 4000	
	<b>10M</b>	β <sub>11</sub> (C) ≥ 4000	<b>16A</b>	β <sub>16</sub> (C) ≥ 4000	
	<b>16M</b>	β <sub>16</sub> (C) ≥ 4000	<b>25A</b>	β <sub>22</sub> (C) ≥ 4000	
	<b>25M</b>	β <sub>22</sub> (C) ≥ 4000			

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>"C" special option not available with "24" power option

<sup>2</sup>"U" special option not available with "11, 21, or 24" power option

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# CFU

## Compact Filter Unit

Bigger isn't always better. The Compact Filter Unit provides you with the best filtration at a size you can take anywhere. Tried and true, the CFU is the ultimate filtration system in power and mobility. And with easy to change cartridge style MF90s, you can rest easy knowing your filtration will always exceed your expectations.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Small size, huge results.

Designed specifically for limited space operations, the CFU maximizes power in a minimal package. Use the ergonomic handle to hoist the CFU to provide filtration directly within turbine nacelles or filter straight from the barrel to take out contaminants before they can ever reach your equipment.



## The first stage of success.

Staged filtration allows a range of media selections for particulate and water removal to deliver ISO Codes right on target. Choose from six element configurations to get the perfect CFU for your toughest contamination problems.



## Media matters.

DFE rated filter elements stay true to efficiency ratings and ensure the highest level of particulate capture and retention capabilities. And with media options down to  $\beta_{3(c)} \geq 4000$  you can be sure contamination stays exactly where you want it: out of your fluid.



## Redefines standard filtration.

Knowledge of your system is the ultimate tool in the fight against contamination. With upstream and downstream sample ports located on every machine, the standard CFUs are anything but standard.



## Different by design.

Built from lightweight aluminum and engineered for portability, the CFU is perfectly designed to filter new fluids during transfer and top-off bulk oil before use. For fluids already in service, use the CFU to flush them through the high efficiency elements for unparalleled levels of fluid cleanliness.



## Completely customizable.

Every CFU can be specifically tailored to the job at hand so you get the perfect solution to suit your needs. With a variety of flow rates and power options, even the ability to color coordinate each CFU to your existing safety standards, the possibilities are endless for what you can do with the CFU.



# CFU Specifications

Dimensions <sup>1</sup>	<b>Height</b> 21" (54 cm)	<b>Length</b> 21" (54 cm)	<b>Width</b> 12" (31 cm)	<b>Approximate Weight</b> 47 lbs (21 kg)	
Connections	<b>Inlet</b> ¾" male JIC with 37° flare	<b>Outlet</b> ½" male JIC with 37° flare	<b>Hoses</b> ¾" x 8 ft (2.4 m) suction female JIC or BSPP swivel ½" x 8 ft (2.4 m) discharge female JIC or BSPP swivel		
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)		
ΔP Indicator Trigger	22 psi (1.5 bar). Consult factory for other options.				
Filter Assembly Bypass	25 psid (1.7 bard). Consult factory for other options.				
Materials of Construction	<b>Frame</b> Powder coated aluminum	<b>Filter Assembly</b> Aluminum head	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless steel	<b>Element Bypass Valve</b> Nylon
Electric Motor	TEFC, 56C frame 0.5 - 7.5 HP, 900 - 1750 RPM				
Electric Connection	15' (4.6 m) cord included installed on machine. <sup>2</sup>				
Pump	Positive displacement gear pump with relief valve. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.				
Pneumatic Option Air Consumption	~15 cfm @ 60 psi <sup>3</sup>				
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$ ( $\beta_x \geq 2$ )		
Replacement Elements	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>				
	<b>Model</b>	<b>Filter Element Part Number</b>	<b>Example</b>		
	CFUD	HP75L8 – [Media Selection Code] [Seal Code]	HP75L8–12MB		
	CFUM9	HP90L9 – [Media Selection Code] [Seal Code]	HP90NL9–16MB		
	CFUM2	HP110L11 – [Media Selection Code] [Seal Code]	HP110NL11–6AV		
Viscosity	Max viscosity rated for 200 cSt. <sup>4</sup>				
Fluid Compatibility	Petroleum and mineral based fluids (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.				
Hazardous Environment Options	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord will be included.				


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Selecting pneumatic power option removes electric cord.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 200 cSt for sizing requirements.

# CFU Part Number Builder

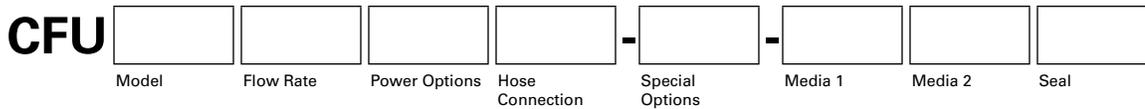

Model	Filter Assemblies	Filter Elements
	<b>D<sup>1</sup></b> 1 x S75D Spin-On filter assembly	2 x HP75L8-*** filter elements in parallel flow
	<b>M2<sup>1</sup></b> 1 x MF110 cartridge housing	1 x HP110NL11-*** filter element
	<b>M9</b> 2 x MF90 cartridge housings	2 x HP90NL9-*** filter elements in series flow

Flow Rate <sup>2</sup>		
<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

Power Options	Electrical - Dual Rated	Explosion Proof	Pneumatic
Contact factory for options not listed	<b>11</b> 110V, 1 P, 50Hz	<b>X11</b> 110 V ac, 1P , 50Hz	<b>00</b> Pneumatically driven air motor & PD pump. FRI & flow meter included.
	<b>12</b> 120V, 1 P, 60Hz	<b>X12</b> 120 V ac, 1P , 60Hz	
	<b>21</b> 220V, 1 P, 50Hz	<b>X21</b> 220 V ac, 1P , 50Hz	
	<b>22</b> 208-230V, 1 P, 60Hz	<b>X22</b> 208-230 V ac, 1P , 60Hz	

Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use

Hose Connection	
<b>G</b>	Female BSPP swivel hose ends, no wands
<b>S</b>	Female JIC swivel hose ends, no wands
<b>W</b>	Female JIC swivel hose ends, with wands

Special Options		
<b>B</b>	Complete filter bypass line	<b>M</b> Total system flow meter (120 cSt max)
<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>P9<sup>3</sup></b> Phosphate ester fluid compatibility modification
<b>G</b>	Spill Retention Pan - Industrial Coated Steel	<b>S9<sup>4</sup></b> Skydrol fluid compatibility modification
<b>J</b>	Add pressure gauge between pump & filter assembly	<b>Z</b> On site start-up training

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25 $\mu$ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40 $\mu$ nominal
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>10A</b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74 $\mu$ nominal
<b>10M</b>	$\beta_{11(c)} \geq 4000$	<b>25A</b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149 $\mu$ nominal
<b>16M</b>	$\beta_{16(c)} \geq 4000$		
<b>25M</b>	$\beta_{22(c)} \geq 4000$		

Seals	
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS<sup>5</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>When selected, omit Media 2 option from part number builder.

<sup>2</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>3</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>4</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>5</sup>Only available in 3M media for HP75L8 series elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.



# FPL

## Dedicated Off-line Filter Panel

A dedicated contamination solution for bulk oil handling, fluid transfer and reservoir or gearbox conditioning.

Enhance cleanliness by adding the FPL to an existing hydraulic system and extend the life of in-line filters.

## Ready when you are.

From the pump to the seals, every FPL arrives fully assembled and ready for installation so you can get straight to cleaning your fluids and improving the efficiency of your equipment.



## The first stage of success.

Staged filtration allows a range of media selections for particulate and water removal to deliver ISO Codes right on target. Choose between dual MF110 cartridge or up to four Spin-On elements to tackle the most viscous fluids and achieve unimaginably low ISO Codes in a single pass.



## Media matters.

DFE rated filter elements stay true to efficiency ratings and ensure the highest level of particulate capture and retention capabilities. And with media options down to  $\beta_{3,C1} \geq 4000$ , you can be sure contamination stays exactly where you want it: out of your system.



## Setting the new standard.

Sample ports in the right locations arm you with access to consistently accurate system conditions which is why every FPL comes standard with upstream and downstream sample ports in their proper positions.

## Engineered for industrial use.

Precision engineered and built from heavy gauge steel, the FPL is designed to be a powerhouse addition to your equipment. To top it off, the cast iron gear pump with internal relief gives you the durability you want with the safety you need.



## From concept to creation.

Whether for plastic injection molding hydraulics with varnish issues or a wind turbine gearbox with small size restrictions, the FPL can be custom designed and built to meet the exact needs to solve your contamination problems.



# FPL Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 32" (81 cm)	<b>Length</b> 50.5" (128 cm)	<b>Depth</b> 25" (63.5 cm)
<b>Connections</b>	<b>Inlet with 3-way valve</b> 1" FNPT		<b>Outlet</b> 1" FNPT
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)
<b>ΔP Indicator Trigger</b>	<b>Standard MF110 Assemblies</b> 18 psi (1.2 bar)	<b>Special Options D1</b> 22 psi (1.5 bar)	
<b>Filter Assembly Bypass</b>	<b>Standard MF110 Assemblies</b> 25 psid (1.7 bard)	<b>Special Options D1</b> 25 psid (1.7 bard)	
<b>Materials of Construction</b>	<b>Frame</b> Carbon steel with industrial coating		
<b>Electric Motor</b>	TEFC, 56-185 frame 0.5 - 7.5 hp, 900 - 1750 RPM		
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, aluminum enclosure with short circuit and overload protection.		
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.		
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>		
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>		
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$ ( $\beta_x \geq 2$ )
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>		
	<b>Model</b> Standard FPL (2x MF110 11" bowls) Special Option D1	<b>Filter Element Part Number</b> HP110NL11 – [Media Selection Code] [Seal Code] HP75L8 – [Media Selection Code] [Seal Code]	<b>Example</b> HP110NL11-12MV HP75L8-25MB
<b>Viscosity</b>	2-5000 cSt <sup>4</sup>		
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.		
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group C+D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord will be included.		

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# FPL Part Number Builder



Flow Rate <sup>1</sup>		
<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
<b>10<sup>2</sup></b>	10 gpm (37.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

Power Options	60 Hz	50 Hz	Pneumatic
<b>12</b>	120 V ac, 1P	<b>11</b> 110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
<b>22</b>	208-230 V ac, 1P	<b>21</b> 220 V ac, 1P	
<b>23</b>	208-230 V ac, 3P	<b>40</b> 380-440 V ac, 3P	
<b>46</b>	460-480 V ac, 3P	<b>52</b> 525 V ac, 3P	
<b>57</b>	575 V ac, 3P		

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**

**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option

Special Options		
<b>B</b>	Complete filter bypass line	<b>O<sup>4</sup></b> On-board PM-1 particle monitor & clean oil indicator light
<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>P<sup>5</sup></b> Phosphate ester fluid compatibility modification
<b>D1<sup>3</sup></b>	2 x S75DL8 filter assemblies in series	<b>S<sup>9</sup></b> Skydrol fluid compatibility modification
<b>D3</b>	True differential pressure gauge, visual green to red	<b>U</b> CUL and/or CSA marked starter enclosure for Canada
<b>E</b>	100 mesh cast iron basket strainer	<b>Y</b> VFD variable speed motor frequency control
<b>J</b>	Add pressure gauge between pump & filter assembly	<b>Z</b> On site start-up training
<b>K</b>	HP75L8-149W Spin-On suction strainer	<b>S2</b> 51" (130 cm) Mounting Stand - Ships Fully Assembled
<b>M</b>	Total system flow meter (120 cSt max)	

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(C)} \geq 4000$	<b>3A</b> $\beta_{4(C)} \geq 4000$	<b>25W</b> 25 $\mu$ nominal
<b>3M</b>	$\beta_{4(C)} \geq 4000$	<b>6A</b> $\beta_{6(C)} \geq 4000$	<b>40W</b> 40 $\mu$ nominal
<b>6M</b>	$\beta_{6(C)} \geq 4000$	<b>10A</b> $\beta_{11(C)} \geq 4000$	<b>74W</b> 74 $\mu$ nominal
<b>10M</b>	$\beta_{11(C)} \geq 4000$	<b>25A</b> $\beta_{22(C)} \geq 4000$	<b>149W</b> 149 $\mu$ nominal
<b>16M</b>	$\beta_{16(C)} \geq 4000$		
<b>25M</b>	$\beta_{22(C)} \geq 4000$		

Seals	
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS<sup>7</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.

<sup>3</sup>Replaces standard MF110 housings.

<sup>4</sup>"O" option not available with "X\_\_" or "Y" options.

<sup>5</sup>When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

<sup>6</sup>When selected, must be paired with Seal option "E-WS". Contact factory for more information or assistance in fluid compatibility.

<sup>7</sup>Only available in 3M media for HP75L8 series elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# FC

## Filter Cart

A fully self-contained mobile solution for bulk oil handling, fluid transfer and reservoir or gearbox conditioning.

Ideal for lower viscosity hydraulic oil, lube oil and diesel fuel.

Donaldson  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Engineered for industrial use.

Rugged construction and attention to the smallest of details come together remarkably so that nothing holds you or your equipment back. The easy to maneuver hand-truck style design with never-flat pneumatic tires and cast iron gear pump with internal relief mean you get powerful filtration exactly when and where you need it.



57

## Set the stage for your success.

Staged filtration allows a range of media selections for particulate and water removal to deliver ISO Codes right on target. Choose between dual MF110 cartridge (standard) or up to four Spin-On elements to tackle the most viscous fluids and achieve unimaginably low ISO Codes in a single pass.

## Media matters.

DFE rated filter elements stay true to efficiency ratings and ensure the highest level of particulate capture and retention capabilities. And with media options down to  $\beta_{3,C} \geq 4000$ , you can be sure contamination stays exactly where you want it: out of your systems.



## Your standard Filter Cart, reimagined.

Sample ports in the right locations arm you with access to consistently accurate system conditions which is why every FC comes standard with up- and downstream sample ports in their proper positions. And with the 35' (11m) retractable cord reel or 35' air hose for pneumatic models, it's easy to see why the standard FC isn't so standard after all.

## With options to make your job easier.

With the optional filter bypass line, cold starts, gearbox pump-outs, and even element change outs become easier than ever. Add the optional PM-1 particle monitor for real time cleanliness data and know exactly how your filtration is performing without the need for a bottle.



## Completely customizable.

The FC comes in a variety of flow rates and with electric options that range from 120 to 575 V ac, single or three phase. Or choose the pneumatic and explosion proof models to take your filtration into hazardous zones like you never thought possible. Even color coordinate each FC to your existing safety standards. With thousands of combinations to choose from, the possibilities are endless for what you can do with the FC.



# FC Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 45" (114 cm)	<b>Width</b> 20" (50 cm)	<b>Depth</b> 23" (58 cm)	<b>Approximate Weight</b> 125 lbs (57 kg)	
<b>Connections</b>	<b>Inlet</b> FC05-FC5: 1" male JIC (37° flare) FC10: 1.25" male JIC (37° flare) FC20: 1.5" male JIC (37° flare)	<b>Outlet</b> FC05-FC10 1" male JIC (37° flare) FC20: 1.25" male JIC (37° flare)	<b>Hoses</b> FC05-FC5: 1" x 10 ft (2.4 m) FC10: 1.25" x 10 ft (2.4 m) suction 1" x 10 ft (2.4 m) discharge FC20: 1.5" x 10 ft (2.4 m) suction		
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)			
<b>ΔP Indicator Trigger</b>	22 psi (1.5 bar). Consult factory for other options.				
<b>Filter Assembly Bypass</b>	25 psid (1.7 bard). Consult factory for other options.				
<b>Materials of Construction</b>	<b>Frame</b> Industrial coated steel	<b>Filter Assembly</b> Aluminum head & canister	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless Steel	<b>Element Bypass Valve</b> Nylon
<b>Electric Motor</b>	TEFC, 56-215 frame 0.5-7.5 hp, 900-1750 RPM				
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, aluminum enclosure with short circuit and overload protection.				
<b>Electric Connection</b>	Voltages 230 V ac and under, single phase: 35' (11 m) retractable cord reel included. NEMA 5-15 plug installed on Power Option 12. Voltages over 230 V ac: 35' (11 m) power cord included.				
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.				
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>				
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup> 35' (11 m) retractable air hose included when pneumatic option selected (replaces electric cord reel).				
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$ ( $\beta_x \geq 200$ )	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$ ( $\beta_x \geq 2$ )		
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>				
	<b>Model</b> Standard FC (2x MF110 11" bowls) Special Option D1	<b>Filter Element Part Number</b> HP110NL11 – [Media Selection Code] [Seal Code] HP75L8 – [Media Selection Code] [Seal Code]	<b>Example</b> HP110NL11-12MV HP75L8-25MB		
<b>Viscosity</b>	2-5000 cSt <sup>4</sup>				
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.				
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X-) selected, no electrical cord will be included.				


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# FC Part Number Builder

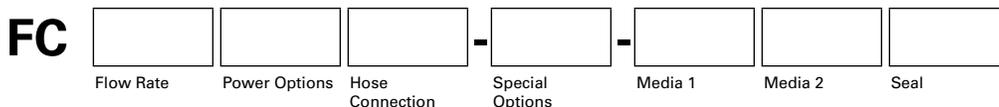

Flow Rate <sup>1</sup>		
<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
<b>10<sup>2</sup></b>	10 gpm (37.9 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
<b>20<sup>3</sup></b>	20 gpm (75.7 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)

Power Options	60 Hz	50 Hz	Pneumatic
<b>12</b>	120 V ac, 1P	<b>11</b> 110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
<b>22</b>	208-230 V ac, 1P	<b>21</b> 220 V ac, 1P	
Contact factory for options not listed <b>23</b>	208-230 V ac, 3P	<b>40</b> 380-440 V ac, 3P	
<b>46</b>	460-480 V ac, 3P	<b>52</b> 525 V ac, 3P	
<b>57</b>	575 V ac, 3P		

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**

**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option

Hose Connection	
<b>G</b>	Female BSPP swivel hose ends, no wands
<b>S</b>	Female JIC swivel hose ends, no wands
<b>W</b>	Female JIC swivel hose ends, with wands

Special Options		
<b>B</b>	Complete filter bypass line	<b>K</b> HP75L8-149W Spin-On suction strainer (Can't be paired with K option)
<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>M</b> Total system flow meter (120 cSt max)
<b>D1<sup>4</sup></b>	2 x S75DL8 filter assemblies in series	<b>O<sup>5</sup></b> On-board PM-1 particle monitor & clean oil indicator light
<b>D3</b>	True differential pressure gauge, visual green to red	<b>P9<sup>6</sup></b> Phosphate ester fluid compatibility modification
<b>E</b>	100 mesh cast iron basket strainer (Can't be paired with K option)	<b>S9<sup>7</sup></b> Skydrol fluid compatibility modification
<b>H1</b>	10' (3 m) return line hose extension	<b>U</b> CUL and/or CSA marked starter enclosure for Canada
<b>H2</b>	20' (6 m) return line hose extension	<b>Z</b> On site start-up training
<b>J</b>	Add pressure gauge between pump & filter assembly	

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25 $\mu$ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40 $\mu$ nominal
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>10A</b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74 $\mu$ nominal
<b>10M</b>	$\beta_{11(c)} \geq 4000$	<b>25A</b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149 $\mu$ nominal
<b>16M</b>	$\beta_{16(c)} \geq 4000$		
<b>25M</b>	$\beta_{22(c)} \geq 4000$		

Seals	
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS<sup>8</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.

<sup>3</sup>Contact factory for sizing assistance on all viscosities.

<sup>4</sup>Replaces standard MF110 housings.

<sup>5</sup>"O" option includes "J" option, do not have to add to part number. "O" option not available with "X\_\_" options.

<sup>6</sup>When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

<sup>7</sup>When selected, must be paired with Seal option "E-WS". Contact factory for more information or assistance in fluid compatibility.

<sup>8</sup>Only available in 3M media for HP75L8 series elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# FSL

## High Viscosity Filtration Systems

A dedicated contamination solution for bulk oil handling and fluid transfer. Designed to excel in filtering particulate from heavily contaminated oil, the FSL keeps gearbox lubricant clean and equipment running efficiently.

Ideal for high viscosity gearbox or lube applications and highly contaminated fuel applications.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter.

The oversized coreless filter element in every FSL delivers lower ISO Codes over a long element lifespan to ensure low disposal impact, simultaneously reducing your environmental footprint and your bottom line. To top it off, select elements come standard with an integral zero-leak bypass so with every filter change you get a new bypass along with peace of mind.



## Weather any condition.

From cold weather to cold starts, the FSL is engineered to easily handle almost any job. Designed to combine incredible capacity and low maintenance, the oversized housing with secure swivel bolts allow for effortless element changes with all the parts kept right where they need to be.

## Cleaner fluid + greater reliability.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. And with the cast iron gear pump with internal relief, you get the durability you want with the safety you need, all conveniently in one square foot of floor space.



## Options to make your job easier.

By selecting the optional filter bypass line, cold starts and element change-outs become easier than ever. Choose the pneumatic powered model or explosion proof option to match your application and even add the optional PM-1 particle monitor for real time cleanliness data without the need for a bottle.



## Setting the new standard.

Every FSL comes standard with sample ports in the right locations to arm you with access to consistently accurate system conditions. And with true differential pressure gages, you'll know exactly how well your filtration is performing.



## Completely customizable.

Every FSL can be tailored to meet any application and even to fit your existing safety standards. With the power to filter fluids greater than ISO VG 1500, contamination doesn't stand a chance.



# FSL Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 50" (127 cm)	<b>Width</b> 22" (56 cm)	<b>Depth</b> 28" (71 cm)	<b>Approximate Weight</b> 222 lbs (101 kg)
<b>Connections</b>	<b>Inlet with 3-way valve</b> FSL05-FSL10: 1" FNPT FSL20-FSL30: 1.5" FNPT		<b>Outlet</b> FSL05-FSL10: 1" FNPT FSL20-FSL30: 1.25" FNPT	
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)	
<b>Materials of Construction</b>	<b>Vessel</b> Carbon steel with industrial coating			
<b>Electric Motor</b>	TEFC, 56-215 frame 0.5-3 hp, 1450-1750 RPM, see Appendix for amp ratings.			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, aluminum enclosure with short circuit and overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(c)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(c)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(c)}} \geq 2$ ( $\beta_x \geq 2$ )	
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>			
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>	
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]	HP105L36–6AB	
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]	HP106L18–10MV	
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]	HP107L36–VTM710V	
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–25WV	
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L16–12MB	
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–16ME–WS	
<b>Viscosity</b>	2-5000 cSt <sup>4</sup>			
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group C+D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# FSL Part Number Builder

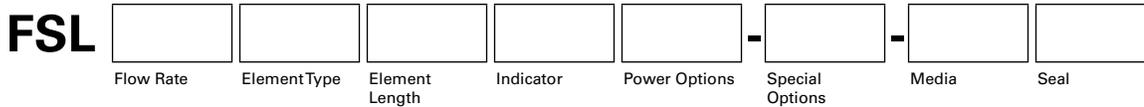

Flow Rate*	05	0.5 gpm (1.7 lpm)    900 RPM (50Hz) / 1200 RPM (60Hz)	10 <sup>1</sup>	10 gpm (37.9 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>20</b>	20 gpm (75.7 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>30</b>	30 gpm (114 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>5</b>	5 gpm (18.9 lpm)    1450 RPM (50Hz) / 1750 RPM (60Hz)		

Element Type	5	HP105 – no bypass	8X	HP8314 – no bypass
	<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass	<b>82</b>	HP8314 – 25 psid (1.7 bard) integral housing bypass
	<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass	<b>85</b>	HP8314 – 50 psid (3.4 bard) integral housing bypass

Element Length	18 <sup>2</sup>	L18 single length filter housing and coreless element	16 <sup>2</sup>	L16 single length filter housing and coreless element
	<b>36<sup>2</sup></b>	L36 single length filter housing and coreless element	<b>39<sup>2</sup></b>	L39 single length filter housing and coreless element

ΔP Indicator	D	22 psid visual gauge + electric switch	H	65 psid visual gauge + electric switch (elements 5 or 8X only)
	<b>E</b>	22 psid visual gauge	<b>J</b>	65 psid visual gauge (elements 5 or 8X only)
	<b>F</b>	45 psid visual gauge + electric switch	<b>P</b>	2 pressure gauges (industrial liquid filled)
	<b>G</b>	45 psid visual gauge		

Power Options	60 Hz	50 Hz	Pneumatic	
	<b>12</b>	120 V ac, 1P	<b>00</b>	Pneumatically driven air motor & PD pump. FRL & flow meter included.
Contact factory for options not listed	<b>22</b>	208-230 V ac, 1P		
	<b>23</b>	208-230 V ac, 3P		
	<b>46</b>	460-480 V ac, 3P		
	<b>57</b>	575 V ac, 3P		
		<b>11</b>	110 V ac, 1P	
		<b>21</b>	220 V ac, 1P	
		<b>40</b>	380-440 V ac, 3P	
		<b>52</b>	525 V ac, 3P	

## Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use

**X**\_\_ Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

Special Options	A	Air cooled heat exchanger (consult factory)	O <sup>6</sup>	On-board PM-1 particle monitor & clean oil indicator light
	<b>B</b>	Complete filter bypass line	<b>P9<sup>7</sup></b>	Phosphate ester fluid compatibility modification
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>S<sup>8</sup></b>	All wetted components 303 or higher stainless steel
	<b>D<sup>3</sup></b>	High filter ΔP auto shutdown	<b>S9<sup>9</sup></b>	Skydrol fluid compatibility modification
	<b>E<sup>4</sup></b>	100 mesh cast iron basket strainer	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle	<b>V</b>	Lifting eye kit
	<b>G</b>	Spill retention pan with fork guides (industrial coated steel)	<b>W</b>	Automatic air bleed valve
	<b>J<sup>5</sup></b>	Add pressure gauge between pump & filter assembly	<b>Y<sup>10</sup></b>	VFD variable speed motor frequency control
	<b>K<sup>4</sup></b>	HP75L8-149W Spin-On suction strainer	<b>Z</b>	On site start-up training
	<b>L</b>	High filter element ΔP indicator light		
	<b>M</b>	Total system flow meter (120 cSt max)		

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh	
	<b>05M</b>	$\beta_{0.9(c)} \geq 4000$	<b>25W</b>	25μ nominal
	<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>40W</b>	40μ nominal
	<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>74W</b>	74μ nominal
	<b>6L</b>	$\beta_{6(c)} \geq 4000$	<b>149W</b>	149μ nominal
	<b>10M<sup>11</sup></b>	$\beta_{11(c)} \geq 4000$		
	<b>16M</b>	$\beta_{16(c)} \geq 4000$		
	<b>25M</b>	$\beta_{22(c)} \geq 4000$		

## VTM

**VTM710<sup>12</sup>**  $\beta_{0.9(c)} \geq 4000$  particulate, insoluble oxidation by-product and water removal media

Seals	B	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

\*Nominal flow rates at 60 Hz motor speeds.

<sup>1</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.

<sup>2</sup>Compatibility will be based on Element Type selection. For elements HP105, HP106, and HP107, use Length code 18 or 36. Length codes 16 and 39 only compatible with HP8314 element.

<sup>3</sup>"D & L" Option requires DP Indicator option with electric switch selected (options D,F,H). "D" Option includes "L" option, do not add to part number

<sup>4</sup>"E" and "K" options can't be paired together

<sup>5</sup>"O" Option includes the "J" Option, do not pair

<sup>6</sup>"O" Option Not available with 30 GPM. "O" Option not available with "X\_\_" options.

<sup>7</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>8</sup>With exception to cast iron gear pump.

<sup>9</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>10</sup>"Y" option not available with "O" option.

<sup>11</sup>For elements HP8314, use 12M or 12A for respective media code in place of 10M or 10A.

<sup>12</sup>Only available on HP107 series elements. Flow rate should not exceed 16 gpm (60 lpm) for HP107L36-VTM710\* elements and 8 gpm (30 lpm) for HP107L18-VTM710\* elements.

# FSLD


## High Viscosity Dual Filter Skids

A dedicated contamination solution for off-line conditioning and bulk oil handling. Dual housings allow flexibility in using staged element ratings to achieve remarkably clean fluids and hit target ISO Codes in fewer passes, all while extending filter element and oil life.

Ideal for conditioning reclaimed fluids or fluids with high dirt load.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)

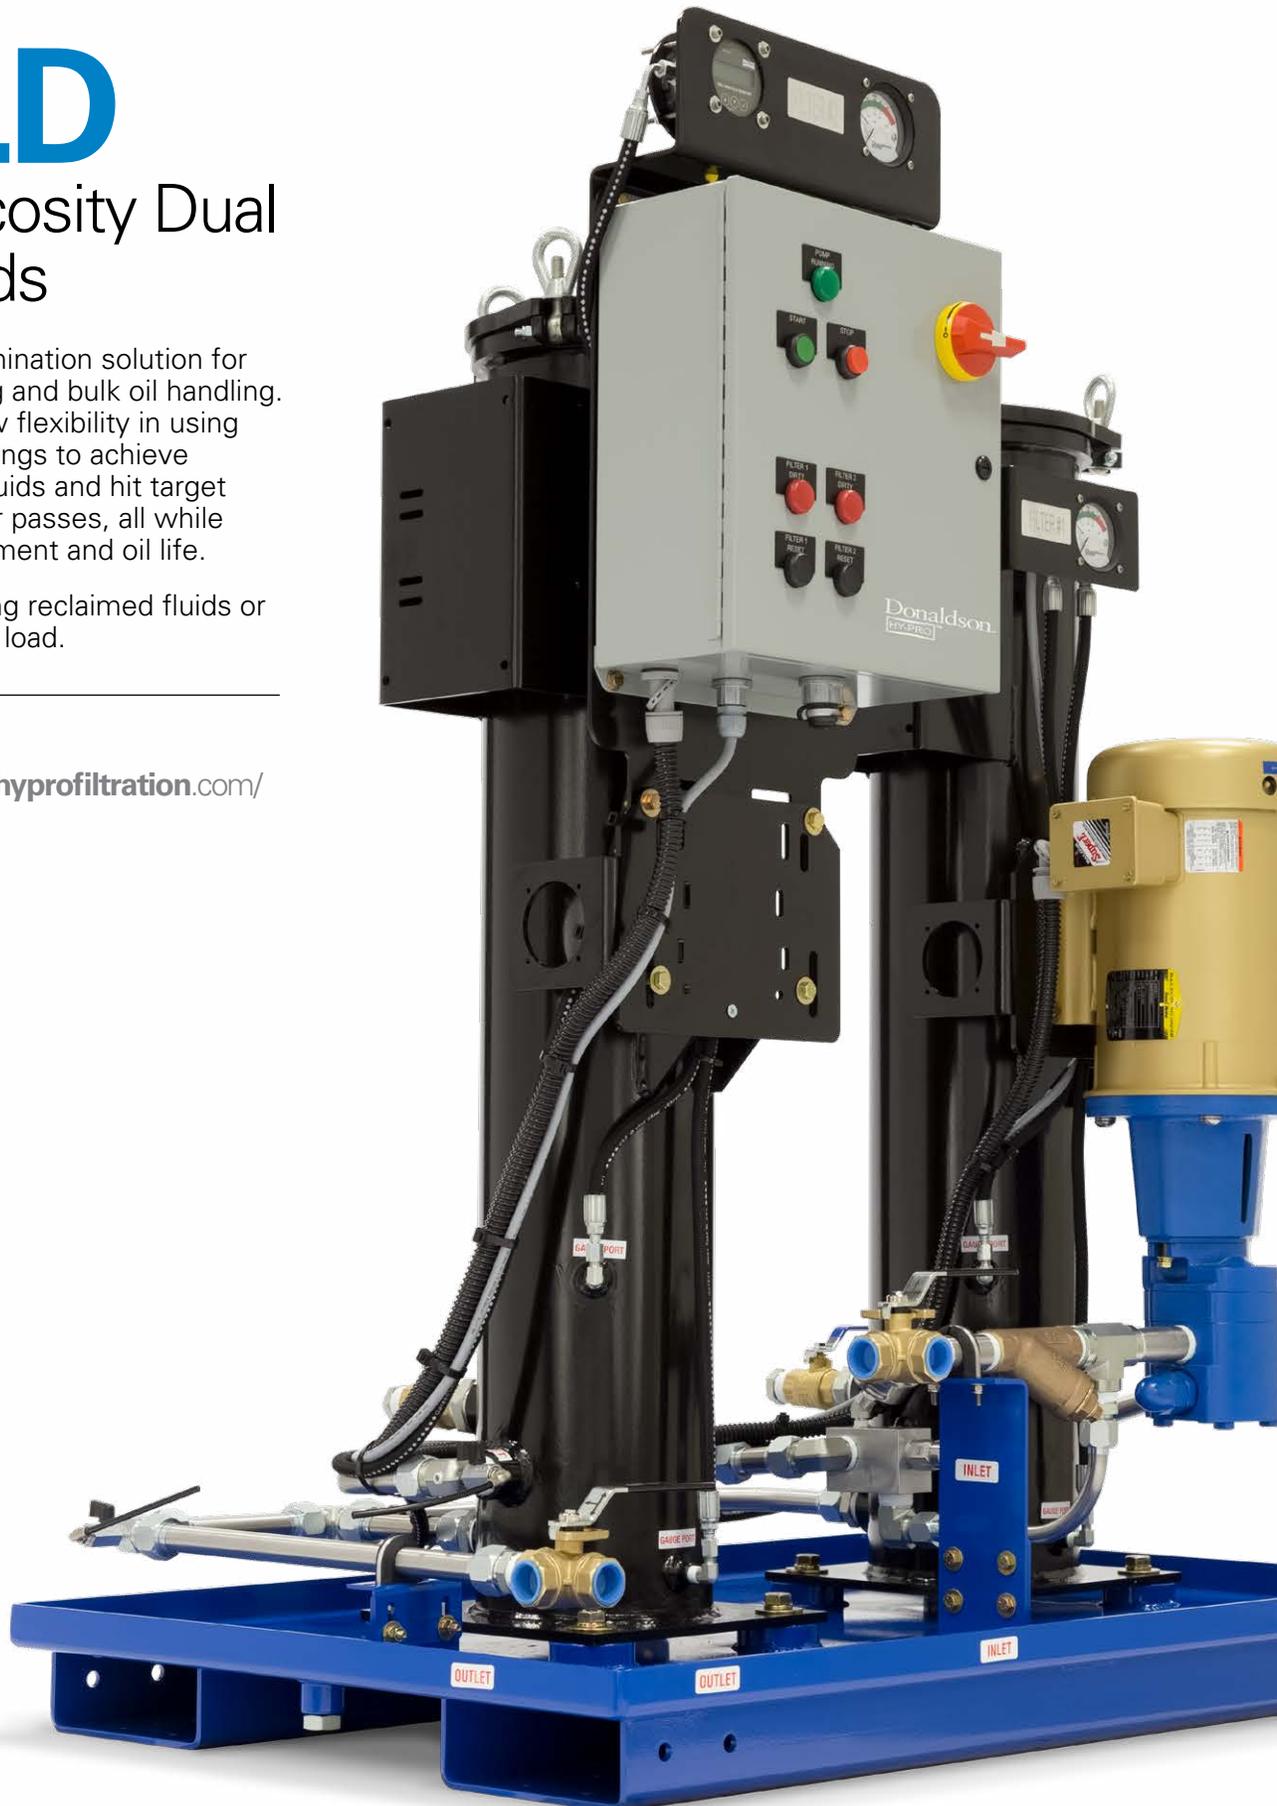

## Dynamic duo.

Combine a number of media options in the dual FSL filter housings to maximize single pass efficiency and achieve lower ISO Codes even faster than you thought possible.




## Filtration starts with the filter(s).

The FSLD's dual oversized coreless filter elements deliver lower ISO Codes over a long element lifespan to ensure low disposal impact, simultaneously reducing your environmental footprint and your bottom line. To top it off, select elements come standard with an integral zero-leak bypass, giving you time back from unnecessary gearbox rebuilds and letting you focus on what really matters.

## Engineered for Industrial use.

Rugged construction and attention to the smallest of details come together remarkably so that nothing holds you or your equipment back. The standard spill retention pan and cast iron pump with internal relief mean you get the power and durability you want with the safety you have to have. To top it off, the standard 3-way inlet valve allows you to add new oil through the filter to stop contamination before it can ever enter your system.

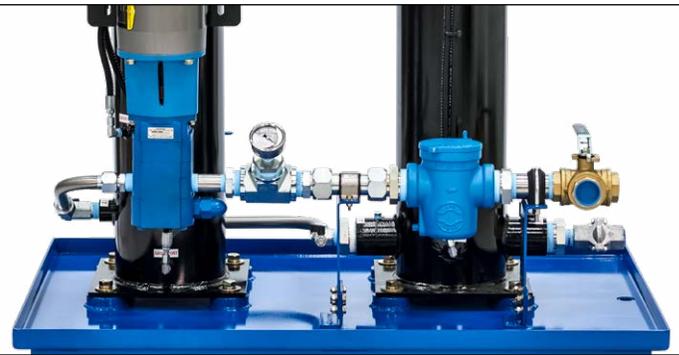


## Make your filtration count.

With the optional filter bypass line, cold starts and element change outs become easier than ever. Add to that the PM-1 Particle Monitor for real time cleanliness data and watch your ISO Codes drop like you'd never believe.

## Setting the new standard.

Every FSLD comes standard with sample ports in the proper locations to arm you with access to consistently accurate system conditions. And with true differential pressure gages, you'll always know exactly how well your filtration is performing.

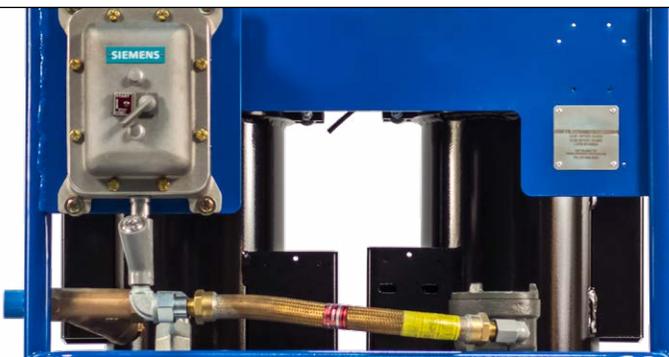

## Completely customizable.

Every FSLD can be tailored specifically to your application whether you're dealing with high viscosities, cold weather, or temperature sensitive components so you get the perfect solution to your contamination problems.

# FSLD Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 55" (139 cm)	<b>Length</b> 48" (121 cm)	<b>Width</b> 32" (81 cm)	<b>Approximate Weight</b> 484 lbs (219 kg)
<b>Connections</b>	<b>Inlet with 3-Way Valve</b> FSLD05-FSLD10: 1" FNPT FSLD20-FSLD30: 1.5" FNPT		<b>Outlet</b> FSLD05-FSLD10: 1" FNPT FSLD20-FSLD30: 1.25" FNPT	
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)	
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating	<b>Tray</b> Carbon steel with industrial coating		
<b>Electric Motor</b>	TEFC, 56-215 frame 0.5 - 7.5 HP, 900 - 1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$ ( $\beta_x \geq 2$ )	<b>VTM</b> $\beta_{0.9(c)} \geq 4000$ particulate, insoluble oxidation by-product and water removal media
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>			
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>	
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]	HP105L36–6AB	
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]	HP106L18–10MV	
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]	HP107L36–VTM710V	
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–25WV	
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L16–12MB	
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–16ME–WS	
<b>Viscosity</b>	2-5000 cSt <sup>4</sup>			
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# FSLD Part Number Builder

<b>FSLD</b>	<input type="text"/>									
	Flow Rate	Flow Type	Element Type	Element Length	Indicator	Power Options	Special Options	Media 1	Media 2	Seal

Flow Rate*	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)	<b>10</b> <sup>1</sup>	10 gpm (37.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>20</b>	20 gpm (75.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>30</b>	30 gpm (114 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)			

Flow Type	<b>D</b> <sup>2</sup>	Duplex
	<b>P</b> <sup>2</sup>	Parallel
	<b>S</b>	Series

Element Type	<b>5</b>	HP105 – no bypass	<b>8X</b>	HP8314 – no bypass
	<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass	<b>82</b>	HP8314 – 25 psid (1.7 bard) integral housing bypass
	<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass	<b>85</b>	HP8314 – 50 psid (3.4 bard) integral housing bypass

Element Length	<b>18</b> <sup>3</sup>	L18 single length filter housing and coreless element	<b>16</b> <sup>3</sup>	L16 single length filter housing and coreless element
	<b>36</b> <sup>3</sup>	L36 single length filter housing and coreless element	<b>39</b> <sup>3</sup>	L39 single length filter housing and coreless element

ΔP Indicator	<b>D</b>	22 psid visual gages + electric switches	<b>H</b>	65 psid visual gages + electric switches (elements 5 or 8X only)
	<b>E</b>	22 psid visual gages	<b>J</b>	65 psid visual gages (elements 5 or 8X only)
	<b>F</b>	45 psid visual gages + electric switches	<b>P</b>	2 pressure gages (industrial liquid filled)
	<b>G</b>	45 psid visual gages	<b>X</b>	None (ports plugged)

Power Options Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b>	
	<b>12</b> <sup>4</sup>	120 V ac, 1P	<b>11</b> <sup>4</sup>	110 V ac, 1P	<b>00</b>	Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P		
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P		
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P		
	<b>57</b>	575 V ac, 3P				

## Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use

**X**\_\_ Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

Special Options	<b>A</b>	Air cooled heat exchanger (consult factory)	<b>O</b> <sup>5</sup>	On-board PM-1 particle monitor & clean oil indicator light
	<b>B</b>	Complete filter bypass line	<b>P9</b> <sup>7</sup>	Phosphate ester fluid compatibility modification
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>R</b>	Spill retention pan with wheels (industrial coated steel)
	<b>D</b> <sup>5</sup>	High filter ΔP auto shutdown	<b>S</b> <sup>8</sup>	All wetted components 303 or higher stainless steel
	<b>E</b>	100 mesh cast iron basket strainer	<b>S9</b> <sup>9</sup>	Skydrol fluid compatibility modification
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>J</b>	Add pressure gauge between pump & filter assembly	<b>V</b>	Lifting eye kit
	<b>K</b>	HP75L8-149W Spin-On suction strainer	<b>W</b>	Automatic air bleed valve
	<b>L</b> <sup>5</sup>	High filter element ΔP indicator light	<b>Y</b>	VFD variable speed motor frequency control
	<b>M</b>	Total system flow meter (120 cSt max)	<b>Z</b>	On site start-up training

Media Selection	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>Stainless wire mesh</b>	
	<b>05M</b>	β <sub>0.9</sub> (C) ≥ 4000	<b>3A</b>	β <sub>3</sub> (C) ≥ 4000	<b>25W</b>	25μ nominal
	<b>1M</b>	β <sub>3</sub> (C) ≥ 4000	<b>6A</b>	β <sub>6</sub> (C) ≥ 4000	<b>40W</b>	40μ nominal
	<b>3M</b>	β <sub>4</sub> (C) ≥ 4000	<b>10A</b> <sup>10</sup>	β <sub>11</sub> (C) ≥ 4000	<b>74W</b>	74μ nominal
	<b>6L</b>	β <sub>6</sub> (C) ≥ 4000	<b>25A</b>	β <sub>22</sub> (C) ≥ 4000	<b>149W</b>	149μ nominal
	<b>10M</b> <sup>10</sup>	β <sub>11</sub> (C) ≥ 4000				
	<b>16M</b>	β <sub>16</sub> (C) ≥ 4000				
<b>25M</b>	β <sub>22</sub> (C) ≥ 4000					

## VTM

**VTM710**<sup>11</sup> β<sub>0.9</sub>(C) ≥ 4000 particulate, insoluble oxidation by-product and water removal media

## Bag filter

**BAG**<sup>12</sup> #2 size bag housing 25μ nominal

Seals	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.

<sup>3</sup>When selected, omit Media 2 option from part number builder. Element chosen will be supplied for both filter housings.

<sup>4</sup>Compatibility will be based on Element Type selection. For elements HP105, HP106, and HP107, use Length code 36. Length code 39 only compatible with HP8314.

<sup>5</sup>High amp draw on 10 GPM models. Estimated FLA 18. See Appendix for details.

<sup>6</sup>Requires ΔP Indicator option with electric switch selected (options D, F, H).

<sup>7</sup>"O" Option not available with "X\_\_" or "Y" options. "O" Option includes "J" option, do not add to part number. "O" Option not available with 30 GPM flow rate.

<sup>8</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>9</sup>With exception to cast iron gear pump.

<sup>10</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>11</sup>For elements HP8314, use 12M or 12A for respective media code in place of 10M or 10A.

<sup>12</sup>Only available on HP107 series elements. Flow rate should not exceed 16 gpm (60 lpm) for HP107L36-VTM710\* elements and 8 gpm (30 lpm) for HP107L18-VTM710\* elements.

<sup>13</sup>Available in series 1 housing only. Replaces Element Type in series 1 housing.

# FSW

## Wall Mounted Filtration Systems

A compact, dedicated off-line contamination solution ideal for small reservoirs, gearboxes and diesel engine crankcase conditioning. Element media options for every application including particulate removal, water absorption, varnish and acid removal.

Compact and compatible, the FSW is the perfect off-line filtration system for removing contamination from your systems and making sure they remain in peak operating condition.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## User friendly on a whole new scale.

With everything you need together in one tiny little package, FSW service and operation couldn't be easier. From the top loading housing to sample ports, the FSW is built to match powerful filtration with your convenience. And with the no-tools-required swing bolt enclosure, worrying about lost parts during service becomes a thing of the past.



## Elements that go beyond industry standard.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3|C|} > 4000 +$  water absorption and integral element bypass valves, you get the perfect element for your application, every time.

## ICB Advanced Resin Technologies.

ICB canisters treat your oil on a molecular level removing acids, soluble oxidation by-products (varnish), dissolved metals, and extending useful fluid life by protecting AO additives or improving FRF resistivity. Let us help you pick the right Ionic Charged Bonding media for your turbine & compressor lube oil varnish challenges or to help you achieve trouble free phosphate ester maintenance.



## AW oils, say goodbye to varnish.

FSW fitted with VTM media removes insoluble varnish and water while delivering incredibly low ISO Codes. Ideal for plastic injection molding and steel mill hydraulics with sensitive servo controls that fall victim to high temperature related insoluble varnish issues.

## Dedicated to your success.

The FSW provides dedicated off-line filtration to help you stay in control of total system cleanliness and prolong the life of your critical components. And with standard sample ports in their proper positions, you'll be able to see just how good it can be running your equipment with clean oil.



## Small size, huge results.

FSW provides world class filtration in all the tight spaces where you need it most with a compact wall mount arrangement. Combine FSW with a second LFW modular housing for multiple filtration passes, or to combine Ionic Charged Bonding Filter Elements and particulate removal technologies in series for the perfect comprehensive filtration system.

# FSW Specifications


<b>Dimensions<sup>1</sup></b>	<b>Height</b> 22" (56 cm)	<b>Width</b> 22" (56 cm)	<b>Depth</b> 13" (33 cm)	<b>Approximate Weight</b> 138 lbs (63 kg)
<b>Mounting &amp; Clearance</b>	Contact factory for detailed system and mounting dimensions.			
<b>Connections</b>	<b>Inlet</b> ¾" male JIC 37° flare		<b>Outlet</b> ¾" male JIC 37° flare	
<b>Operating Temperature</b>	<b>Dualglass, Stainless wire mesh, VTM</b> 30°F to 225°F (0°C to 105°C)	<b>ICB</b> 86°F to 176°F (30°C to 80°C)	<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)	
<b>Materials of Construction</b>	<b>Vessel</b> Carbon steel with industrial coating			
<b>Electric Motor</b>	TEFC, 56 frame 0.5 – 1.5HP, 900 – 1750 RPM			
<b>Motor Starter</b>	Motor starter with overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar)			
<b>Pneumatic Option Air Consumption</b>	~15 cfm @ 60 psi <sup>2</sup>			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(c)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(c)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(c)}} \geq 2$ ( $\beta_x \geq 2$ )	
	<b>VTM</b> $\beta_{0.9_{(c)}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media	<b>ICB</b> Ion charge bonding resin media for molecular removal of acids, varnish deposits, soluble oxidation by-products and dissolved metal ions. Contact factory for fluid specification.		
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>			
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>	
	4	ICB – 601946 – [ICB Media Selection Code]	ICB-601946-J	
	6	HP106L10 – [Media Selection Code] [Seal Code]	HP106L10-10AB	
	7	HP107L10 – [Media Selection Code] [Seal Code]	HP107L10-3MV	
<b>Viscosity</b>	10-5000 cSt <sup>3</sup>			
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			
<b>Filter Sizing Guidelines</b>	LFW filter sizing guidelines.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>3</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# F5W Part Number Builder

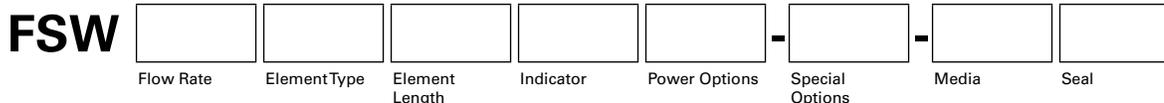

Flow Rate <sup>1</sup>	05	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	1	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	2	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	5	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

Element Type	4 <sup>2</sup>	ICB-601946
	6	HP106 coreless element, 25 psid (1.7 bard) integral element bypass
	7	HP107 coreless element, 50 psid (3.4 bard) integral element bypass

Element Length	10	L10 single length filter housing and element
----------------	----	--

ΔP Indicator	D	22 psid visual gauge + electric switch
	E	22 psid visual gauge
	F	45 psid visual gauge + electric switch
	G	45 psid visual gauge
	P <sup>3</sup>	2 pressure gages (industrial liquid filled)

Power Options	60 Hz	50 Hz	Pneumatic
	12	120 V ac, 1P	00 Pneumatically driven air motor & PD pump. FRL & flow meter included.
	22	208-230 V ac, 1P	
	23	208-230 V ac, 3P	
	46	460-480 V ac, 3P	
	57	575 V ac, 3P	
Contact factory for options not listed		11	110 V ac, 1P
		21	220 V ac, 1P
		40	380-440 V ac, 3P
		52	525 V ac, 3P

## Explosion proof - Class 1, Division 1, Group C+D per NEC 501 – Ready for outdoor use

X\_\_ Add X prefix to power option listed above. Not available with (00) Pneumatic Option

Special Options	B	Complete filter bypass line	S2	51" (130 cm) Mounting stand – ships fully assembled
	C	CE marked for machinery safety directive 2006/42/EC	S9 <sup>6</sup>	Skydrol fluid compatibility modification
	F	Filter element ΔP gauge with tattle tale follower needle	U	CUL and/or CSA marked starter enclosure for Canada
	J	Add pressure gauge between pump & filter assembly	V	Lifting eye kit
	O <sup>4</sup>	On-board PM-1 particle monitor & clean oil indicator light	W	Automatic air bleed valve
	P9 <sup>5</sup>	Phosphate ester fluid compatibility modification	Y <sup>7</sup>	VFD variable speed motor frequency control
			Z	On site start-up training

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
	05M	1A	25W
	1M	3A	40W
	3M	6A	74W
	6L	10A	149W
	10M	25A	
	16M		
	25M		

## VTM

VTM710<sup>8</sup> β<sub>0.9</sub>(<sub>c</sub>) ≥ 4000 particulate, insoluble oxidation by-product and water removal media

## ICB – max reservoir size

ICBA<sup>9</sup> Phosphate ester – 150 gal (567 liters)  
 ICBJ<sup>9</sup> Jet lube aeroderivative – 100 gal (376 liters)  
 ICBT<sup>9</sup> Specified fluids – 600 gal (2271 liters)  
 ICBV<sup>9</sup> Mineral based R&O turbine/compressor lube oil – 400 gal (1514 liters)

Seals	B	Nitrile (Buna)
	V	Fluorocarbon
	E-WS	EPR seals + stainless steel support mesh

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Compatible only with Flow Rate "05" and ICB Media Selection. "05" no "O" option or "x\_".

<sup>3</sup>Required when selected with ICB media from Element Type.

<sup>4</sup>Not available with "X\_" electrical option or VFD "Y" option.

<sup>5</sup>When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

<sup>6</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>7</sup>"Y" option not available with "O" option.

<sup>8</sup>Only available on HP107 series elements. Flow rate should not exceed 4 gpm (15 lpm) for HP107L10-VTM710\* elements.

<sup>9</sup>Compatible only with Flow Rate "05" and Element Type "4"



# FCL

## High Viscosity Filter Cart

A self contained solution for high viscosity bulk oil handling, fluid transfer and reservoir or gearbox conditioning.

Ideal for higher viscosity lube oil and highly contaminated fuel and hydraulic oil.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)

## Built-in versatility.

From cold weather to cold starts, the FCL is engineered to easily handle almost any job you can throw at it. Rugged construction including the heavy duty, oversized filter housing and cast iron gear pump with internal relief all come together so that you can be sure the FCL will tackle your application with ease.



## Filtration starts with the filter.

The oversized coreless filter element in every FCL delivers lower ISO Codes over a long element lifespan to ensure low disposal impact, simultaneously reducing your environmental footprint and your bottom line. To top it off, select elements come standard with an integral zero-leak bypass so with every filter change you get a new bypass along with peace of mind.




## Unmatched on the move.

Non-shredding wheels, optional off-road, heavy duty tires, and easy to maneuver cart design with ergonomic handle mean you get powerful filtration exactly when and where you need it.



## Setting the new standard.

Sampling is no longer an option, it's a necessity. That's why every FCL comes standard with upstream and downstream sample ports located in the proper positions for best practice oil sampling. You'll get consistently accurate readings and a first hand view at just how well your FCL is working.

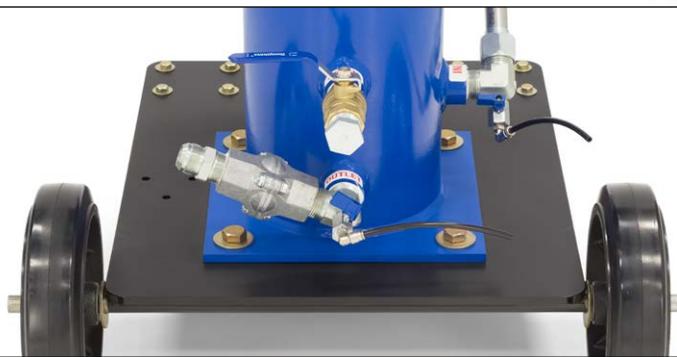

## With options to make your job easier.

Use the FCL to pump out your gearbox or to ease cold starts and get your system up to temperature faster with the optional complete filter bypass line. Add on the PM-1 Particle Monitor to see real time ISO Codes of your fluid and you'll be amazed to watch how effective your FCL will be.



## Completely customizable.

Tailor your FCL specifically to your application with options including pneumatic or explosion proof models, CE and CUL marks, and stainless steel construction for safety and compatibility with your existing systems. And if you're nice, we'll even let you trick it out with a custom paint job.



# FCL Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 57" (144 cm)	<b>Width</b> 30" (77 cm)	<b>Depth</b> 30" (77 cm)	<b>Approximate Weight</b> 351 lbs (159 kg)
<b>Connections</b>	<b>Inlet</b> FCL05-FCL5: 1" male JIC (37° flare) FCL10: 1.25" male JIC (37° flare) FCL20-FCL30: 1.5" male JIC (37° flare)	<b>Outlet</b> FCL05-FCL10: 1" male JIC (37° flare) FCL20-FCL30: 1.25" male JIC (37° flare)	<b>Hoses</b> FCL05-FCL5: 1" x 10 ft (2.4 m) FCL10: 1.25" x 10 ft (2.4 m) suction 1" x 10 ft (2.4 m) discharge FCL20-FCL30: 1.5" x 10 ft (2.4 m) suction 1.25" x 10 ft (2.4 m) discharge	
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)		
<b>Materials of Construction</b>	<b>Housing</b> Carbon steel with industrial coating	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless steel	
<b>Electric Motor</b>	TEFC, 56-215 frame 0.5 – 7.5HP, 900 – 1750 RPM, see Appendix for amp ratings.			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.			
<b>Electric Connection</b>	Voltages 230 V ac and under, single phase: 35' (11 m) retractable cord reel included. NEMA 5-15 plug installed on Power Option 12. Voltages over 230 V ac: 35' (11 m) loose cord included.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup> 35' (11 m) retractable air hose included when pneumatic option selected. Replaces 35' (11m) electric cord reel.			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$ ( $\beta_x \geq 2$ )	<b>VTM</b> $\beta_{0.9(c)} \geq 4000$ particulate, insoluble oxidation by-product and water removal media
<b>Replacement Elements</b>	<b>To determine replacement elements, use corresponding codes from your equipment part number:</b>			
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>	
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]	HP105L36–6AB	
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]	HP106L18–10MV	
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]	HP107L36–VTM710V	
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–25WV	
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L16–12MB	
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]	HP8314L39–16ME–WS	
<b>Viscosity</b>	2-5000 cSt <sup>4</sup>			
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

<sup>4</sup>When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

# FCL Part Number Builder

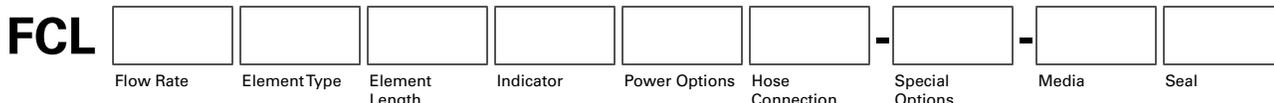

<b>Flow Rate*</b>	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)	<b>10<sup>1</sup></b>	10 gpm (37.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>20</b>	20 gpm (75.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)	<b>30</b>	30 gpm (114 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)			

<b>Element Type</b>	<b>5</b>	HP105 – no bypass	<b>8X</b>	HP8314 – no bypass
	<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass	<b>82</b>	HP8314 – 25 psid (1.7 bard) integral housing bypass
	<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass	<b>85</b>	HP8314 – 50 psid (3.4 bard) integral housing bypass

<b>Element Length</b>	<b>16<sup>2</sup></b>	L16 single length filter housing and coreless element	<b>18<sup>2</sup></b>	L18 single length filter housing and coreless element
	<b>36<sup>2</sup></b>	L36 single length filter housing and coreless element	<b>39<sup>2</sup></b>	L39 single length filter housing and coreless element

<b>ΔP Indicator</b>	<b>D</b>	22 psid visual gauge + electric switch	<b>H</b>	65 psid visual gauge + electric switch (elements 5 or 8X only)
	<b>E</b>	22 psid visual gauge	<b>J</b>	65 psid visual gauge (elements 5 or 8X only)
	<b>F</b>	45 psid visual gauge + electric switch	<b>P</b>	2 pressure gages (industrial liquid filled)
	<b>G</b>	45 psid visual gauge		

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b>
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
	<b>57</b>	575 V ac, 3P			

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**

**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Hose Connection</b>	<b>G</b>	Female BSPP swivel hose ends, no wands
	<b>S</b>	Female JIC swivel hose ends, no wands
	<b>W</b>	Female JIC swivel hose ends, with wands

<b>Special Options</b>	<b>B</b>	Complete filter bypass line	<b>M</b>	Total system flow meter (120 cSt max)
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC	<b>O<sup>4</sup></b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>D<sup>3</sup></b>	High filter ΔP auto shutdown	<b>P9<sup>5</sup></b>	Phosphate ester fluid compatibility modification
	<b>E</b>	100 mesh cast iron basket strainer	<b>R</b>	Spill retention pan with 4.5" caster wheels (industrial coated steel)
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle	<b>S<sup>6</sup></b>	All wetted components 303 or higher stainless steel
	<b>G</b>	Spill retention pan with fork guides (industrial coated steel)	<b>S9<sup>7</sup></b>	Skydrol fluid compatibility modification
	<b>H1</b>	10' (3 m) return line hose extension	<b>T<sup>8</sup></b>	Foam filled off-road tires for rugged environment
	<b>H2</b>	20' (6 m) return line hose extension	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>J</b>	Add pressure gauge between pump & filter assembly	<b>W</b>	Automatic air bleed valve
	<b>K</b>	HP75L8-149W Spin-On suction strainer	<b>Y</b>	VFD variable speed motor frequency control
	<b>L</b>	High filter element ΔP indicator light	<b>Z</b>	On site start-up training

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>Stainless wire mesh</b>	
	<b>05M</b>	β <sub>0.9(c)</sub> ≥ 4000	<b>3A</b>	β <sub>4(c)</sub> ≥ 4000	<b>25W</b>	25μ nominal
	<b>1M</b>	β <sub>3(c)</sub> ≥ 4000	<b>6A</b>	β <sub>6(c)</sub> ≥ 4000	<b>40W</b>	40μ nominal
	<b>3M</b>	β <sub>4(c)</sub> ≥ 4000	<b>10A<sup>9</sup></b>	β <sub>11(c)</sub> ≥ 4000	<b>74W</b>	74μ nominal
	<b>6L</b>	β <sub>6(c)</sub> ≥ 4000	<b>25A</b>	β <sub>22(c)</sub> ≥ 4000	<b>149W</b>	149μ nominal
	<b>10M<sup>9</sup></b>	β <sub>11(c)</sub> ≥ 4000				
	<b>16M</b>	β <sub>16(c)</sub> ≥ 4000				
	<b>25M</b>	β <sub>22(c)</sub> ≥ 4000				

**VTM**  
**VTM710<sup>10</sup>** β<sub>0.9(c)</sub> ≥ 4000 particulate, insoluble oxidation by-product and water removal media

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.  
<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.  
<sup>3</sup>Compatibility will be based on Element Type selection. For elements HP105, HP106, and HP107, use Length code 18 or 36. Length codes 16 and 39 only compatible with HP8314.  
<sup>4</sup>"D & L" Option requires DP Indicator option with electric switch selected (options D,F,H).  
<sup>5</sup>"O" Option not available with "X\_\_" or "Y" options. "O" Option includes "J" option, do not add to part number. "O" Option not available with 30 GPM flow rate.  
<sup>6</sup>When selected, must be paired with Seal option "V" Contact factory for more information or assistance in fluid compatibility.  
<sup>7</sup>With exception to cast iron gear pump.  
<sup>8</sup>When selected, must be paired with Seal option "E-WS" Contact factory for more information or assistance in fluid compatibility.  
<sup>9</sup>When selected, front casters of unit will be replaced with stationary feet. "T" Option not available with "G & R" options.  
<sup>10</sup>For elements HP8314, use 12M or 12A for respective media code in place of 10M or 10A.  
<sup>11</sup>Only available on HP107 series elements. Flow rate should not exceed 16 gpm (60 lpm) for HP107L36-VTM710\* elements and 8 gpm (30 lpm) for HP107L18-VTM710\* elements.  
 For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# HS

## Heater Skids

Designed to achieve target ISO Codes and safely heat hydraulic and lube oils, the HS is a fully self-contained heating and filtration solution ideal for service applications, mass fluid transfers, and preheating systems before they come online.

Completely customizable for hydraulic fluids and high viscosity lubrication oils up to ISO VG 680.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## More than your standard heater skid.

Whether you're performing a high velocity flush or preheating your system before it comes online, knowing your fluids are clean is the first step in extending your system and components' lifespans. HS heater skids come standard with properly positioned sample ports both up and downstream of the filter so you get consistently accurate readings and the knowledge that your system is operating as efficiently as possible.



## Rock solid from the ground up.

Standard carbon steel spill retention pans with fork guides provide a sturdy base to contain everything you need together in a single package. Add the 6" caster option for increased mobility or even select options for CE or CUL markings to meet required safety standards.

## You can't beat the heat.

With no direct contact with the heating element, your fluid will safely and quickly get up to temperature without the risk of burning. The programmable temperature control and integral no-flow switch prevent oil damage and allow you to heat your fluids at your own pace. And what's more: all this comes standard on every HS.



## Take control of your systems.

Smart relay enabled controls make the HS series heater skids easy to operate with just the push of a button. Take it one step further and select the optional PLC touch screen and make accessing real time data as easy as using that smartphone of yours.

## Filtration starts with the filter.

Within the housing on every HS is a powerful tool to help you get the most of your system and protect your critical components from particulate erosion. Media options down to  $\beta_{3, \text{Cl}} \geq 4000$  on the oversized filter element deliver lower ISO Codes over longer periods of time, letting you clean your new or in use oil to ensure long gear and bearing life.



## Fits like a glove.

Designed and built specifically to meet your system's needs, HS heater skids can be completely customized so you get the powerful heating and filtration you need for that mass fluid transfer along with all the options you want to make the job easier than ever.

# HS Specifications

**Dimensions** Consult factory with model number for dimensions and connection sizes.

**Operating Temperature**

**Fluid Temperature**  
30°F to 225°F  
(0°C to 105°C)

**Ambient Temperature**  
-4°F to 104°F  
(-20C to 40C)

**Materials of Construction**

**Housing**  
Carbon steel with industrial coating

**Tray**  
Carbon steel with industrial coating

**Plumbing**  
Carbon steel with industrial coating

**Heater**  
Aluminum low watt density fin tube

**Electric Motor** TEFC with overload protection

**Pump** Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar).

**Pump Relief Setting** 85 psi (5.86 bar)

**Media Description**

**M**  
G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids.  $\beta_{x_{(C)}} \geq 4000$

**W**  
Stainless steel wire mesh media  $\beta_{x_{(C)}} \geq 2$  ( $\beta_x \geq 2$ )

**Replacement Elements**

To determine replacement elements, use corresponding codes from your equipment part number:

**Element Type Code**  
LF7  
LF8

**Filter Element Part Number**  
HP107L[Length Code] – [Media Selection Code][Seal Code]  
HP8314L[Length Code] – [Media Selection Code][Seal Code]


**Example**  
HP107L36–25MV  
HP8314L16–12MB

**Fluid Compatibility**

Petroleum and mineral based fluids (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.

**Filter Sizing Guidelines** See LF filter sizing guidelines

# HS Part Number Builder

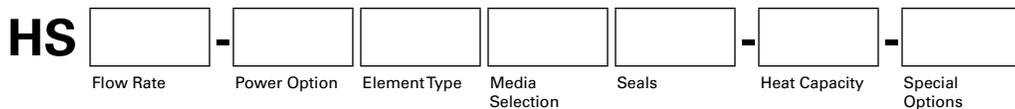

Flow Rate <sup>1</sup>					
<b>3</b>	3 gpm (11.4 lpm)			<b>20</b>	20 gpm (75.7 lpm)
<b>5</b>	5 gpm (18.9 lpm)			<b>30</b>	30 gpm (114 lpm)
<b>10</b>	10 gpm (37.9 lpm)			<b>45</b>	45 gpm (170 lpm)
<b>15</b>	15 gpm (56.8 lpm)			<b>60</b>	60 gpm (225 lpm)

Power Options	60 Hz		50 Hz	
<b>23</b>	230 V ac, 3P		<b>22</b>	220 V ac, 3P
<b>46</b>	460-480 V ac, 3P		<b>38</b>	380 V ac, 3P
<b>57</b>	575 V ac, 3P		<b>41</b>	415 V ac, 3P

Element Type		
<b>LF7</b>	LF housing with HP107L36 filter coreless element with integral element 50 psid (3.4 bard) bypass	
<b>LF8</b>	LF housing with HP8314L39 filter coreless element with integral post 50 psid (3.4 bard) bypass	
<b>X</b>	No filter housing	

Media Selection	G8 Dualglass		Stainless wire mesh	
<b>1M</b>	$\beta_{3(C)} \geq 4000$		<b>25W</b>	25 $\mu$ nominal
<b>3M</b>	$\beta_{4(C)} \geq 4000$		<b>40W</b>	40 $\mu$ nominal
<b>6L</b>	$\beta_{6(C)} \geq 4000$		<b>74W</b>	74 $\mu$ nominal
<b>10M<sup>3</sup></b>	$\beta_{11(C)} \geq 4000$		<b>149W</b>	149 $\mu$ nominal
<b>16M</b>	$\beta_{16(C)} \geq 4000$		<b>250W</b>	250 $\mu$ nominal
<b>25M</b>	$\beta_{22(C)} \geq 4000$			

Seals		
<b>B</b>	Nitrile (Buna)	
<b>V</b>	Fluorocarbon	

Heat Capacity				
<b>12</b>	1 x 12 kw heater		<b>36</b>	3 x 12 kw heaters
<b>24</b>	2 x 12 kw heaters		<b>48</b>	4 x 12 kw heaters
			<b>64</b>	4 x 16 kw heaters

Special Options				
<b>8</b>	8" solid steel wheel caster upgrade		<b>P9<sup>4</sup></b>	Phosphate ester fluid compatibility modification
<b>B</b>	Basket strainer		<b>S</b>	304 stainless steel filter vessels
<b>C</b>	CE marked for machinery safety directive 2006/42/EC		<b>S9<sup>5</sup></b>	Skydrol fluid compatibility modification
<b>D</b>	High filter element $\Delta P$ indicator light		<b>T</b>	Hose kit (suction/return hoses & wands)
<b>J</b>	Individual heater selector switch		<b>U</b>	50' (13 m) electrical cord (no plug)
<b>M</b>	Discharge line visual flow meter		<b>V</b>	Inlet control valve N/C solenoid
<b>O</b>	On-board PM-1 particle monitor		<b>Y</b>	VFD variable speed motor frequency control

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Option only available when coupled with 4 kw heater option and 3 or 5 gpm max flow rate unit.

<sup>3</sup>For elements HP8314, use 12M for media code in place of 10M.

<sup>4</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>5</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# Diesel Contamination

## Types, Removal & Prevention

There are three main types of contamination related to Diesel fuels which can be introduced at any and all stages of the supply chain. To protect your systems and components, these contaminants must be removed prior to introduction into your system or you risk exposing your fuel injectors, fuel pumps, and every part of your system to catastrophic wear and premature failure. When today's high pressure combustion engines fail,

contamination is typically to blame. Hard particles, water and microbial growth are the primary contamination culprits that must be removed from diesel fuel to prevent fuel injector and pump failure and achieve trouble free operation.

### Dirt & Particulate



Ultra fine particles at higher pressures in today's diesel engines can be a major source of fuel injector and pump failures, component wear, and loss of efficiency across entire systems. When particles get jammed inside a metal surface, it cuts a groove as it passes in a process known as scoring. Scoring can be a source of internally generated contamination and cause ISO Codes to increase, leading to the further degradation of system components.

### Water



While all diesels contain water to some degree, it is crucial to prevent free water from reaching modern fuel systems as recommended by manufacturers and to prevent both direct and indirect damage caused by water. Water contamination in USLD diesel fuels leads to accelerated microbial growth (more on that below) and contributes to combustion engine failure and fuel efficiency loss. It can also cause the formation of rust, component corrosion and abrasion, etching, cavitation, and can even freeze in cold temperatures.

### Microbial



With free water present in diesel fuels, microbial organisms can flourish to form slimes and sludge (soft solids) that clog fuel delivery systems and filters. If microbial growth is prevalent enough, it can even lead to high acidity which corrodes fuel systems and storage tanks, further exacerbating fuel degradation and increasing the likelihood of fuel oxidation. By removing water from diesel fuels, you alter the environment to discourage microbial growths and keep your system operating at peak efficiencies.

## Prioritize Diesel Filtration

**The first priority when it comes to fuel filtration is to remove the dirt. Expose your engine to dirty fuel and you risk your on-board particulate filter and fuel/water separators becoming clogged, giving you equipment alarms, damage, failures, and a massive headache. All that productivity you've had the last quarter? Kiss that goodbye.**

➤ The most effective and efficient way to clean up diesel is to filter remove particulate with high efficiency media filter elements then come in after to remove the water. With effective particulate contamination upstream, coalesce technology, which is featured in all of the systems listed below, removes all free and emulsified water down to saturation point in a single pass. Lucky for you, our diesel systems combine unmatched particulate filtration and water removal into one system to let you focus on the job at hand and leave worrying about contamination behind.

Whereas hydraulic and lube systems are able to constantly recirc fluids using off-line kidney loops, diesel fuel applications consume fluids – meaning the best option is to condition the fuel is in transit to and from storage tanks, day tanks, service trucks, or as it is dispensed from a service truck or to a fuel rail. Those transition points are the optimal time in which contamination can enter diesel fuels. Ideally, implementing filtration at each step of the way and preventing possible sources of ingress will help rid your fuels of contamination and leave your equipment running to at the highest efficiencies.

**COD**  
Diesel Conditioning  
Systems



**80** CODs offer complete diesel conditioning to remove particulate, water, and bacterial contamination from your diesel. Available in both off-line (kidney loop) and on-line (CODX) systems, CODs utilize high capacity DFE rated filter elements to remove particulate with incredible efficiency upstream of the Coalesce housing, giving you clean, dry fuels and protecting your injectors. Standard models can be sized up to 600 gpm (2271 lpm) to work with diesel powered turbines or down to as few as 5 gpm (19 lpm) for the smallest of diesel reservoirs.

**FSLCOD**  
Compact Diesel  
Conditioning  
Systems



**84** A smaller and more compact alternative to full size COD systems, FSLCODs utilize a condensed design perfect for marine and any applications requiring size restrictions. Ideal for permanent installation on-board sea vessels and diesel applications requiring compact size restrictions.

**FCLCOD**  
Diesel Conditioning  
Filter Cart



**88** For those applications requiring filtration on the go, FCLCOD Diesel Conditioning Filter Carts provide the same unmatched filtration capabilities as the COD and FSLCOD in a mobile platform perfect for facilities and tank farms with multiple diesel storage sites.

**CSD**  
Diesel Coalescing  
In-Line Filter  
Assembly



**92** Ideal for construction fueling depots, tank farms and common fuel rail applications with particulate filtration already in place, CSD Diesel Coalescing systems provide in-line single pass water removal efficiency down to 50 ppm. Matched to your existing system flow, CSDs give you incredible flexibility for installation and allow you to filter the fuels that pass through.

# COD

## Diesel Conditioning Systems

Remove water and particulate to extend fuel injector life and increase combustion engine fuel efficiency.

Ideal for large mining and construction fueling depots, diesel fueled turbines, backup generators, and smaller day tank dispensing or on-board fueling truck applications. With options for adding non-powered units to existing fuel dispensing lines, there's a perfect COD for all of your diesel applications.

Donaldson.  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter(s).

COD combines high efficiency single pass particulate and water removal to ensure that your fuel is always in spec, eliminating wear related injector failures. Achieve cleanliness below the 18/16/13 ISO Code limit required by engine manufacturers with  $5_{[c]} > 4000$  media elements and extend the life of on-board fuel filters that plug and cause replacement downtime that can shut down your entire mining group.




## Redefining standard filtration.

For high pressure injectors, water is one of the worst forms of contamination. The solution for your water contamination lies in COD's 100% synthetic coalesce/separator elements that remove all free and emulsified water down to 50 ppm. Your fuel rail and high pressure injectors will be protected and running more efficiently than ever.

## Increase fuel efficiency, lower emissions.

Cleaner fuel runs more efficiently and with lower emissions, yielding better injector performance and life and can even lead to lower fuel usage – which translates to bottom line profitability and a drastically lower environmental footprint. Monitor your fuels' condition with properly positioned sample ports before the pre-filter and after the coalesce stage and always know how your filtration is performing.

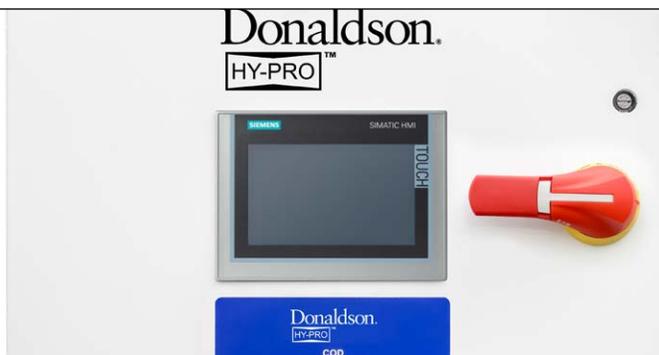

## Take control of your systems.

Smart relay and auto water drain make COD a 24/7 unattended, easy-to-operate solution that functions as an in-line contamination barrier for every drop of fuel that goes into your engines. Optional PLC touchscreen enables custom programming so your COD can purify backup fuel tanks on your schedule and even data log ISO Codes and saturation levels so you know your fuel is clean and reliable when you're on and off the clock.


## Integrated results.

For fuel delivery systems already in place, the CODX non-powered skids are the perfect addition for seamless integration and contain all the contamination removal technology of powered COD units. Ideal for fueling depots, bulk fuel deliveries, upgrading common fuel rails, on-board engine and marine applications.



## Built to exceed your expectations.

Flexible dimension and process arrangement are available with every COD so you get the perfect contamination solution for your fuel delivery system. Even choose from explosion proof models and color coordinate to fit perfectly with your existing safety standards for the ultimate system in diesel conditioning.

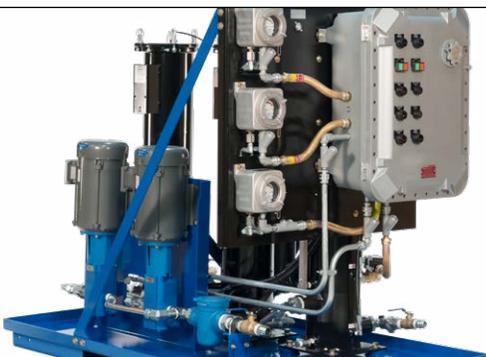

# COD Specifications

Model	COD5-10-30	COD60-100	COD200	COD300-400	COD500-600
Height <sup>1</sup>	72" (183 cm)	80" (203 cm)	90" (229 cm)	90" (229 cm)	90" (229 cm)
Length <sup>1</sup>	48" (122 cm)	72" (183 cm)	84" (213 cm)	84" (213 cm)	96" (244 cm)
Width <sup>1</sup>	42" (107 cm)	36" (92 cm)	48" (122 cm)	60" (152 cm)	60" (152 cm)
Approximate Weight <sup>1</sup>	1200 lbs (454 kg)	2000 lbs (907 kg)	2400 lbs (1089 kg)	3500 lbs (1588 kg)	4200 lbs (1905 kg)
Inlet <sup>2</sup>	COD5-10: 1" (2.5 cm) COD30: 1½" (3.8 cm)	2" (5.1 cm)	3" (7.6 cm)	4" (10.2 cm)	6" (15.2 cm)
Outlet <sup>2</sup>	COD5-10: 1" (2.5 cm) COD30: 1½" (3.8 cm)	1½" (3.8 cm) 2" (5.1 cm)	3" (7.6 cm)	4" (10.2 cm)	6" (15.2 cm)
Motor Size	1-5 hp	7.5-10 hp	20 hp	30 hp	40 hp
Pre-Filter Elements	1 - 18" Pre Filter	1	3	4	4
Coalesce Elements	1 x HP538L38-CSB <sup>3</sup>	2 x HP731L39-CB	3 x HP731L39-CB	6 x HP731L39-CB	8 x HP731L39-CB
Separator/ Polish Elements	(combination element)	1 x HP582L30-S25MB	2 x HP582L30-S25MB	3 x HP582L30-S25MB	5 x HP582L30-S25MB
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> 40°F to 104°F (4°C to 40°C)		
Materials of Construction	<b>Housings</b> Carbon steel with industrial coating		<b>Frame</b> Carbon steel with industrial coating	<b>Tray</b> Carbon steel with industrial coating	
Electric Motor	TEFC motors with overload protection				
Pump	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.				
Pump Relief	85-100 psi adjustable				
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $x_{cl} \geq 4000$		<b>Coalesce</b> 100% synthetic fiber media	<b>Separator</b> TEFLON® coated screen (water barrier)	
Fluid Compatibility	Petroleum based fuels, #2 Diesel (standard) and jet fuel. For other fuel options contact factory.				
Hazardous Environment Options	Select special option X for explosion proof unit. Consult factory for exact standards requirements such as Class, Division, and Zone.				

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Female pipe port.

<sup>3</sup>HP538L38-CSV element combines coalesce and separator element functions into a single element.

TEFLON® is a registered trademark of DuPont.

# COD Part Number Builder

**COD**   -  -

Flow Rate      Power Options      Seal      Special Options

Flow Rate <sup>1</sup>	<b>5</b>	5 gpm (18.9 lpm)
	<b>10</b>	10 gpm (37.9 lpm)
	<b>30</b>	30 gpm (114 lpm)
	<b>60</b>	60 gpm (225 lpm)
	<b>100</b>	100 gpm (379 lpm)
	<b>200</b>	200 gpm (757 lpm)
	<b>300</b>	300 gpm (1135 lpm)
	<b>400</b>	400 gpm (1514 lpm)
	<b>500</b>	500 gpm (1892 lpm)
<b>600</b>	600 gpm (2271 lpm)	

Power Options	<b>60 Hz</b>		<b>50 Hz</b>		<b>Non-Powered</b> X <sup>2</sup> Non-powered COD: No pump-motor combination or electrical controls.
	<b>12</b>	120 V ac, 1P	<b>E1</b>	120 V ac, 1P	
	<b>E2</b>	230 V ac, 1P	<b>E3</b>	230 V ac, 1P	
	<b>23</b>	230 V ac, 3P	<b>32</b>	320 V ac, 3P	
	<b>46</b>	460 V ac, 3P	<b>38</b>	380 V ac, 3P	
	<b>57</b>	575 V ac, 3P	<b>41</b>	415 V ac, 3P	
			<b>52</b>	525 V ac, 3P	

Seals	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon

Special Options	<b>8</b>	8" (20 cm) solid wheel upgrade
	<b>A</b> <sup>3</sup>	Auto water drain (manual drain included)
	<b>B</b> <sup>4</sup>	Adjustable coalesce vessel bypass loop
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D</b>	DP Indicator Switch
	<b>K</b>	Sight flow indicator (wheel type)
	<b>L</b>	Lifting eye kit
	<b>M</b>	Water discharge totalizing meter
	<b>O</b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>P</b>	PLC touch screen control (does not include VFD)
	<b>T</b> <sup>3</sup>	Hose kit (suction & return hoses + wands)
	<b>U</b>	50' (15 m) electrical cord with no plug
	<b>V</b>	Inlet Control Valve
<b>X</b>	Explosion proof - must specify standards required	
<b>Y</b>	VFD variable speed motor frequency control	

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Suitable for adding to existing fuel delivery system with existing pressure and flow. Auto water drain option is mechanical.

<sup>3</sup>Recommended option.

<sup>4</sup>Standard option.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# FSLCOD

## Marine and Industrial Diesel Filtration Systems

Remove water and particulate to extend fuel injector life and increase combustion engine fuel efficiency.

Ideal for permanent installation on-board sea vessels and diesel applications requiring compact size restrictions.

Donaldson  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Remove contaminants, protect equipment.

FSLCOD combines high efficiency single pass particulate and water removal to ensure that your fuel is always in spec, eliminating premature injector failures and downtime.




## Elements that go beyond industry standard.

With DFE rated particulate filters and 100% synthetic coalesce/separator elements that remove all free and emulsified water down to 50 ppm, your fuel rail and high pressure injectors will be protected and running more efficiently than ever.

## Small has never been bigger.

Coming in at only 1 ft<sup>2</sup> (30 cm<sup>2</sup>) of floor space and 34" (86 cm) tall, the FSLCOD is engineered to provide maximum efficiency in minimal space.

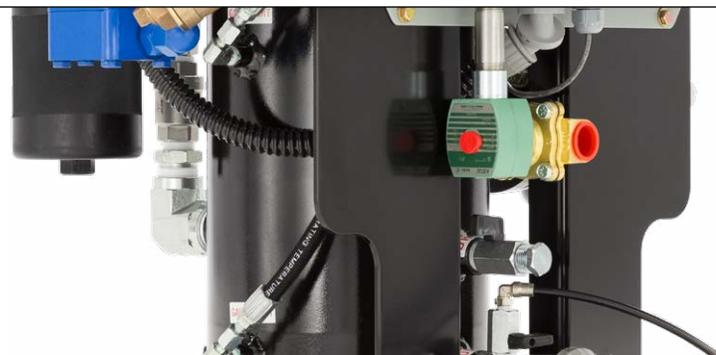

## Smarter filtration.

Designed for 24/7 unattended operation, FSLCODs with auto water drain technologies, available electrically or mechanically powered, provide you with the safety and security to know your diesel is clean and dry even when you're off the clock.

## Increase fuel efficiency, lower emissions.

Cleaner fuel runs more efficiently and with lower emissions, yielding better injector performance and life and leading to lower fuel usage, translating to bottom line profitability and a drastically lower environmental footprint. Monitor your fuels' condition with properly positioned sample ports before the pre-filter and after the coalesce stage and always know how your filtration is performing.



## No detail overlooked.

From the cast iron gear pump with internal relief to the space saving design, every component of the FSLCOD is designed to provide you with the highest quality filtration and integrate seamlessly into your systems. So whether you've got a single vessel or an entire fleet, you can rest assured that your diesel is clean and dry.

# FSLCOD Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 34" (86 cm)	<b>Width</b> 30" (76 cm)	<b>Depth</b> 25" (64 cm)	<b>Approximate Weight</b> 285 lbs (129 kg)
<b>Connections</b>	<b>Inlet</b> FSLCOD5-10: 1" 3-way diverting ball valve FSLCOD20: 1½" female NPT		<b>Outlet</b> 1" female NPT ¼" female NPT	
<b>Element Configuration</b>	<b>Pre-filter</b> HP110NL11-3MV		<b>Main Filter</b> HP538L38-CSV	
<b>Seals</b>	Fluorocarbon			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)		<b>Ambient Temperature</b> 40°F to 104°F (4°C to 40°C)	
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating			
<b>Electric Motor</b>	TEFC, 56-184 frame 1 - 7.5 HP, 900-1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $x_{(c)} \geq 4000$	<b>Coalesce</b> 100% synthetic fiber media	<b>Separator</b> TEFLON <sup>®</sup> coated screen (water barrier)	
<b>Fluid Compatibility</b>	Petroleum based fuels, #2 Diesel (standard). For other fuel options contact factory.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

TEFLON<sup>®</sup> is a registered trademark of DuPont

# FSLCOD Part Number Builder

**FSLCOD**    -

Flow Rate      Indicator      Power Options      Special Options

**Flow Rate\***

<b>5</b>	5 gpm (18.9 lpm)
<b>10<sup>1</sup></b>	10 gpm (37.9 lpm)
<b>20</b>	20 gpm (75.7 lpm)

**ΔP Indicator<sup>2</sup>**

<b>D</b>	22 psid visual gauge + electric switch
<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz, 1750 RPM</b>	<b>50 Hz, 1450 RPM</b>	<b>Pneumatic</b>
	<b>12</b> 120 V ac, 1P	<b>11</b> 110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>22</b> 208-230 V ac, 1P	<b>21</b> 220 V ac, 1P	
	<b>23</b> 208-230 V ac, 3P	<b>40</b> 380-440 V ac, 3P	
	<b>46</b> 460-480 V ac, 3P	<b>52</b> 525 V ac, 3P	
	<b>57</b> 575 V ac, 3P		

**Explosion proof - Class 1, Division 1, Group C+D per NEC 501 – Ready for outdoor use**  
**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

**Special Options**

<b>A1<sup>3</sup></b>	Electrically powered automatic water drain
<b>B</b>	Complete filter bypass line
<b>C</b>	CE marked for machinery safety directive 2006/42/EC
<b>D<sup>4</sup></b>	High filter ΔP auto shutdown
<b>E</b>	100 mesh cast iron basket strainer
<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
<b>G</b>	Spill retention pan with fork guides (industrial coated steel)
<b>J</b>	Add pressure gauge between pump & filter assembly
<b>K</b>	HP75L8-149W Spin-On suction strainer
<b>L</b>	High filter element ΔP indicator light
<b>M</b>	Total system flow meter (120 cSt max)
<b>O<sup>5</sup></b>	On-board PM-1 particle monitor & clean oil indicator light
<b>R<sup>6</sup></b>	Spill Retention Pan With Wheels
<b>S<sup>7</sup></b>	All wetted components 303 or higher stainless steel
<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
<b>W</b>	Automatic air bleed valve
<b>Z</b>	On site start-up training

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.  
<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.  
<sup>3</sup>Coalesce filter only. Particulate filter housing is equipped with pop-up differential indicator.  
<sup>4</sup>Requires Electric Power Option.  
<sup>5</sup>"D & L" Option requires DP Indicator option with electric switch selected (options D,F,H). "D" Option includes "L" option, do not add to part number  
<sup>6</sup>PM-1 will not function properly in the presence of free or emulsified water at or above saturation point. If selected, PM-1 is installed downstream of the filtration. "O" Option includes "J" option, do not add to part number. "O" Option not available with "X\_\_" options  
<sup>7</sup>A opção "R" inclui a opção "G"; não adicione ao número da peça.  
<sup>8</sup>With exception to cast iron gear pump.

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# FCLCOD

## Diesel Conditioning Filter Cart

Remove water and particulate to extend fuel injector life and increase combustion engine fuel efficiency.

Ideal for service oriented stand by diesel tanks and marine applications.

**Donaldson.**  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



## Take control of your systems.

FCLCOD filter carts are constructed to be powerful, dependable, and easy to use. Whether you've got multiple diesel reservoirs or simply need your filtration on the move, conditioning your fuels has never been easier. Add automatic water drain and your FCLCOD becomes a powerhouse that does the work for you.




## Filtration starts with the filter(s).

FCLCOD combines high efficiency single pass particulate and water removal to ensure that your fuel is always in spec, eliminating premature injector failures and downtime. With DFE rated particulate filters and 100% synthetic coalesce/separator elements that remove all free and emulsified water down to 50 ppm, your fuel rail and high pressure injectors will be protected and running more efficiently than ever.

## Never stops working.

Designed for 24/7 unattended operation, FCLCODs with auto water drain technologies, available electrically or mechanically powered, provide you with the safety and security to know your diesel is clean and dry even when you're off the clock.

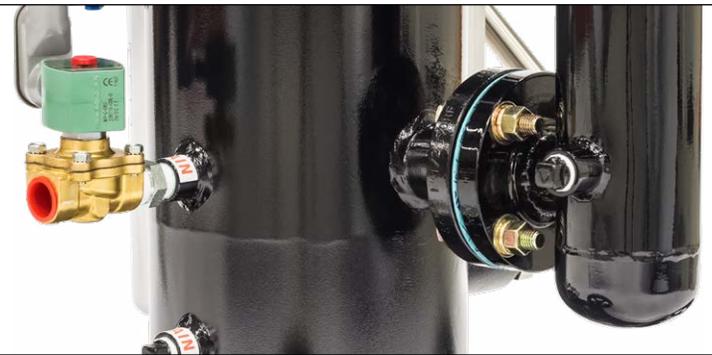

## Unmatched on the move.

Non-shredding wheels, optional off-road heavy duty tires and easy to maneuver cart design with ergonomic handle mean you get powerful filtration exactly when and where you need it.

## Increase fuel efficiency, lower emissions.

Cleaner fuel runs more efficiently and with lower emissions, yielding better injector performance and life and can even lead to lower fuel usage which translates to bottom line profitability and a drastically lower environmental footprint. Monitor your fuel's condition with properly positioned sample ports before the pre-filter and after the coalesce stage and always know how your filtration is performing.



## Completely customizable.

Flexible dimension and process arrangement are available with every FCLCOD so you get the perfect contamination solution for your fuel delivery system. Even choose from explosion proof models and color coordinate to fit perfectly with your existing safety standards for the ultimate mobile system in diesel conditioning.

# FCLCOD Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 62" (158 cm)	<b>Width</b> 30.5"	<b>Depth</b> 29" (74 cm)	<b>Approximate Weight</b> 379 lbs (172 kg)
<b>Connections</b>	<b>Inlet</b> FCLCOD5-FCLCOD10: 1" male JIC (37° flare) FCLCOD20: 1½" male JIC (37° flare)	<b>Outlet</b> FCLCOD5-FCLCOD10: 1" male JIC (37° flare) FCLCOD20: 1¼" male JIC (37° flare)	<b>Hoses</b> FCLCOD5-FCLCOD10: 1" x 10 ft (2.4 m) FCLCOD20: 1¼" x 10 ft (2.4 m)	
<b>Element Configuration</b>	<b>Pre-filter</b> HP110NL11-3MV	<b>Main Filter</b> HP538L38-CSV		
<b>Seals</b>	Fluorocarbon			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> 40°F to 104°F (4°C to 40°C)		
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless steel	
<b>Electric Motor</b>	TEFC, 56-145 frame 1 – 7.5 HP, 900 – 1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.			
<b>Electric Connection</b>	Voltages 230 V ac and under, single phase: 35' (11 m) retractable cord reel included. NEMA 5-15 plug installed on Power Option 12. Voltages over 230 V ac: 35' (11 m) loose cord included.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup> 35' (11 m) retractable air hose included when pneumatic option selected. Replaces 35' (11m) electric cord reel.			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $x_{cl} \geq 4000$	<b>Coalesce</b> 100% synthetic fiber media	<b>Separator</b> TEFLON® coated screen (water barrier)	
<b>Fluid Compatibility</b>	Petroleum based fuels, #2 Diesel (standard). For other fuel options contact factory.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord or cord reel will be included.			


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

TEFLON® is a registered trademark of DuPont.

# FCLCOD Part Number Builder

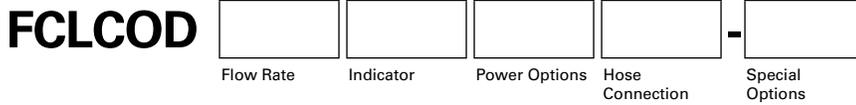

<b>Flow Rate<sup>1</sup></b>	<b>5</b>	5 gpm (18.9 lpm)
	<b>10<sup>2</sup></b>	10 gpm (37.9 lpm)
	<b>20</b>	20 gpm (75.7 lpm)

<b>ΔP Indicator<sup>3</sup></b>	<b>D</b>	22 psid visual gauge + electric switch
	<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz, 1750 RPM</b>		<b>50 Hz, 1450 RPM</b>		<b>Pneumatic 00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
	<b>57</b>	575 V ac, 3P			

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**  
**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Hose Connection</b>	<b>G</b>	Female BSPP swivel hose ends, no wands
	<b>S</b>	Female JIC swivel hose ends, no wands
	<b>W</b>	Female JIC swivel hose ends, with wands

<b>Special Options</b>	<b>A1</b>	Electrically powered automatic water drain
	<b>B</b>	Complete filter bypass line
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D<sup>4</sup></b>	High filter ΔP auto shutdown
	<b>E</b>	100 mesh cast iron basket strainer
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
	<b>G</b>	Spill retention pan with fork guides (industrial coated steel)
	<b>H1</b>	10' (3 m) return line hose extension
	<b>H2</b>	20' (6 m) return line hose extension
	<b>J</b>	Add pressure gauge between pump & filter assembly
	<b>K</b>	HP75L8-149W Spin-On suction strainer
	<b>L</b>	High filter element ΔP indicator light
	<b>M</b>	Total system flow meter (120 cSt max)
	<b>O<sup>5</sup></b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>R<sup>6</sup></b>	Spill retention pan with wheels (industrial coated steel)
	<b>S<sup>7</sup></b>	All wetted components 303 or higher stainless steel
	<b>T</b>	Foam filled off-road tires for rugged environment
	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
<b>W</b>	Automatic air bleed valve	
<b>Z</b>	On site start-up training	

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.  
<sup>2</sup>Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.  
<sup>3</sup>Coalesce filter only. Particulate filter housing is equipped with sliding differential indicator.  
<sup>4</sup>"D & L" Option requires DP Indicator option with electric switch selected (options D,F,H). "D" Option includes "L" option, do not add to part number  
<sup>5</sup>PM-1 will not function properly in the presence of free or emulsified water at or above saturation point. If selected, PM-1 is installed downstream of the filtration. "O" Option includes "J" option, do not add to part number. "O" Option not available with "X\_\_" options.  
<sup>6</sup>"R" Option includes "G" option, do not add to part number.  
<sup>7</sup>With exception to cast iron gear pump.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# CSD

## Diesel Coalesce Non-Powered Filtration System

Remove water to extend fuel injector life and increase combustion fuel efficiency. The CSD is designed for direct integration into fuel delivery systems with pump flow and pressure already in place for easy, streamlined water removal through your existing system. Using high efficiency coalesce and separating media, the CSD will keep diesel free from water contamination down to 50 ppm in a single pass.

Ideal for construction fueling depots, tank farms and common fuel rail applications.

**Donaldson**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Protect your uptime.

By removing water from your diesel systems, you're providing the best environment for your equipment to operate efficiently and helping to prevent breakdowns and damage, saving you time and effort. CSD systems rapidly remove water down to saturation point, protecting your systems and letting you focus on the job at hand.



## Media matters.

Cellulose media is known to break down under high water content, resulting in media migration and loss of coalescence efficiency. CSD's 100% synthetic coalesce and separator elements contain no cellulose and feature a pleated synthetic configuration to maximize surface area and ensure your fuel rail and high pressure injectors will be protected and running more efficiently than ever.

## Don't quit your day job.

Designed for 24/7 unattended operation, CSDs with auto water drain technologies, available mechanically or electrically powered, provide you with the safety and security to know your diesel is clean and dry so you can forget worrying about your filtration and focus on the job at hand.



## Setting the new standard.

Sampling and preventative maintenance are no longer optional, they're a necessity. Knowing your diesel is clean is the first step in prolonging the life of your fuel injectors and critical components. CSD series housings come standard with easy-to-access sample ports in their proper positions so you can always know you're putting clean, dry diesel into your systems.

## Combined filtration, double the power.

A properly sized Donaldson Hy-Pro CSD plus Donaldson Hy-Pro high efficiency particulate filtration will deliver diesel fuel cleanliness codes of 15/13/10 and better while maintaining water levels at 50 ppm. Pair your CSD with an LF housing in-line on your system and rest assured knowing your fuel injectors are protected.



## Integrated results.

Installing CSDs in-line on your current system means you get powerful filtration exactly where you need it – directly upstream of your critical components. With standard models ranging up to 600 gpm, your diesel will be dry and components protected whether you're on a small diesel tank farm or a massive diesel fired turbine.

# CSD Specifications


Model	CSD30	CSD120	CSD200	CSD400	CSD600
Max Flow Rate	30 gpm (114 lpm)	120 gpm (454 lpm)	200 gpm (757 lpm)	400 gpm (1514 lpm)	600 gpm (2271 lpm)
Approximate Weight <sup>1</sup>	164 lbs (74 kg)	319 lbs (177 kg)	546 lbs (248 kg)	1097 lbs (498 kg)	1155 lbs (524 kg)
Height <sup>1</sup>	62" (158 cm)	74" (188 cm)	82" (209 cm)	82" (209 cm)	82" (209 cm)
Width <sup>1</sup>	22" (56 cm)	32" (82 cm)	36" (92 cm)	48" (122 cm)	48" (122 cm)
Length <sup>1</sup>	22" (56 cm)	27" (69 cm)	32" (82 cm)	40" (102 cm)	40" (102 cm)
Coalesce Elements	1 x HP538L38-CSV <sup>2</sup>	2 x HP731L39-CV	3 x HP731L39-CV	6 x HP731L39-CV	8 x HP731L39-CV
Separator/ Polish Elements	(combination element)	1 x HP582L30-S25MV	2 x HP582L30-S25MV	3 x HP582L30-S25MV	5 x HP582L30-S25MV
Materials of Construction	<b>Housing</b> Industrial coated steel	<b>Tray</b> Industrial coated steel	<b>Hoses</b> Reinforced synthetic		
Media Description	<b>Coalesce</b> 100% synthetic fiber media		<b>Separator</b> TEFLON <sup>®</sup> coated screen (water barrier)		
Fluid Compatibility	Petroleum based fuels, #2 Diesel (standard). For other fuel options contact factory.				

<sup>1</sup>Weights and dimensions are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>HP538L38-CSV element combines coalesce and separator element functions into a single element.

TEFLON<sup>®</sup> is a registered trademark of DuPont.

# CSD Part Number Builder

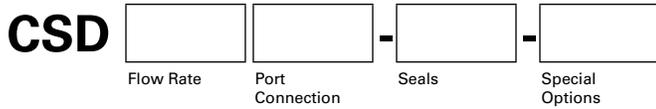

Flow Rate <sup>1</sup>	
<b>30</b>	30 gpm (114 lpm)
<b>120</b>	120 gpm (454 lpm)
<b>200</b>	200 gpm (757 lpm)
<b>400</b>	400 gpm (1514 lpm)
<b>600</b>	600 gpm (2271 lpm)

Port Connections	Connection Type	CSD Series Availability
<b>B2</b>	2" BSPP	30-120
<b>C2</b>	2" SAE Code 61 flange	30-120
<b>C3</b>	3" SAE Code 61 flange	30-120
<b>D2</b>	DN50 DIN flange	30-120
<b>D3</b>	DN65 DIN flange	30-120
<b>D4</b>	DN100 DIN flange	200-400
<b>D5</b>	DN125 DIN flange	200-400
<b>D6</b>	DN150 DIN flange	200-400
<b>D8</b>	DN200 DIN flange	200-600
<b>D10</b>	DN250 DIN flange	200-600
<b>F2</b>	2" ANSI flange	30-120
<b>F3</b>	3" ANSI flange	30-120
<b>F4</b>	4" ANSI flange	200-400
<b>F6</b>	6" ANSI flange	200-600
<b>F8</b>	8" ANSI flange	200-600
<b>F10</b>	10" ANSI flange	200-600
<b>F12</b>	12" ANSI flange	200-600
<b>N2</b>	2" NPT	30-120

Seals	
<b>B</b>	Nitrile (Buna) <sup>1</sup>
<b>V</b>	Fluorocarbon

Special Options	
<b>AX</b>	Auto water drain - mechanical (no electrical) <sup>2</sup>
<b>AE</b>	Auto water drain - electrically operated solenoid valve (120 V ac, 1P, 60Hz <sup>3</sup> )
<b>AE1</b>	Auto water drain - electrically operated solenoid valve (110 V ac, 1P, 50Hz <sup>3</sup> )
<b>AE2</b>	Auto water drain - electrically operated solenoid valve (230 V ac, 1P, 60Hz <sup>3</sup> )
<b>AE3</b>	Auto water drain - electrically operated solenoid valve (220 V ac, 1P, 50Hz <sup>3</sup> )
<b>B</b>	Auto air bleed valve <sup>4</sup>
<b>M</b>	Water discharge totalizing meter
<b>S</b>	All wetted components 303 or higher stainless steel
<b>T</b>	Optional drip tray + fork life guides

<sup>1</sup>Not suitable for bio diesel.

<sup>2</sup>Suitable for adding to existing fuel delivery system with existing pressure and flow. Auto water drain option is mechanical.

<sup>3</sup>Requires power supply.

<sup>4</sup>Recommended options.

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# What is Varnish?

## Varnish formation

Lubricant varnish is defined per ASTM D02.C01 WK27308 as a thin, hard, lustrous, oil-insoluble deposit, composed primarily of organic residue, and most readily definable by color intensity. It is not easily removed by wiping with a clean, dry, soft, lint-free wiping material and is resistant to saturated (light hydrocarbon) solvents. Its color may vary, but it usually appears in gray, brown, or amber hues. Varnish begins its life as a soluble degradation product before converting to an insoluble particulate form. The process responsible for the deposition of particulate varnish is reversible.

## Lubricant solvency

Under normal operating conditions, turbine lubricants are subjected to oxidation, which produces polar molecules, the varnish precursors, from lubricant mineral-oil base stocks. These polar species represent the starting point of the varnish life cycle. As a result, lubricants in service are a complex combination of base stocks, additives, and contaminants.

A lubricant's solvency is defined as its ability to dissolve these distinct components. Everything in the oil has a finite solubility which is affected by numerous variables (molecular polarity, contaminant levels, temperature, etc). When the solubility of a molecule is low, the lubricant cannot dissolve those components which then release from the fluid to form deposits. However, when the solubility of a molecule is high, the lubricant will have a high capacity to dissolve it, avoiding the formation of varnish deposits.

## Contaminant levels


As the oil degrades and oxidation products accumulate, the solvency of the fluid decreases accordingly. Beyond the saturation point, the fluid can no longer dissolve additional varnish precursors formed by continuing oxidation and varnish will begin to precipitate from the solution.

## Temperature

Oil temperature directly affects the solubilities of all the species dissolved within it. As temperature decreases, so too does the solubility of varnish and its precursors. Because metals are more polar than the lubricant's base stock, the precipitated polar varnishes prefer to adhere to the metal and form potentially damaging deposits. When the level of varnish precursors in a lubricant is at (or near) the fluid's saturation point, varnishing in cooler regions is very likely to occur.

## Types of varnish

The images below depict four different formations of varnish as they can appear in different types and locations throughout a lube system. While this list is not comprehensive, the types listed below are among the most commonly seen.



Varnish can be soft and gooey (Sludge)



Varnish can be hard and brittle (Lacquer)



Varnish on reservoir ceiling (Stalactites)



Varnish deposits on reservoir floor (Plated)

## Testing for varnish

Varnishing can cause costly turbine downtime. An easy solution to combat this is to determine the lubricant's potential for varnish formation. Two of the most widely adopted techniques are QSA<sup>®</sup> (quantitative spectrophotometric analysis) and the standardized MPC (membrane patch colorimetry, ASTM 7843).

Both methods can produce results which vary significantly depending upon the length of time during which the oil sample was "aged." Indeed, longer sample aging periods produce higher MPC values, suggesting that degradation of lubricants continues in the sample bottle. For this reason, the ASTM MPC method suggests all samples be incubated at room temperature for 72 hours after being heated to 140°F (60°C) for 24 hours. This well-defined and standardized aging time has provided inter-laboratory consistency and improved testing repeatability.

# The Varnish Cycle

## It all starts with oxidation.


Oxidation is an unavoidable chemical reaction between the lubricant base stock and oxygen present in the air surrounding it. Oxidation increases as the operating temperature rises, but the by-products remain dissolved.

When oil moves from hotter regions within the system to cooler ones, the fluid temperature decreases and these precursors begin a physical change to precipitate from solution in the form of soft particulates.


Once formed, varnish particles agglomerate and form deposits which preferentially coat metal surfaces within the reservoir and on components like valves. These deposits are often the cause of unit trips and fail-to-start conditions.

In most cases, however, once varnish deposits form, they can be reabsorbed into the fluid and broken down if the solvency of the lubricant increases.

The table below breaks down the stages in the process of varnish formation along with the approximate fluid color corresponding to each stage.

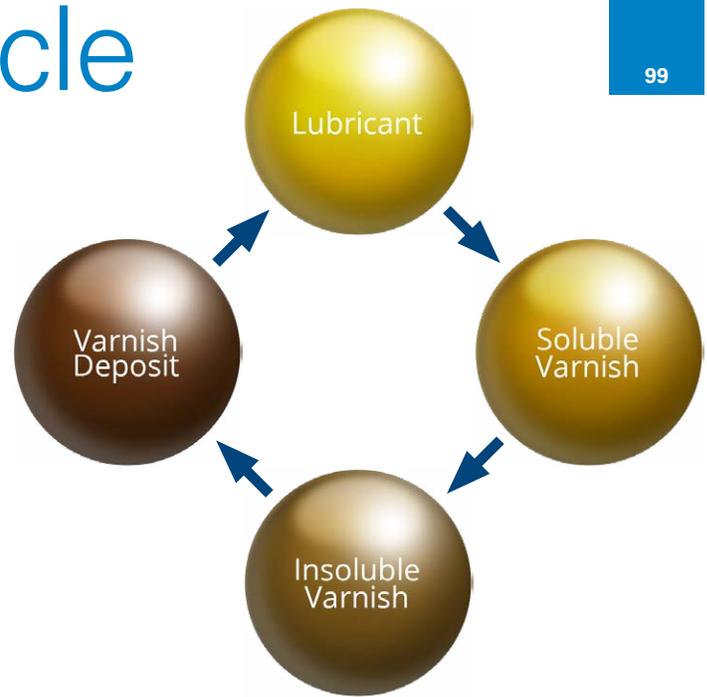

 <p>Oxidation</p>	<p><b>Oxidation</b> is the root cause of the problem. It creates free radicals resulting in acids, alcohols, esters and lactones. Anti-oxidant (A0) additives are designed to neutralize the products of oxidation. As oxidation occurs, the phenol and amine additives are depleted. The products of oxidation become the building blocks of varnish.</p>
 <p>Polymerization</p>	<p><b>Polymerization</b> occurs as the by-products of oxidation and additive reactions combine to create longer chain molecules with higher molecular weight. These molecules have lower solubility and are polarized. The rate of molecular polymerization is a function of temperature (as a catalyst) and the concentration of oxidation by-products (free radicals).</p>
 <p>Solvency</p>	<p><b>Solvency</b> describes fluid's capacity to hold the varnish producing molecules in solution (dissolved). Solubility is directly affected by temperature. As more oxidation by-products are generated, the fluid approaches its solubility saturation point beyond which no additional polymerized molecules can be held in solution.</p>
 <p>Precipitation</p>	<p><b>Precipitation</b> occurs once the solubility threshold (saturation point) has been crossed or if there is a drop in temperature which reduces the solubility of the fluid. As additional oxidation by-products (free radicals) are generated, they become insoluble and precipitate out and are free to form varnish deposits.</p>
 <p>Agglomeration</p>	<p><b>Agglomeration</b> begins as insoluble sub-micron soft particles (~0.08 micron) that have precipitated out of solution bond to form large particles (1.0 micron). These agglomerated soft particles remain insoluble, remain polarized, and maintain a higher molecular weight than the fluid itself.</p>
 <p>Varnish Formation</p>	<p><b>Varnish forms</b> as the polarized oxidation by-products come out of solution, agglomerate and collect on metal surfaces. The surfaces where varnish typically forms include cool zones, low flow and low clearance areas. Why? This is where solubility diminishes, precipitation starts and agglomeration goes on undisturbed. Deposit formation also occurs locally in the reservoir and on components where hot spots in the fluid or sparking lead to varnish, such as on reservoir walls and filter elements.</p>

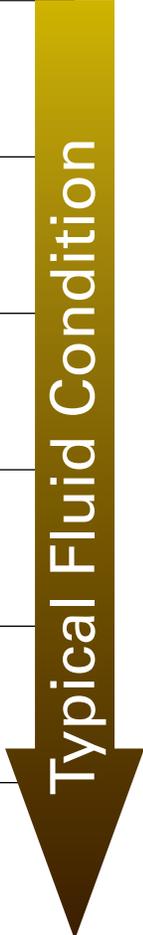

# Strategies to Combat Varnishing

**There are two main types of varnish removal systems: those based upon the removal of suspended (insoluble) particles and those based upon the removal of soluble varnish and its precursors.**

Anti-oxidant packages, generally consisting of phenols and amines, are usually added to the lubricant as a built-in varnish mitigation strategy. Anti-oxidants limit the rate of oxidative degradation and, therefore, delay varnishing. But these AO packages fail in that they cannot prevent it indefinitely. Although both phenols and amines have anti-oxidant activity on their own, they function more efficiently in concert with one another. While the specific identities and amounts of the anti-oxidants employed varies with different lubricant formulations, the mechanism by which they enhance fluid lifetime remains the same. AO levels deplete continuously which means the fluid needs to be replaced once all AO additives have been consumed.

## Insoluble Varnish Removal

Charge agglomeration, electrostatic oil cleaning, or combinations of these techniques are advanced forms of particulate removal. These techniques remove fine particulates that are suspended within the fluid including insoluble varnish particles. However, these technologies are only helpful once the insoluble particles form. Soluble varnish and soluble varnish precursors are able to return to the turbine and become varnish deposits as seen on the components to the right.


Varnish deposits on filter element (GE Frame 6B)




IGV valves and fuel control valves are typically the first problem components



Varnish on load gear (Frame 6)

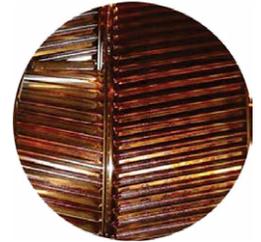

Lube oil reservoir coated (Varnish Deposits)

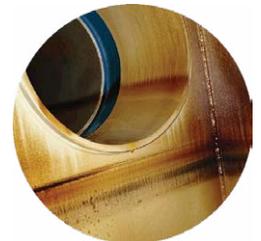

Filter element cross section (Lacquer Varnish Deposits, Support Tube)



# Varnish & Acid Scavenging Systems

## FSTO

Turbine Oil Varnish Removal Systems



106 A total solution for varnish deposit removal and prevention in mineral based and specified synthetic compressor and small frame turbine lube oil applications subject to varnish deposits in bearings, heat exchangers and control valves. Ionic Charged Bonding media technology treats lube oil on a molecular level, reversing the chemical process of varnish deposit formation, improving servo valve response time, protecting lube oil anti-oxidant additive package, removing acids to improve oxidative stability, and improving oil demulsibility. VTM post-filter media removes insoluble (suspended) oxidation by-products, water, and hard contamination to achieve incredibly low ISO Codes and clean lube oil.

## FSA

Phosphate Ester Varnish Removal Systems



110 A dedicated solution for phosphate ester based fluids on turbine control, steel mill hydraulics and other high heat applications. Ionic Charged Bonding media removes acids formed in phosphate ester (hydrolysis) and dissolved metals leached into the fluid from Fuller's earth, D-earth and Selexsorb acid remediation technologies which lead to gels, deposits and poor air release in FRFs. Ionic Charged Bonding Filter Elements also restores fluid resistivity and removes gels and deposits in control valves to improve servo valve response time. VTM mechanical filter element media reduces ISO Codes and extends pump discharge, servo pilot and last chance filter element life. Use FSAPE to avoid unit trip, expensive premature fluid replacement, flushes or bleed and feed routines.

## FSJL

Aeroderivative Jet Lube Varnish Removal Systems



114 Aeroderivative turbines suffer from contamination related variable geometry failures, bearing deposits and premature fluid replacement, all of which can be caused by varnish. Ionic Charged Bonding media technology removes acids, molecular by-products, and varnish deposits that form during jet lube fluid degradation. VTM mechanical filter element media reduces ISO Codes and extends pump discharge, servo pilot and last chance filter element life. FSL is a total fluid management solution for aeroderivative turbine jet lube applications.

## ICB

Ionic Charged Bonding Filter Elements



122 Ionic Charged Bonding (ICB) media is used to treat a range of fluids at the molecular level by removing contaminant molecules that form as a by-product of oxidation and fluid degradation. The heavy weight molecules to be removed are polar oxides, acids and other free radicals that result in deposit formation (varnish) and are detrimental to fluid performance. Ionic Charged Bonding media is designed to selectively remove the contaminant without removing fluid additives. The use of Ionic Charged Bonding results in fluids that perform better, last longer and yield trouble-free operation for those who are responsible for maintaining them. We apply fluid specific Ionic Charged Bonding media that remove acids, dissolved metals and varnish while improving important fluid characteristics such as solubility, resistivity and demulsibility.

## VTM

Particulate, Water, and Oxidation By-product Removal Media



VTM media configuration is a combination of technologies that mechanically removes insoluble (suspended) oxidation by-products that form varnish deposits in additized AW hydraulic oils and EP gear lubricants. VTM adsorbs water and some polar molecules while removing particulate contamination to  $\beta_{0.9_{[C]}} > 4000$ . Ideal for high heat hydraulic and gearbox lube applications such as plastic injection molding, wind turbine, or coal mill applications. VTM is available in FSW, FSL, and FCL dedicated and portable off-line systems.

# FSTO

## Turbine Oil Varnish Removal Systems

FSTO is the complete oil conditioning solution for turbine and compressor lube oil. Turbine Oil Varnish Removal Systems treats both soluble and insoluble forms of oxidation by-products to remove and prevent varnish deposits and deliver guaranteed results.

Utilizing ICB's patented ion-exchange resin technology, Turbine Oil Varnish Removal Systems removes the soluble varnish feedstock, acids and protects the anti-oxidant additive package while VTM high efficiency post filter removes insoluble by-products and will deliver unimaginably low ISO cleanliness codes so you can use your clean, in-service oil longer than ever before.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



Powered by EPT Clean Oil's patented ICB® ion-exchange filters

\*Please check with your DHP distributor on availability.

## Sized just right.

Not every job calls for a Goliath sized solution. When it comes to small turbine lube oil and compressor reservoirs with contamination problems, the Turbine Oil Varnish Removal Systems is sized just right. Sizing and flow rate options mean you get the perfect solution tailored specifically to your systems.



## Reverse varnish formation.

Even before MPC values climb, trending acid number can be a leading indicator of trouble ahead. By removing oxidation by-products, Turbine Oil Varnish Removal Systems restores the solubility of your oil which in turn chemically removes varnish deposits in your system. The continuous process goes even further by removing the acids from your system on a molecular level, meaning you're free and clear of varnish and its underlying causes.

## Continuous varnish control.

Combined VTM and ICB technologies continuously remove soluble and insoluble oxidation by-products so that your turbines operate uninhibited by varnish. With the added benefits of increasing the lifespan of AO packages, implementing the Turbine Oil Varnish Removal Systems to your filtration regime will make unit trips and unplanned downtime a thing of the past.



## ISO Codes: right on target.

The same ultra-high efficiency particulate filter which removes insoluble oxidation by-products doubles up to deliver incredibly low ISO Codes and take the pressure off your on-board bearing lube, pump discharge, and servo filters, giving you an extension on the lifespans of both your oil and your critical components.

## Extend your oil life.

Turbine Oil Varnish Removal Systems prevents AO additive depletion, removes acids which negatively affect oxidative stability, and can even improve oil demulsibility to greatly extend the useful life of your oil. Every Turbine Oil Varnish Removal Systems comes standard with sample ports in the right locations to arm you with access to consistently accurate and best practice samples.



## A league of its own.

ICB is used on over 400 turbine and compressor packages achieving over 40 million hours of operating experience. No other product in the market can match track record or experience level. ROI in a Frame 7ea Gas Turbine has been calculated at \$170,000 per year on a \$8000 average annual investment on lubricant maintenance.



# FSTO Specifications


<b>Dimensions<sup>1</sup></b>	<b>FSTO05-FSTO5</b> <b>FSTO10</b>	<b>Height</b> 72" (183 cm) 72" (183 cm)	<b>Length<sup>2</sup></b> 47.5" (121 cm) 70" (178 cm)	<b>Width<sup>2</sup></b> 31.5" (80 cm) 31.5" (80 cm)	<b>Approximate Weight</b> 585 lbs (265 kg) 1000 lbs (454 kg)
<b>Connections</b>	<b>FSTO05-FSTO5</b> <b>FSTO10</b>	<b>Inlet</b> 1" FNPT with ball valve 1.5" FNPT with ball valve	<b>Outlet</b> 1" FNPT with ball valve 1" FNPT with ball valve		
<b>Max Reservoir Size</b>	<b>FSTO05</b> 600 gal (2,271 liters)	<b>FSTO1</b> 1,200 gal (4,542 liters)	<b>FSTO2</b> 4,000 gal (15,000 liters)	<b>FSTO5</b> 8,000 gal (30,000 liters)	<b>FSTO10</b> 16,000 gal (60,566 liters)
<b>Element Configuration</b>	<b>Particulate + Insoluble Filter</b> HP107L18-VTM710-C-V		<b>ICB</b> FSTO05: ICB600504-V FSTO1: ICB600504-V x 2 FSTO2: ICB600524 -V FSTO5: ICB600524-V x 2 FSTO10: ICB600524-V x 4		
<b>Seals</b>	Fluorocarbon + silicone				
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 86°F to 176°F (30°C to 80°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)		
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating		<b>Tray</b> Carbon steel with industrial coating		
<b>Electric Motor</b>	TEFC, 56-182T frame 0.5 – 1.5HP, 900 – 1750 RPM				
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.				
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.				
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar)				
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>				
<b>Media Description</b>	<b>VTM</b> β <sub>0.9(c)</sub> ≥ 4000 particulate, insoluble oxidation by-product and water removal media.		<b>ICB</b> Patented ion-exchange resin media for molecular removal of acids, varnish deposits, soluble oxidation by-products and dissolved metal ions from mineral based turbine oil.		
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids only (standard). For phosphate ester and other specified synthetic fluids, see FSA (page 108) or contact factory.				
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements.				

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Spill retention pan standard size. Consult factory for custom pan sizing.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

# FSTO Part Number Builder

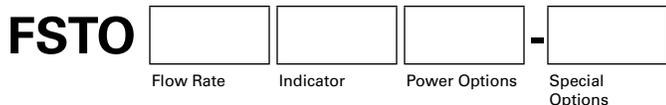

<b>Flow Rate<sup>1</sup></b>	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>5</b>	5 gpm (18.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>10</b>	10 gpm (37.9 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

<b>ΔP Indicator<sup>2</sup></b>	<b>D</b>	22 psid visual gauge + electric switch
	<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b>
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & Flow meter included.
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
<b>57</b>	575 V ac, 3P				

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**  
**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Special Options</b>	<b>A</b>	Air cooled heat exchanger (consult factory)
	<b>B</b>	Complete filter bypass line
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D<sup>3</sup></b>	High filter ΔP auto shutdown
	<b>E</b>	100 mesh cast iron basket strainer
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
	<b>H</b>	Automatic high temp shut down (160°F, 71°C)
	<b>L<sup>3</sup></b>	High filter element ΔP indicator light
	<b>M</b>	Total system flow meter (120 cSt max)
	<b>O</b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>S<sup>4</sup></b>	All wetted components 303 or higher stainless steel
	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>V</b>	Lifting eye kit
<b>W</b>	Automatic air bleed valve	
<b>Z</b>	On site start-up training	

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.  
<sup>2</sup>Particulate filter only. ICB housing is equipped with 0-160 psi static pressure gauge. Industrial, liquid filled.  
<sup>3</sup>Requires ΔP Indicator option "D" selected.  
<sup>4</sup>With exception to cast iron gear pump.

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# FSA

## Phosphate Ester Varnish Removal Systems

A complete solution for trouble-free EHC operation using phosphate ester fluids. Avoid premature fluid replacement, bleed and feed, and eliminate expensive flushes. Phosphate Ester Varnish Removal Systems is the new standard for maintenance of water, acid, ISO Code, resistivity, and removal of gels and deposits that cause servo valve failure.

Ideal for steam turbine EHC fire resistant fluid maintenance.

Donaldson.  
HY-PRO™


[hyprofiltration.com/](http://hyprofiltration.com/)



Powered by EPT Clean Oil's patented ICB® ion-exchange filters  
\*Please check with your DHP distributor on availability.

## Resolve servo valve issues.

Phosphate Ester Varnish Removal Systems skids featuring ICB® technology will maintain ideal fluid chemistry and cleanliness. Systems will reduce elevated Acid Number and water, increase resistivity and eliminate the cause of fluid gelling and servo valve sticking.

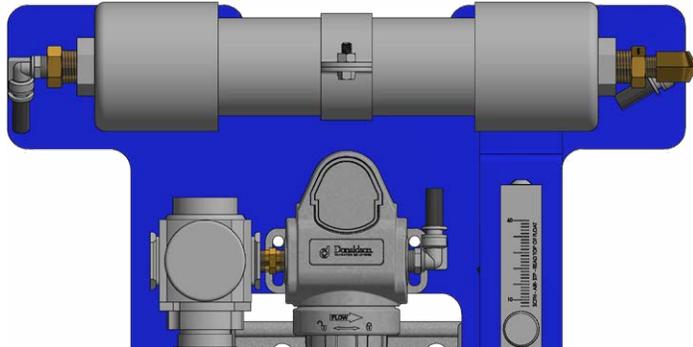


## Clean, dry, healthy oil.

Water and phosphate ester together form strong acid which leads to premature fluid replacement. Integrated Headspace Dehydrators continuously introduce nitrogen through the headspace to simultaneously remove water, O<sub>2</sub>, CO, H and other high temperature breakdown gases. Maintaining low water levels and eliminating reservoir contact with O<sub>2</sub> will proactively manage the rate of fluid breakdown and minimize acid production.

## Minimize acid. Maximize efficiency.

High acid number (AN) in phosphate ester means premature fluid replacement if left unmanaged. Since acid production is autocatalytic, the acid in your system will generate more acid until your fluid becomes unusable. ICB technology can reduce AN to as low as 0.03 with 4-8x the capacity of other acid removal filters.

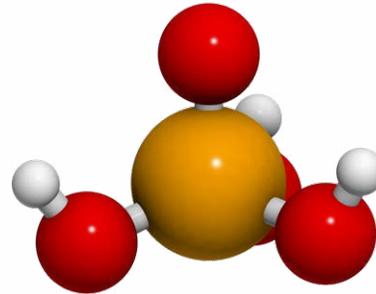


## Remove what others left behind.

Dissolved metal ions in phosphate ester form gels and deposits that accumulate on servo valve nozzles & flappers, resulting in slow servo valve response time, unit trips, and reduced fluid resistivity. ICB removes all dissolved metal, reverses gel and deposit formation, prevents unit trip and restores servo valve response time.

## Extend your oil life, don't flush it.

Low resistivity in phosphate ester leads to electro-kinetic corrosion between dissimilar metal surfaces and is one of the condemning factors of phosphate ester. In addition to removing acids and dissolved metals, ICB has been shown to significantly increase fluid resistivity to prevent premature fluid replacement, expensive bleed-and-feed routines and unnecessary chemical flushes.

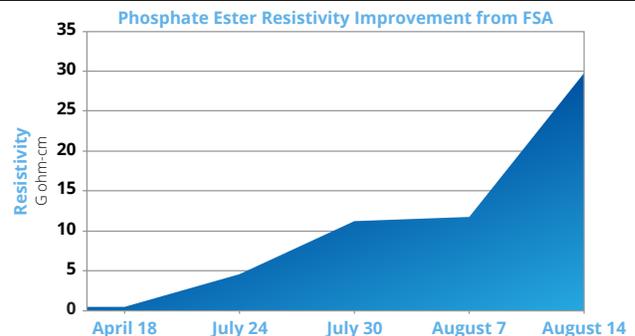

## Comprehensive EHC protection.

In addition to Phosphate Ester Varnish Removal Systems we offer these important companion products that eliminate common weak points in EHC fluid maintenance. Dynafuzz stainless steel filters to eliminate the common issues of high pressure filter fiber migration and static discharge, restore fluid color and to reduce patch weight, and VTM to upgrade existing low pressure filters.

# FSA Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 58" (147 cm)	<b>Length<sup>2</sup></b> 47.5" (121 cm)	<b>Width<sup>2</sup></b> 31.5" (80 cm)	<b>Approximate Weight</b> 571 lbs (259 kg)
<b>Connections</b>	<b>Inlet</b> 1" FNPT with locking ball valve		<b>Outlet</b> 1" FNPT with locking ball valve	
<b>Max Reservoir Size</b>	<b>FSA05</b> 200 gal (750 liters)	<b>FSA1</b> 400 gal (1,500 liters)	<b>FSA2</b> 800 gal (3,000 liters)	<b>FSA4</b> 1,600 gal (6,050 liters)
<b>Element Configuration</b>	<b>Particulate filter</b> HP107L18-VTM710-C-V		<b>ICB</b> FSA05: ICB600504-A FSA1: ICB 600504-A x 2 FSA2: ICB600524-A FSA4: ICB600524-A x 2	
<b>Seals</b>	Fluorocarbon + silicone			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 86°F to 176°F (30°C to 80°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)	
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating		<b>Tray</b> Carbon steel with industrial coating	
<b>Electric Motor</b>	TEFC, 56-145 frame 0.5 – 1 HP, 900 – 1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP65, aluminum enclosure with short circuit and overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar)			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>3</sup>			
<b>Media Description</b>	<b>VTM</b> β <sub>0.9</sub> <sub>(C)</sub> ≥ 4000 particulate, insoluble oxidation by-product and water removal media.		<b>ICB®</b> Ion charge bonding resin media for molecular removal of acids, gels and deposits, oxidation by-products and dissolved metal ions from phosphate ester and other synthetic fluids.	
<b>Fluid Compatibility</b>	EHC Fire resistant hydraulic fluids (phosphate ester). For polyol ester and other specified synthetics contact factory.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Spill retention pan standard size. Consult factory for custom pan sizing.

<sup>3</sup>Air consumption values are estimated maximums and will vary with regulator setting.

# FSA Part Number Builder



<b>Fluid Type</b>	<b>BS</b>	BioSyn <sup>1</sup>
	<b>PE</b>	Phosphate Ester (not compatible with Skydrol) <sup>1</sup>
	<b>SK</b>	Skydrol <sup>1</sup>

<b>Flow Rate</b> <sup>2</sup>	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>4</b>	4 gpm (15.1 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

<b>ΔP Indicator</b> <sup>3</sup>	<b>D</b>	22 psid visual gauge + electric switch
	<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b> <b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
	<b>57</b>	575 V ac, 3P			

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**

**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Special Options</b>	<b>A</b>	Air cooled heat exchanger (consult factory)
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D</b> <sup>4</sup>	High filter ΔP auto shutdown
	<b>E</b>	100 mesh cast iron basket strainer
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
	<b>H</b>	Automatic high temp shut down (160°F, 71°C)
	<b>L</b>	High filter element ΔP indicator light
	<b>M</b>	Total system flow meter (120 cSt max)
	<b>O</b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>S</b>	All wetted components 303 or higher stainless steel <sup>5</sup>
	<b>T3</b>	Remove reservoir headspace dehydrator
	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>V</b>	Lifting eye kit
<b>W</b>	Automatic air bleed valve	
<b>Z</b>	On site start-up training	

<sup>1</sup>Consult factory for additional fluid type information.

<sup>2</sup>Nominal flow rate at 60 Hz motor speeds.

<sup>3</sup>Particulate filter only. ICB housing is equipped with 0-160 psi static pressure gauge. Industrial, liquid filled.

<sup>4</sup>"D" Option required DP Indicator option with electric switch to be selected ("D").

<sup>5</sup>With exception to cast iron gear pump.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# FSJL

## Aeroderivative Jet Lube Varnish Removal Systems

FSJL fluid conditioning skids are a total solution for managing aeroderivative jet lube oils susceptible to high thermal oxidative stress and coke deposit formation. Aeroderivative Jet Lube Varnish Removal Systems prevents and reduces coke deposits that lead to variable geometry failures. Extend useful fluid life by removing the catalysts for oxidation; O<sub>2</sub> contact, acid, oxidative coking precursors, dissolved metals, combustible gases, water, and varnish all while maintaining low ISO Codes. Specifically designed for MIL-L-23699 aeroderivative jet lube oils, the Aeroderivative Jet Lube Varnish Removal Systems eliminates the contamination that leads to variable geometry failures.

Ideal for maintenance of aeroderivative jet lube oil and hydraulic systems.

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



Powered by EPT Clean Oil's patented ICB® ion-exchange filters

\*Please check with your DHP distributor on availability.

## Prevent coking deposits.

Mechanical wear, oil flow restrictions, and increased operating temperature are all caused by coking deposits, the major cause of premature failure in aeroderivative oils. ICB's patented ion-exchange resin technology removes the oxidation by-products before they can cause additive depletion and coking deposits that form on the turbine rotor, bearings and other wetted surfaces.




## Remove acids & dissolved metals.

Aeroderivative turbines often operate at elevated Acid Number (AN) values which attack metal surfaces, adding dissolved metals into the lubricant. Ion-Exchange technology removes acids and metals, keeping rates of breakdown at a minimum while eliminating the feedstock that leads to coke formation.

## High efficiency filtration.

The Aeroderivative Jet Lube Varnish Removal Systems high efficiency final filter removes particles and insoluble by-products, delivering unimaginably low ISO Codes to extend the life of your mechanical components and bearings. To top it off, every HP107 filter element comes with an integral bypass valve to give you the safety and security you want with the filtration power you need.

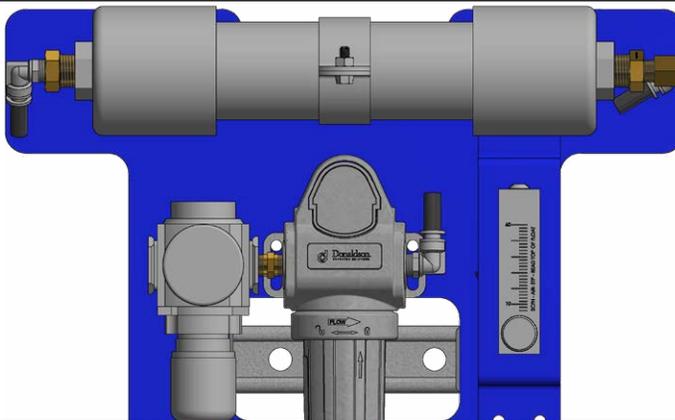

## Actively manage oxidation.

Normal lubricant reservoirs are vented to atmosphere, the key ingress pathway for water and oxygen which are two major causes of jet lube breakdown. The integrated headspace dehydrator on every Aeroderivative Jet Lube Varnish Removal Systems actively blankets the reservoir with dry nitrogen to remove water, oxygen and combustible gases and greatly reduce the rate of oxidation and extend your fluid's useful life.

## Full-time (water) extraction.

For applications that require full-time operation of reservoir headspace extraction fans, special option V1 integrates the V1 Compact Vacuum Dehydrator to provide a powerhouse water removal option that complements Ion-Exchange Filters and high efficiency on-board particulate filtration.



# FSJL Specifications

<b>Dimensions<sup>1</sup></b>	<b>Height</b> 58" (147 cm)	<b>Length<sup>2</sup></b> 47.5" (121 cm)	<b>Width<sup>2</sup></b> 31.5" (80 cm)	<b>Approximate Weight</b> 571 lbs (259 kg)
<b>Connections</b>	<b>Inlet</b> 1" FNPT with ball valve		<b>Outlet</b> 1" FNPT with ball valve	
<b>Max Reservoir Size</b>	<b>FSJL05</b> 150 gal (560 liters)	<b>FSJL1</b> 300 gal (1,125 liters)	<b>FSJL2</b> 800 gal (3,000 liters)	<b>FSJL4</b> 1,600 gal (6,000 liters)
<b>Element Configuration</b>	<b>Particulate filter</b> HP107L18-VTM710-C-V		<b>ICB</b> FSJL05: ICB600504-J FSJL1: ICB 600504-J x 2 FSJL2: ICB600524-J FSJL4: ICB600524-J x 2	
<b>Seals</b>	Fluorocarbon + silicone			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 86°F to 176°F (30°C to 80°C)		<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)	
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating		<b>Tray</b> Carbon steel with industrial coating	
<b>Electric Motor</b>	TEFC, 56-145 frame 0.5 – 1 HP, 900 – 1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, aluminum enclosure with short circuit and overload protection.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar)			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>2</sup>			
<b>Media Description</b>	<b>VTM</b> β0.9 <sub>(c)</sub> ≥ 4000 particulate, insoluble oxidation by-product and water removal media.		<b>ICB</b> Ion charge bonding resin media for molecular removal of acids, gels and deposits, oxidation by-products and dissolved metal ions from polyol ester and other synthetic fluids.	
<b>Fluid Compatibility</b>	Type II, MIL-L-23699, polyol ester base stock, synthetic turbo oils and polyol esters.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Air consumption values are estimated maximums and will vary with regulator setting.

# FSJL Part Number Builder

**FSJL**    -

Flow Rate      Indicator      Power Options      Special Options

**Fluid Type**      **JL**      Aeroderivative jet lubricants

<b>Flow Rate</b> <sup>1</sup>	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>4</b>	4 gpm (15.1 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

<b>ΔP Indicator</b> <sup>2</sup>	<b>D</b>	22 psid visual gauge + electric switch
	<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b>
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	<b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
	<b>57</b>	575 V ac, 3P			

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**  
**X\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Special Options</b>	<b>A</b>	Air cooled heat exchanger (consult factory)
	<b>B</b>	Complete filter bypass line
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D</b> <sup>3</sup>	High filter ΔP auto shutdown
	<b>E</b>	100 mesh cast iron basket strainer
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
	<b>H</b>	Automatic high temp shut down (160°F, 71°C)
	<b>L</b>	High filter element ΔP indicator light
	<b>M</b>	Total system flow meter (120 cSt max)
	<b>O</b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>S</b>	All wetted components 303 or higher stainless steel <sup>4</sup>
	<b>U</b>	CUL and/or CSA marked starter enclosure for Canada
	<b>V</b>	Lifting eye kit
	<b>V1</b>	Add V1 Compact Vacuum Dehydrator
<b>W</b>	Automatic air bleed valve	
<b>Z</b>	On site start-up training	

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Particulate filter only. Ion-Exchange Filters housing is equipped with 0-160 psi static pressure gauge. Industrial, liquid filled.

<sup>3</sup>"D" Option required DP Indicator option with electric switch to be selected ("D").

<sup>4</sup>With exception to cast iron gear pump.

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# ICB<sup>®</sup>

## Ion-Exchange Filters

While offering best in class acid and varnish removal, ICB<sup>®</sup> filter elements significantly reduce production losses and resolve servo-valve issues by eliminating the contamination responsible for sticking or sluggish valves. Conventional acid filters cannot remove this contamination and are also significant contributors of harmful metals and fine particulate. Ion-Exchange Filters eliminate these key issues and direct maintenance to where it matters most.

Donaldson.  
HY-PRO<sup>™</sup>

[hyprofiltration.com/](http://hyprofiltration.com/)




Powered by EPT Clean Oil's patented ICB<sup>®</sup> ion-exchange filters

\*Please check with your DHP distributor on availability.

## Stop varnish related fail-to-starts and unit trips.

Ion-Exchange Filters attacks the source of the problem on a molecular level, removing the oxidation by-products that form varnish deposits. By reversing the chemical process of varnish deposit formation, Ion-Exchange Filters restores oil health to remove varnish throughout the system and in critical components so your servo valves operate more efficiently than ever.

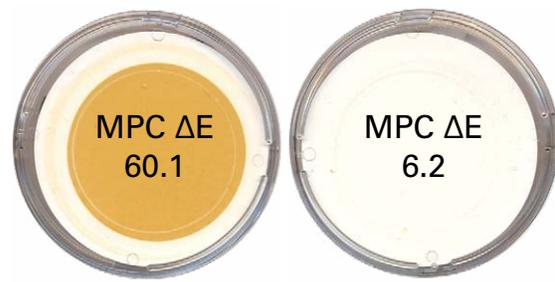


## Remove what others left behind.

As dissolved metals accumulate, they act as a catalyst forming depots on servo valves and gels that can cause valve restriction and mask filter elements. Ion-Exchange Filters elements do not contribute metals and will remove dissolved metals from airborne ingress and element leaching to <10 ppm.

## Minimize acid. Maximize efficiency.

High acid number (AN) in phosphate ester means premature fluid replacement if left un-managed. Since acid production is autocatalytic, the acid in your system will generate more acid which, left unchecked, can quickly become a serious problem. Ion-Exchange Filters technology removes acid to our target of AN < 0.05 with 4-8 times the capacity of alternate acid removal medias.

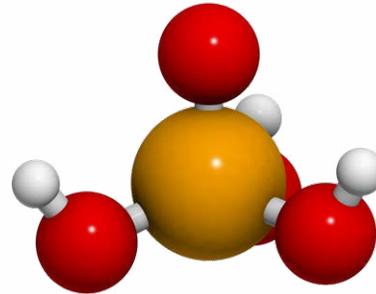

$H_3PO_4$   
Phosphoric Acid



## Unlike all others.

Ion-Exchange Filters is unlike all other ion exchange resin products. Our 20 years of operating experience and continued research has led to best in class resistivity improving capability with increases >10X having been observed. We use custom engineered resins that have been optimized for the lubricant environment.

## Extend your oil life, don't flush it.

For most EHC systems, the primary operating fluid is phosphate ester. This is a very safe fluid with excellent lubricating properties that when properly maintained can provide years of trouble-free operation without the need for a flush during replacement. Unfortunately, many power plants have insufficient or incorrect maintenance which causes wide ranging issues that result in actual or high risk of production loss, and expensive flushes after the fact.




## Upgrade your filtration.

Ion-Exchange Filters filters are drop in replacements for many OEM sizes and come in a variety of chemistries for specialized lubricant and fluid applications. When used in conjunction with Donaldson Hy-Pro Dualglass media filter elements, ISO particle codes will be decreased significantly with document results.

# Acid Scavenging Technology Comparison


Selexsorb	Fuller's Earth	ICB® Ion-Exchange Filter
Produces by-products that react with fluid to cause soft gel deposits	Produces hard salts and soap deposits that coat sensitive servo valves	Removes the dissolved break-down products that are responsible for servo valve failures (See Figures 1 and 2)
Can only control acids up to 0.25 mg KOH/g, leading to diminished fluid resistivity	Can only control acids up to 0.25 mg KOH/g, leading to diminished fluid resistivity	Dramatically increases fluid resistivity values which eliminates a common servo-valve failure mode referred to as electro-kinetic-wear or valve erosion
Removes acid but re-contaminates your fluid with sodium, aluminum, silicon	Removes acid but re-contaminates your fluid with magnesium, iron, calcium	Does not contribute fine particulate, or add dissolved metals that normally contribute to increased rates of oxidation
3x less capacity to remove acid than Ion-Exchange Filters	6-7x less capacity to remove acid than Ion-Exchange Filters	Highest ratio of resin volume to flow rate for higher single pass removal rate and much lower cost of ownership
Made from purified activated Alumina as a Y-Zeolite	Made from magnesium oxide and hydroxide, processed from attapulgus clay or atpulgite	Complete stainless steel construction, featuring robotic, spiral welding which provides maximum filter integrity, adding a new fail-safe in the EHC fluid conditioning system

Figure 1 – Deposition Tendency Test


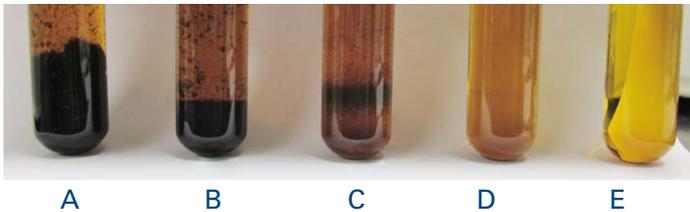


In Step 1 of the Deposition Tendency Test, referred to in the EPRI EHC Fluid Maintenance Guide 2002, Page 4-39, EHC fluid is mixed with Hexane which forces out dissolved contamination into solid form. In the first three test tubes (A,B,C), EHC fluid using conventional treatment form visible solids. Servo-valve performance and reliability would be significantly impaired using EHC fluid in this condition. In the last 2 test tubes (D,E) where the EHC fluid was cleaned with Ion-Exchange Filters, no deposition or solids of any form are observed. Servo-valve response time and reliability would be maximized operating EHC fluid in this condition.

Figure 2 – Servo Valve Spool with Contamination Deposit

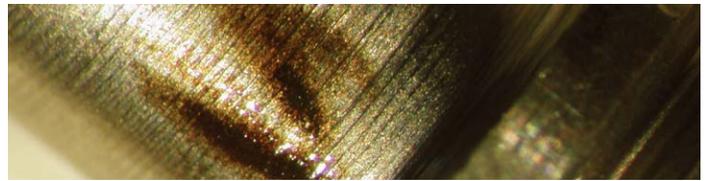

Servo Valve Spool showing signs of fluid contamination deposition. The contamination responsible for these deposits is not routinely measured and in this example the servo-valve would be at abnormal risk level for failure. The Deposition Tendency test as shown in Figure 1, easily identifies if this contamination is present.

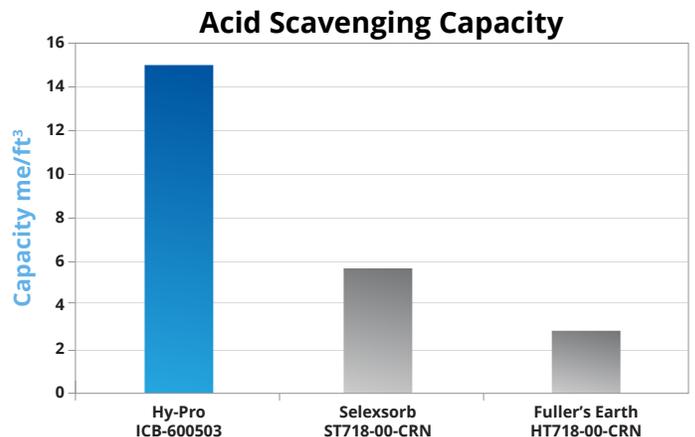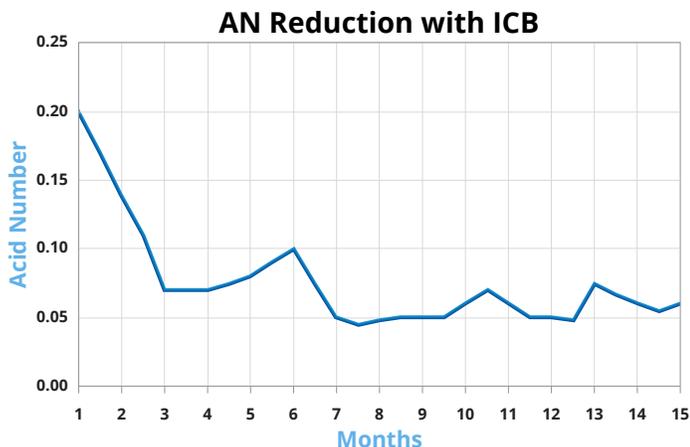

# ICB Specifications

Dimensions	Model	Length	Outer Diameter	Inner Diameter	Dry Weight
	ICB-600502	11.030 in (28.016 cm)	4.869 in (12.367 cm)	1.866 in (4.740 cm)	8.5 lbs (3.9 kg)
	ICB-600503	18.000 in (45.720 cm)	6.211 in (15.776 cm)	2.250 in (5.715 cm)	13.0 lbs (5.9 kg)
	ICB-600504	18.000 in (45.720 cm)	6.211 in (15.776 cm)	2.600 in (6.604 cm)	13.0 lbs (5.9 kg)
	ICB-600508	32.072 in (81.463 cm)	6.202 in (15.753 cm)	1.555 in (3.950 cm)	23.0 lbs (10.4 kg)
	ICB-600509	17.875 in (45.403 cm)	11.045 in (28.054 cm)	2.375 in (6.033 cm)	35.0 lbs (15.9 kg)
	ICB-600510	19.010 in (48.285 cm)	11.045 in (28.054 cm)	2.375 in (6.033 cm)	37.0 lbs (16.8 kg)
	ICB-600511	19.473 in (49.461 cm)	11.020 in (27.991 cm)	2.375 in (6.033 cm)	38.0 lbs (17.2 kg)
	ICB-600514	20.157 in (51.199 cm)	11.045 in (28.054 cm)	2.375 in (6.033 cm)	40.0 lbs (18.1 kg)
	ICB-600524	20.157 in (51.199 cm)	11.045 in (28.054 cm)	2.375 in (6.033 cm)	40.0 lbs (18.1 kg)
	ICB-601349	24.563 in (62.390 cm)	10.281 in (26.114 cm)	8.919 in (22.654 cm)	35.0 lbs (15.9 kg)
	ICB-601946	9.119 in (23.162 cm)	6.211 in (15.776 cm)	2.600 in (6.604 cm)	6.0 lbs (2.7 kg)

Operating Temperature	86°F to 176°F (30°C to 80°C)
-----------------------	---------------------------------

Operating Pressure	Maximum operating ΔP is <90 psid (<6.2 bard) with normal ΔP <25 psid (<1.8 bard)
--------------------	--

Materials of Construction	Shell	Endcaps	Handle	Seals
	Stainless steel	Stainless steel	Stainless steel	Silicone <sup>1</sup>

Media Description <sup>2</sup>	A	C	J	T	V
	A filter for phosphate ester, fire-resistant lubricants, sold under the brand names: Fyrquel®, Fyrquel® EHC, Fyrquel® EHC Plus, Fyrquel® GT, Reolube® TurboFluid 46XC, Reolube® TurboFluid B, Anvol® 46 XC, Shell Turbo® Fluid DR 46, Mobil Pyrotec® HFD 46, and many others	C filter for polyol ester fluids including QuintoLubric®	J filter for polyol ester lubricants used in aero derivative jet engines including Mobil Jet® II	T filter for mineral oil based hydraulic fluids	V filter for mineral oil based turbine and compressor lubricants

Applications	A	C	J	T	V
	Acid + Varnish Scavenging (Acid Numbers <0.5 mg KOH/g)	Aggressive Acid + Varnish Scavenging (Acid Numbers >0.5 mg KOH/g)	Acid + Varnish Scavenging	Varnish Removal	Aggressive Varnish + Moderate Acid Scavenging

**Filter Sizing Guidelines** Phosphate ester and EHC applications ideally require 3-4x reservoir exchange per day for normal fluid maintenance. Mineral Oil based turbine and compressor lubricants require 1x reservoir exchange per day for normal lubricant maintenance. For fluid or lubricant restoration higher flow rates may be required. Contact Donaldson Hy-Pro for application guidelines, selection and sizing assistance.

<sup>1</sup>ICB-600508 utilizes Fluorocarbon gasket standard.  
<sup>2</sup>Fyrquel is a registered trademark of ICL. Reolube is a registered trademark of Chemtura, Anvol is a registered trademark of Castrol. Shell Turbo is a trademark of Shell Oil Company. Mobil Pyrotec and Mobil Jet are trademarks of Exxon Mobil Corporation. Quintolubric is a registered trademark of Quaker Chemicals.  
 For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# Water Contamination

## Types, Removal & Prevention

Water is one of the most common and most damaging contaminants found in lube or hydraulic systems. Continuous or periodic high water levels result in damage such as: metal etching (corrosion), abrasive wear in hydraulic components, dielectric strength loss, fluid breakdown, additive precipitation and oil oxidation, reduction in lubricating properties, and many others.

The effects of moisture in your oil systems can drastically reduce on-stream plant availability. Bearing life and critical component life can also be greatly reduced by moisture levels above and within the saturation point. What makes matters worse, the degree of contamination and type of water contamination play a pivotal role in determining the best method for removal. The three types are listed below.

Free and dissolved water in hydraulic and lube systems leads to bearing fatigue, accelerated abrasive wear, corrosion of metal surfaces, increased electrical conductivity, viscosity variance, loss of lubricity, and fluid additive breakdown. Sources include condensation, reservoir leakage, worn actuator seals, heat exchanger leakage, new oil and more.



### Dissolved Water



Dissolved water is the state at which individual water molecules (not visible to the naked eye) are dispersed throughout a fluid. Dissolved water accrues below the fluid's saturation point. Fluid with only dissolved water in it will have a bright, clear appearance.

### Emulsified Water



Once the dissolved water's concentration has exceeded the saturation point of the fluid, microscopic water droplets will start to form an emulsion which is suspended within the fluid. Fluid samples containing emulsified water will have a cloudy, hazy appearance.

### Free Water



Free water is formed once the emulsified water has reached a concentration at which it starts a separation phase and large water droplets begin to fall out of solution. Fluid samples containing free water will have a cloudy, hazy appearance. As the sample settles, the free water will fall out to form a separated layer on the bottom of the sample.

## VUD

Vac-U-Dry Vacuum Dehydrators



**128** Vacuum dehydration removes free, emulsified and dissolved water while maintaining low operating ISO Codes with high efficiency particulate filtration. With flow rates up to 100 gpm (379 lpm) and 24x7 unattended operation capabilities, the VUD is ideal for all hydraulic and lube oil fluids up to ISO VG 680.

## V1

Compact VUD Vacuum Dehydrators



**136** Optimized for tight spaces with a salt water edition for marine applications, V1 removes free, emulsified and dissolved water while maintaining low operating ISO Codes with high efficiency particulate filtration. Ideal for all hydraulic and lube oils up to ISO VG 680.

## COT

Turbine Oil Conditioning Systems



**140** A total conditioner for turbine and compressor lube oils, COT rapidly removes gross free and emulsified water by coalesce liquid-liquid separation technology. Ideal for managing steam turbine water ingress during start-up or continuous cooler/steam leaks. COT maintains low operating ISO Codes with high efficiency particulate filtration. Suitable only for R&O lube oils up to ISO VG 68.

## FCLCOT

Turbine Oil Conditioning Filter Carts



**146** A compact, portable solution for boiler feed pump and compressor lube oils, FCLCOT rapidly removes gross free and emulsified water by coalesce liquid-liquid separation technology. Suitable only for R&O lube oils up to ISO VG 68. Maintains low operating ISO Codes with high efficiency particulate filtration.

# VUD

## Vac-U-Dry Vacuum Dehydrators

### Powered by iCue™ Connected Technology

The optimized balance between heat, vacuum, process design and an easy, user friendly operating system for removal of water and particulate from hydraulic and high viscosity lubricating oils. Equipped with generously sized, high efficiency filtration, the VUD is the ultimate oil purifier.

Keeping fluids clean and dry extends component and bearing life, increases productivity, minimizes downtime and extends useful fluid life. The VUD is ideal for removal of all forms of water, including free, emulsified and dissolved water and gas from hydraulic and lubricating oils.

**Donaldson.**  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



## Contamination is complicated. Removing it is easy.

With features including viscosity specific dispersal element designs, fin tube low watt density heaters, oversized particulate filter, adjustable recirculation line, auto phase detection and reversal, programmable thermostat, proprietary vacuum chamber level control, foam sensor and auto-drain, VUD is the ultimate contamination removal system.



121



## Results you can see.

Clear covers on the vacuum chamber and condensate collection tanks let you see what is really happening inside the VUD. You will know when you start removing water or when you are almost below saturation point with just a glance.

## Never stops working.

VUD is a workhorse designed for 24/7 unattended operation. With a dual condensate collection tank design, auto water level sensors and automatic drain valves, there is no need to stop to drain water. The oversized condenser and dual condensate collection tanks work together to keep the water out of the vacuum pump.



## Integrated intelligence.

The VUD smart relay enabled control panel makes start-up and shut-down safe and operator friendly so that everything is controlled with the simple push of a button. To take it even further, the optional PLC Touch Screen provides operating controls and data right at your fingertips.

## Filtration starts with the filter(s).

Particulate media options down to  $\beta_{3(C)} \geq 4000$  and viscosity specific dispersal elements provide you with the best filtration and water removal capabilities in the world, period.



## Completely, entirely, totally, all inclusive.


When it comes to comprehensive filtration and water removal, the buck stops here. VUD customization takes on many forms such as unique size requirements, combining VUD with other technologies such as FRF acid or turbine lube oil varnish removal, all to deliver the perfect oil purification system to meet your exact needs.


# The Unmatched Purification Process

## How it works


Contaminated oil is drawn into the Vac-U-Dry purifier by a high output vacuum pump. The oil passes through the low watt density heater where heated to optimum temperature for the dehydration process (150°F, 66°C). The oil enters the vacuum chamber passing through specially designed dispersal elements which create a thin film of oil that is exposed to the vacuum. The water is vaporized and then drawn into the condenser where it liquefies and drains into the condensate tank.

The dehydrated oil flows to the bottom of the vacuum chamber and is removed by the discharge pump where it is pumped through the high efficiency particulate filter assembly ( $\beta_{x_{cl}}$  >4000) and returned to the system. The recirculating line helps the Vac-U-Dry reach optimum temperature in cold start situations and can be used to throttle machine inlet and outlet flow. From here, your oil can either be recirculated for additional temperature and contamination control or returned to your reservoir or equipment where it will operate more efficiently than ever.

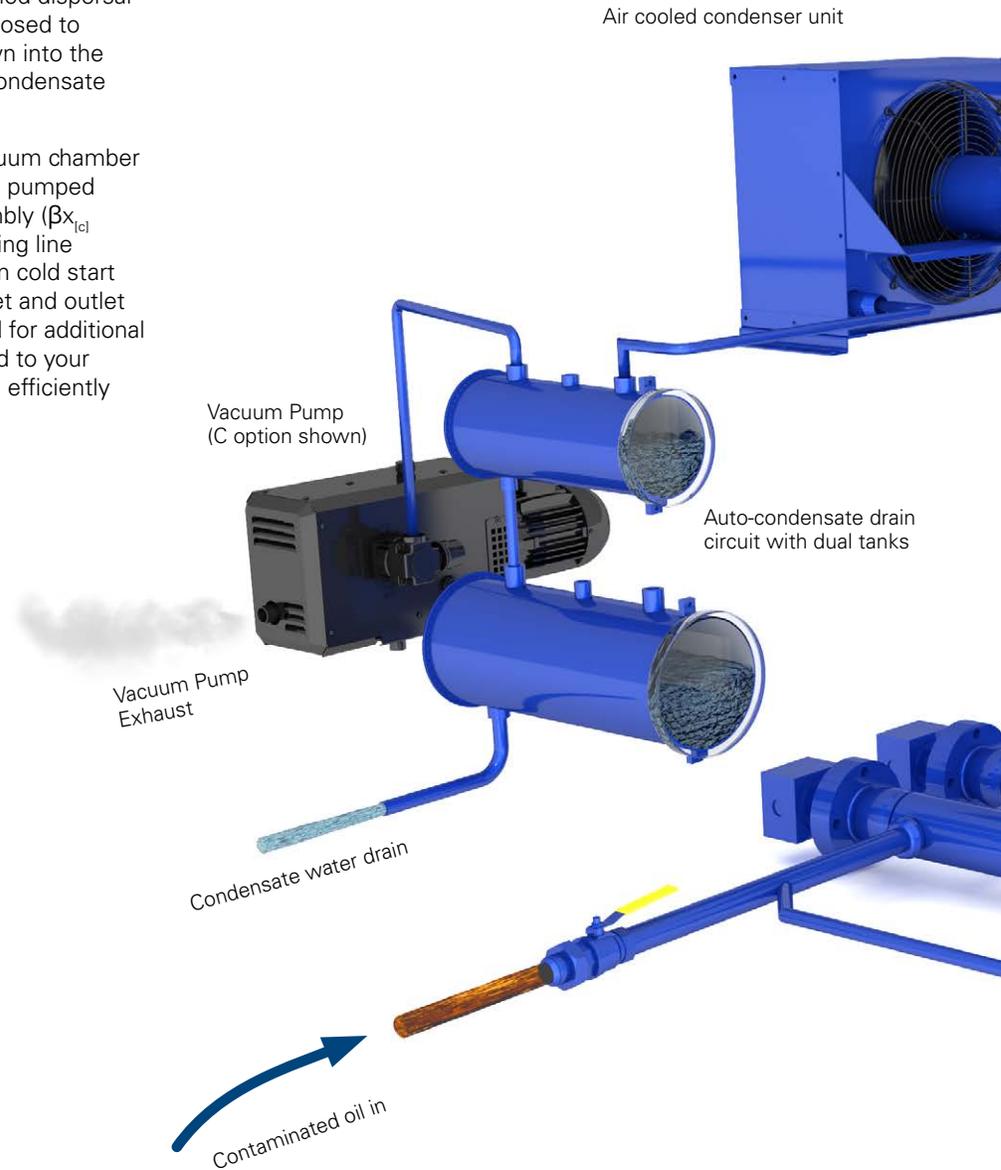

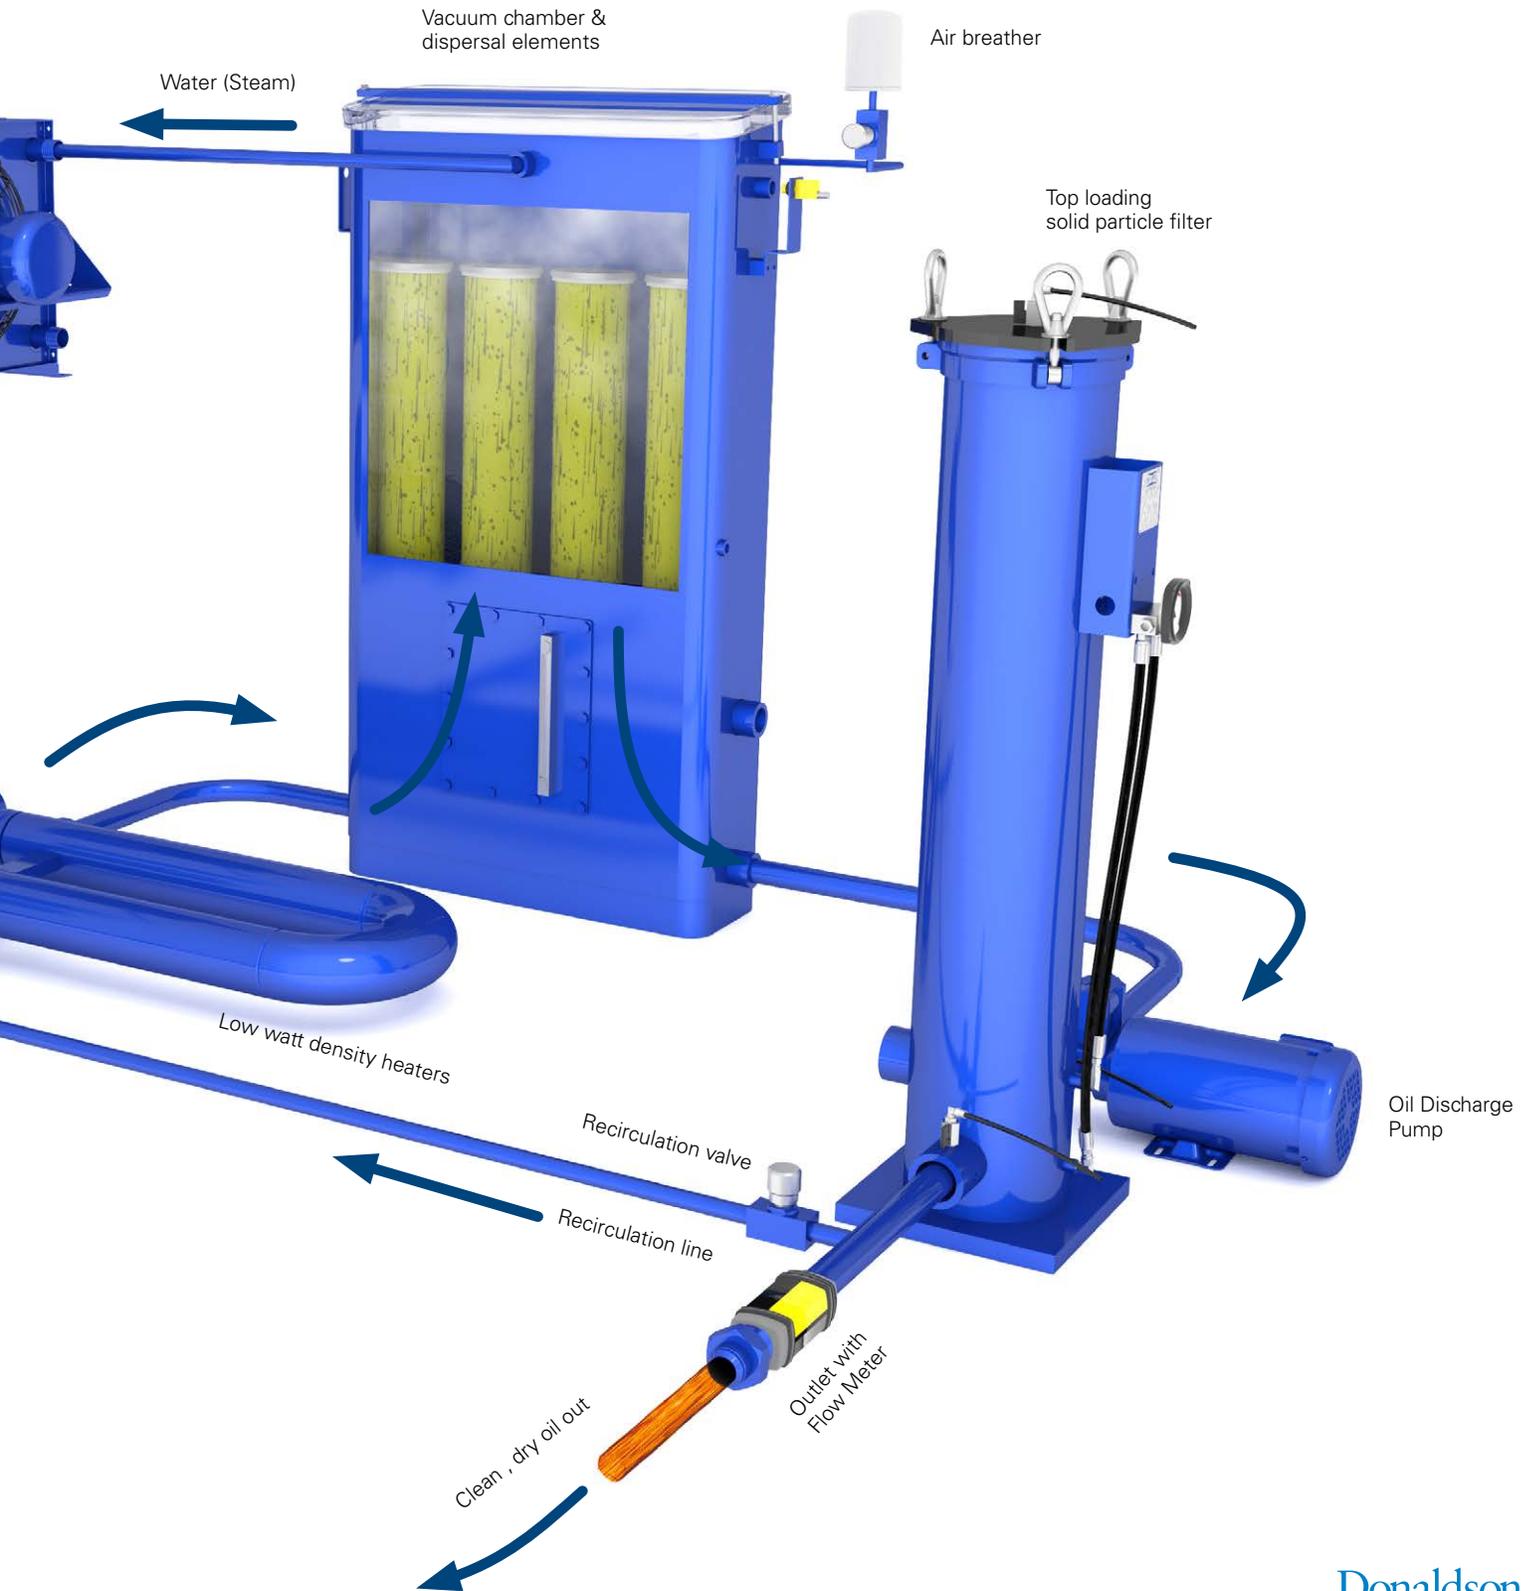

# The Proven Performer

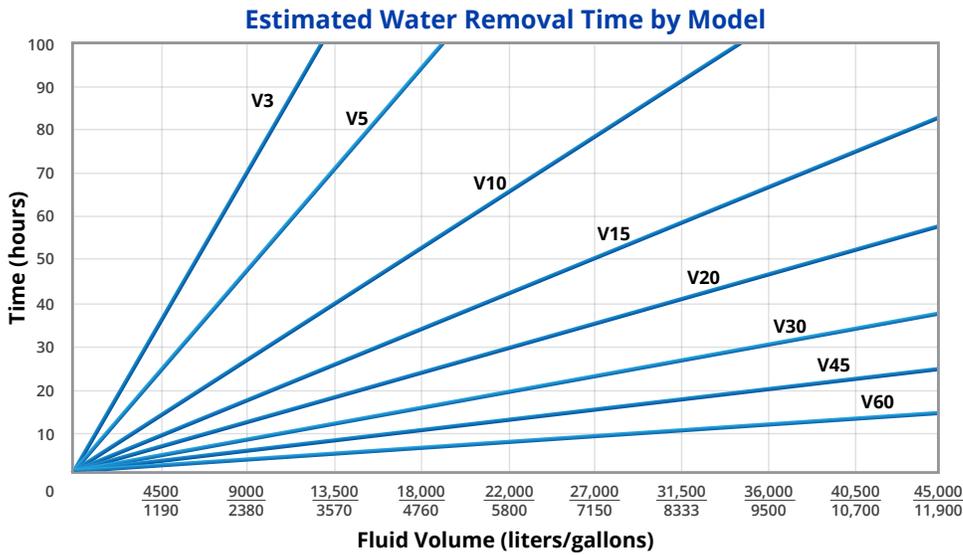

No other technology removes water faster or more safely with less chance of foaming than the Donaldson Hy-Pro VUD. The graph here represents the estimated time required per model to remove water from 5000 ppm (0.5%) down to 150 ppm (0.015%) for increasing reservoir sizes.

## Vacuum Pump Options

VUDs come standard with two vacuum pump options to best suit your application needs. Options C and D offer maximum portability to use your VUD in almost any location. Whether you're using your VUD to service multiple systems or for service work, you'll have unmatched filtration everywhere you need it.



### C – Dry Seal (Dry Rotary Claw)

Long maintenance interval (5,000 hour synchronizing gear oil change) and great for portability. With excellent corrosion resistance to condensate exposure, this offers our lowest cost of ownership vacuum pump option.



### D – Dry Seal (Lubricated Rotary Vane)

500-750 hour maintenance interval (lubricating oil and filter change), excellent for portability, compact size and low weight. The D option vacuum pump offers our lowest initial cost of ownership.

## Vacuum power that doesn't suck.


Pulled by the vacuum pump, oil passes through the heater housing and vacuum chamber dispersal elements, providing smooth flow for optimum water removal without foam. The tall vertical vacuum chamber achieves maximum oil film surface area on the dispersal elements, aided by proprietary variable flow level control, to remove water from your oil incredibly fast with unmatched consistency.



125

## Dispersal elements.

Inside every VUD's vacuum chamber is the secret to its high efficiency water removal success. Viscosity range specific dispersal elements configured properly means faster water removal without the foaming issues that come with a one size fits all dispersal media for hydraulic and lube oils.

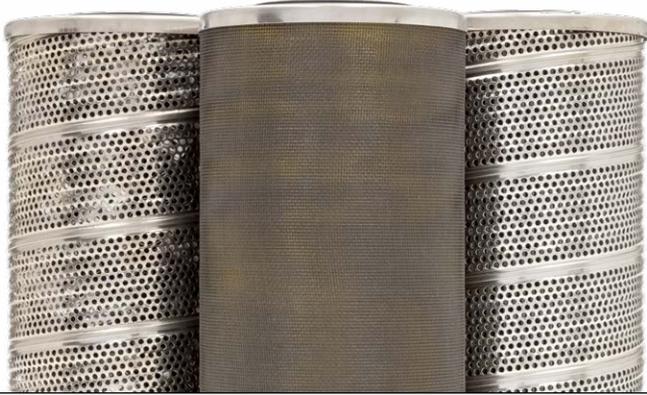

## Take control of your system, automatically.

The Inlet Control Valve (N/C Solenoid) automatically closes when the VUD is not in operation, preventing the unit from siphoning fluid from a reservoir or flooding from a positive head inlet situation.



## Synced to your system.

Achieve optimum VUD process temperature faster and ease start-up on high viscosity oils, especially when they're cold. Also ideal for adjusting overall VUD return flow down when using VUD on a small reservoir or gearbox. Simple and effective, the recirculation line adds incredible flexibility to fine tune the VUD to your system.



## You can't beat the heat.

With no direct contact with the heating element, your turbine oil will safely and quickly get up to temperature without the risk of burning. The programmable temperature control with integral no-flow switch prevents oil damage and allows you to heat your fluids at your own pace. And what's more: all this comes standard on every VUD.



# VUD Specifications

Model	V3C	V5C	V10C	V15C	V20C	V30C	V45C	V60C	V100C
Height <sup>1</sup>	60" (152 cm)	75" (191 cm)	75" (191 cm)	75" (191 cm)	75" (191 cm)	89" (226 cm)	75" (191 cm)	89" (226 cm)	89" (226 cm)
Length <sup>1</sup>	56" (142 cm)	56" (142 cm)	56" (142 cm)	56" (142 cm)	72" (183 cm)	84" (213 cm)	84" (213 cm)	96" (244 cm)	120" (305 cm)
Width <sup>1</sup>	32" (82 cm)	32" (82 cm)	32" (82 cm)	32" (82 cm)	36" (91 cm)	40" (102 cm)	48" (122 cm)	60" (153 cm)	96" (244 cm)
Approximate Weight <sup>1</sup>	850 lbs (386 kg)	2000 lbs (908 kg)	2400 lbs (1089 kg)	2500 lbs (1134 kg)	2800 lbs (1270 kg)	3100 lbs (1406 kg)	3400 lbs (1542 kg)	3700 lbs (1678 kg)	4600 lbs (2087 kg)
Dispersal Element Quantity	2 x 11" (28 cm)	2 x 22" (56 cm)	3 x 22" (56 cm)	3 x 22" (56 cm)	4 x 22" (56 cm)	4 x 36" (91 cm)	8 x 22" (56 cm)	8 x 36" (91 cm)	12 x 36" (56 cm)
Operating Temperature	<b>Fluid Temperature</b> 30°F to 180°F (0°C to 82°C)				<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)				
Materials of Construction	<b>Frame &amp; Brackets</b> Carbon Steel		<b>Heater element</b> Aluminum		<b>Condensate tanks</b> Stainless steel		<b>Element bypass valve</b> Nylon		
	<b>Heater housing</b> Carbon Steel		<b>Filter assembly</b> Carbon steel		<b>Chamber/Tank Lid Seals</b> Neoprene Rubber		<b>Solenoid valves</b> Brass		
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$			<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$			<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )		

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# VUD Part Number Builder

<b>VUD</b>	<input type="text"/>									
	Flow Rate	Vacuum Pump	Power Options	Dispersal Element	Media	Seals	Heaters	Condenser	Special Options	Multi Function Unit

<b>Flow Rate</b> <sup>1</sup>	<b>3</b>	3 gpm (11 lpm)	<b>30</b>	30 gpm (114 lpm)
	<b>5</b>	5 gpm (18.9 lpm)	<b>45</b>	45 gpm (170 lpm)
	<b>10</b>	10 gpm (37.9 lpm)	<b>60</b>	60 gpm (225 lpm)
	<b>15</b>	15 gpm (56.8 lpm)	<b>100</b>	100 gpm (379 lpm)
	<b>20</b>	20 gpm (75.7 lpm)		

<b>Vacuum Pump Type</b>	<b>C</b>	Dry seal (rotary claw)
	<b>D</b>	Dry seal (lubricated rotary vane)

<b>Power Options</b>	<b>60 Hz</b>		<b>50 Hz</b>	
	<b>23</b>	208-230 V ac, 3P	<b>38</b>	380 V ac, 3P
	<b>46</b>	460-480 V ac, 3P	<b>41</b>	415 V ac, 3P
	<b>57</b>	575 V ac, 3P	<b>52</b>	525 V ac, 3P

<b>Dispersal Element</b>	<b>D</b>	Pleated dispersal element - all synthetic media (viscosity ≤ ISO VG 220)
	<b>P</b>	Metallic packed dispersal element - not for use in phosphate ester systems (viscosity ≥ ISO VG 460)
	<b>W</b>	Pleated stainless steel dispersal element (ISO VG 150-320)

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>Stainless wire mesh</b>	
	<b>1M</b>	β <sub>3(c)</sub> ≥ 4000	<b>25W</b>	25μ nominal
	<b>3M</b>	β <sub>4(c)</sub> ≥ 4000	<b>40W</b>	40μ nominal
	<b>6L</b>	β <sub>6(c)</sub> ≥ 4000	<b>74W</b>	74μ nominal
	<b>10M</b>	β <sub>11(c)</sub> ≥ 4000	<b>149W</b>	149μ nominal
	<b>16M</b>	β <sub>16(c)</sub> ≥ 4000		
	<b>25M</b>	β <sub>22(c)</sub> ≥ 4000		

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E<sup>2</sup></b>	EPR seals (for Skydrol use)

<b>Heaters</b>	<b>9</b>	9 kW	<b>56</b>	56 kW (2 x 12 kW) (2 x 16 kW)
	<b>12</b>	12 kW	<b>64</b>	64 kW (4 x 16 kW)
	<b>24</b>	24 kW (2 x 12 kW)	<b>80</b>	80 kW (5 x 16 kW)
	<b>36</b>	36 kW (3 x 12 kW)	<b>96</b>	96 kW (6 x 16 kW)
	<b>48</b>	48 kW (4 x 12 kW)		

<b>Condenser</b>	<b>A</b>	Air cooled	<b>L</b>	Liquid cooled
	<b>B</b>	Air & liquid cooled		

<b>Special Options</b>	<b>3</b>	LFM3 Filter Housing (3 particulate Elements)	<b>O</b>	On-board PM-1 particle monitor
	<b>4</b>	LFM4 Filter Housing (4 Particulate Elements)	<b>P</b>	PLC touch screen operation & data
	<b>8</b>	8" solid wheel upgrade	<b>P9<sup>6</sup></b>	Phosphate ester fluid compatibility modification
	<b>A<sup>3</sup></b>	Auto condensate drain	<b>R<sup>3</sup></b>	Electrical phase reversal switch
	<b>B</b>	Pre-filter bag filter housing	<b>S</b>	Inlet line basket strainer
	<b>C</b>	CE marked	<b>S9<sup>7</sup></b>	Skydrol fluid compatibility modification
	<b>D</b>	Dirty filter indicator alarm light	<b>T<sup>4</sup></b>	Hose kit (suction & return hoses + wands)
	<b>E</b>	Vacuum pump exhaust filter	<b>U</b>	50' (15 m) electrical cord without plug
	<b>F</b>	Vacuum chamber foaming sensor	<b>V<sup>4</sup></b>	Inlet control valve (for positive head inlet)
	<b>G</b>	316 stainless condensate wet parts (304 standard)	<b>W</b>	Water sensor and indicator
	<b>J</b>	Individual heater selector switches	<b>X</b>	Hazardous-location Rated Class 1, Div 2, Grp C/D, Air Purge Panel
	<b>K</b>	Sight flow indicator (wheel type)	<b>X1<sup>8</sup></b>	Explosion Proof Class 1, Div 1, Grp C/D, Class I XP Enclosure
	<b>L</b>	Lifting eye kit	<b>X2<sup>8</sup></b>	Explosion Proof Class 1, Div 2, Grp C/D, Class I XP Enclosure
	<b>M</b>	Discharge line flow meter	<b>Y</b>	VFD variable speed motor frequency control

<b>Multi Function Units</b>	<b>omit</b>	Standard VUD capabilities
	<b>ICBPE<sup>9</sup></b>	Phosphate ester acid & dissolved metal removal (contact factory for alternate fluids)

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.  
<sup>2</sup>Contact factory for other fluid option compatibility.  
<sup>3</sup>Standard supplied options, must be included in part number.  
<sup>4</sup>Recommended option.  
<sup>5</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.  
<sup>6</sup>When selected, must be paired with Seal option "E." Contact factory for more information or assistance in fluid compatibility.  
<sup>7</sup>Consult factory for Cast Aluminum Explosion Proof Panel.  
<sup>8</sup>Varnish and ICB add-on technologies condition a portion of maximum VUD flow. Standard ww flow rate ≤ 5 gpm. ICB add-on will be sized to reservoir volume. V3 uses single element housing (ICB600524)  
For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# V1

## Compact VUD Vacuum Dehydrator

A compact and mobile dehydration and high efficiency filtration solution, the V1 prevent acidity and loss of lubrication properties caused by inefficient dehydration and high ingression.

Ideal for rapidly removing all forms of water including free, emulsified, and dissolved water and gas from hydraulic and lube oils.

Donaldson.  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



V1S model shown



V1P model shown

## Different by design.

The V1S is optimized for low headspace clearance for use in marine applications and with the S special option, V1S can remove the water without leaving salt behind to cause problems in thruster, steering and propulsion systems.



## Size matters.

With small size comes great power. Utilizing single phase power supplies, V1 models provide the same unmatched water and particulate removal as larger VUDs on a smaller scale with the added benefit of incredible mobility. And with the ability to use single phase connections for power, you'll have clean, dry fluids anywhere and everywhere you need them.

## Results you can see.

Clear covers on the vacuum chamber and condensate collection tank let you see as the V1 removes the water from your oil and collects it in the condensate tank. From there, you can say goodbye as it's drained and removed from your system, for good.



## Integrated intelligence.

The V1 smart relay enabled control panel makes start-up and shut-down operator friendly and safe so that when you press the start button the automatic scripted sequence controls what comes on and when, meaning you don't need three hands to get it going.

## Never stops working.

V1 is a workhorse designed for 24/7 unattended operation. With a dual condensate collection tank design, auto water level sensors and automatic acting drain valves, there is no need to stop to drain water.



## Completely, entirely, totally, all inclusive.

When it comes to comprehensive filtration and water removal, the buck stops here. V1 customization takes on many forms such as unique size requirements, combining V1 with other technologies (i.e. FRF acid or turbine lube oil varnish removal), or other customer specific needs.

# V1 Specifications

Model	V1P	V1S
Height <sup>1</sup>	50" (127 cm)	45" (114 cm)
Width <sup>1</sup>	28" (71 cm)	34" (86 cm)
Depth <sup>1</sup>	28" (71 cm)	24" (61 cm)
Approximate Weight <sup>1</sup>	400 lbs (181 kg)	400 lbs (181 kg)
Inlet	¾" male JIC	¾" male JIC
Outlet	½" male JIC	½" male JIC
Electric Motor	TEFC with overload protection	
Pump	Cast iron, positive displacement gear pump with internal relief.	
Vacuum Pump	Dry Rotary Vane	
Operating Temperature	<b>Fluid Temperature</b> 32°F to 180°F (0°C to 82°C)	<b>Ambient Temperature</b> -4°F to 104°F (-20C to 40C)
Materials of Construction	<b>Frame</b> Carbon steel or stainless steel	<b>Filter assembly</b> Aluminum and carbon steel
Electric Connection	50' (15 m) power cord supplied with machine.	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[C]}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{[C]}} \geq 2$ ( $\beta_x \geq 2$ )
Fluid Compatibility	Petroleum and mineral based fluids. For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester or skydrol fluid compatibility select fluid compatibility from special options.	

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# V1 Part Number Builder

**V1**       **A-**

Model Type    Power Option    Dispersal Element    Media    Seal    Heater    Special Options

**Model**

**P** Hand truck style design for maximum mobility  
**S** Low profile design optimized for marine low headspace applications

**Power Options**

<b>60 Hz</b>	<b>50 Hz</b>
<b>12</b> 120 V ac, 1P	<b>22</b> 220 V ac, 1P
<b>23</b> 230 V ac, 1P	

**Disperser Element**

**D** Pleated disperser element - all synthetic media (viscosity ≤ ISO VG 220)  
**P** Metallic packed disperser element (viscosity ≥ ISO VG 460)<sup>1</sup>  
**W** Pleated stainless steel disperser element (ISO VG 150-320)

**Media Selection**

<b>G8 Dualglass</b>	<b>Stainless wire mesh</b>
<b>1M</b> β <sub>3(CI)</sub> ≥ 4000	<b>40W</b> 40μ nominal
<b>3M</b> β <sub>4(CI)</sub> ≥ 4000	<b>74W</b> 74μ nominal
<b>6M</b> β <sub>6(CI)</sub> ≥ 4000	<b>149W</b> 149μ nominal
<b>12M</b> β <sub>11(CI)</sub> ≥ 4000	
<b>16M</b> β <sub>16(CI)</sub> ≥ 4000	
<b>25M</b> β <sub>22(CI)</sub> ≥ 4000	

**Seals**

**B** Nitrile (Buna)  
**V** Fluorocarbon  
**E** EPR seals + stainless steel support mesh

**Heater<sup>1</sup>**

**1** 1 kW (power option 12 only)  
**2** 2.5 kW (power options 22 & 23 only)  
**4** 4.5 kW (power options 22 & 23 only)

**Special Options**

**A** Auto-condensate drain  
**C** CE marked for machinery safety directive 2006/42/EC  
**D** Filter High ΔP Light  
**F** Foaming Sensor (Vac Chamber)  
**P9<sup>2</sup>** Phosphate ester fluid compatibility modification  
**O** PM-1 On-Board Particle Monitor  
**S<sup>3</sup>** Stainless components for salt water removal  
**S9<sup>4</sup>** Skydrol fluid compatibility modification  
**T** Hose kit (suction & return hoses + wands)  
**V<sup>5</sup>** Inlet control valve (for positive head inlet)  
**W** Water Sensor With Display

<sup>1</sup>Heater is dependent on power option

<sup>2</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>3</sup>Only available on V1S model.

<sup>4</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>5</sup>Recommended option.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# COT

## Turbine Oil Conditioning Skids

Remove harmful particulate and water contamination and achieve target ISO Codes faster with the COT.

Ideal for preventing unplanned downtime and premature component failures in turbine lube systems.

Donaldson.  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



## Size matters.

COT optimizes coalesce and separator flow density to rapidly remove gross free water ingress during steam turbine start-up or in the event of a seal leak. High single pass water removal efficiency that keeps up with ingress so your bearings don't see free or emulsified water.



## Filtration starts with the filter(s).

COT combines high efficiency single pass particulate and water removal to ensure that your turbine oil is always in spec, eliminating premature component failures and downtime. With particulate media options down to  $\beta_{3_{|c|}} > 4000$  and 100% synthetic coalesce/separator elements that remove all free and emulsified water down to saturation point, your turbines will be protected and running more efficiently than ever.

## Setting the new standard.

Sampling and preventative maintenance are no longer optional, they're a necessity. That's why every COT comes standard with properly positioned sample ports to arm you with access to consistently accurate system conditions and letting you know exactly how well your filtration is performing.



## Take control of your systems.

Smart relay and auto water drain make COT a 24/7 unattended, easy-to-operate solution that functions as an in-line contamination barrier for every drop of turbine oil that goes into your turbines. Optional PLC touchscreen enables custom programming so your COT can purify reservoirs on your schedule and even data log ISO Codes and water removal rates so you know your lube is clean and reliable when you're on and off the clock.

## You can't beat the heat.

With no direct contact with the heating element, your turbine oil will safely and quickly get up to temperature without the risk of burning. The programmable temperature control with integral no-flow switch prevents oil damage and allows you to heat your fluids at your own pace. And what's more: all this comes standard on every COT.



## Built to exceed your expectations.

Flexible dimension and process arrangement are available with every COT so you get the perfect contamination solution for your turbine lubrication system. Even choose from explosion proof models and color coordinate to fit perfectly with your existing safety standards for the ultimate system in turbine oil conditioning.


# The COT Process

## How it works


Oil from the system entering the COT through a positive displacement gear pump passes through low watt density heat to achieve the optimum turbine oil temperature for efficient liquid-liquid separation by coalesce, >100°F (38°C).

The first stage of oil conditioning is particulate removal by  $\beta_{3_{cl}} > 4000$  high efficiency glass media element. Next, the oil enters the two stage coalesce vessel where the oil passes through 100% synthetic media coalesce elements. The free and emulsified water coalesces to form larger droplets that overcome the specific gravity of the oil and drop to the bottom of the vessel. Stage two in the coalesce vessel is the separator/post-filter element that functions as a water barrier for emulsified and small droplets of water that have not reached a size large enough to drop out of suspension. After passing through the water barrier, the oil passes through a final stage of particulate removal filtration by  $\beta_{3_{cl}} > 4000$  media to achieve even lower operating ISO Codes.

The coalesce vessel will achieve single pass water removal from 5000 ppm to <150 ppm under normal operating conditions and oil health. As water collects in the bottom of the coalesce vessel, a specific gravity float reaches a limit indicator that will open the automatic water drain valve and eject the separated water as it is removed to allow for 24/7 continuous operation. When fitted with a totalizing meter on the water drain line, quantity and timing for water removal can be established.

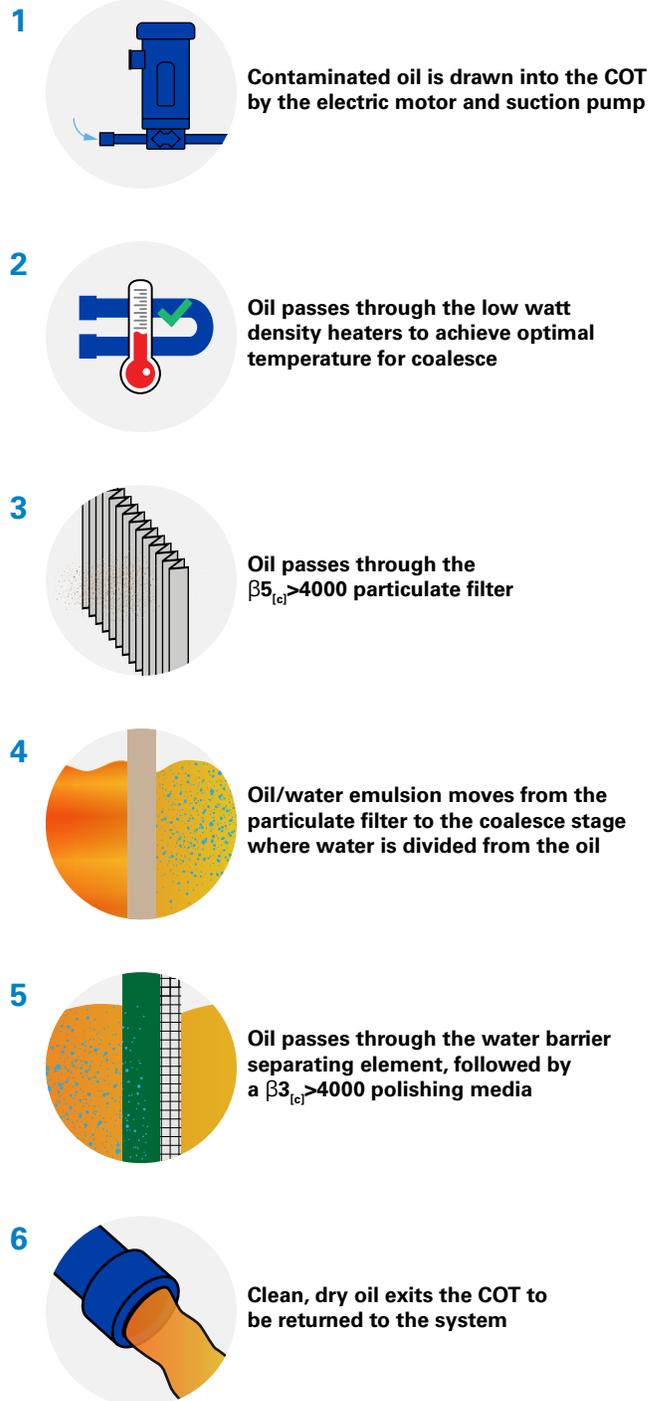

# The COT Process

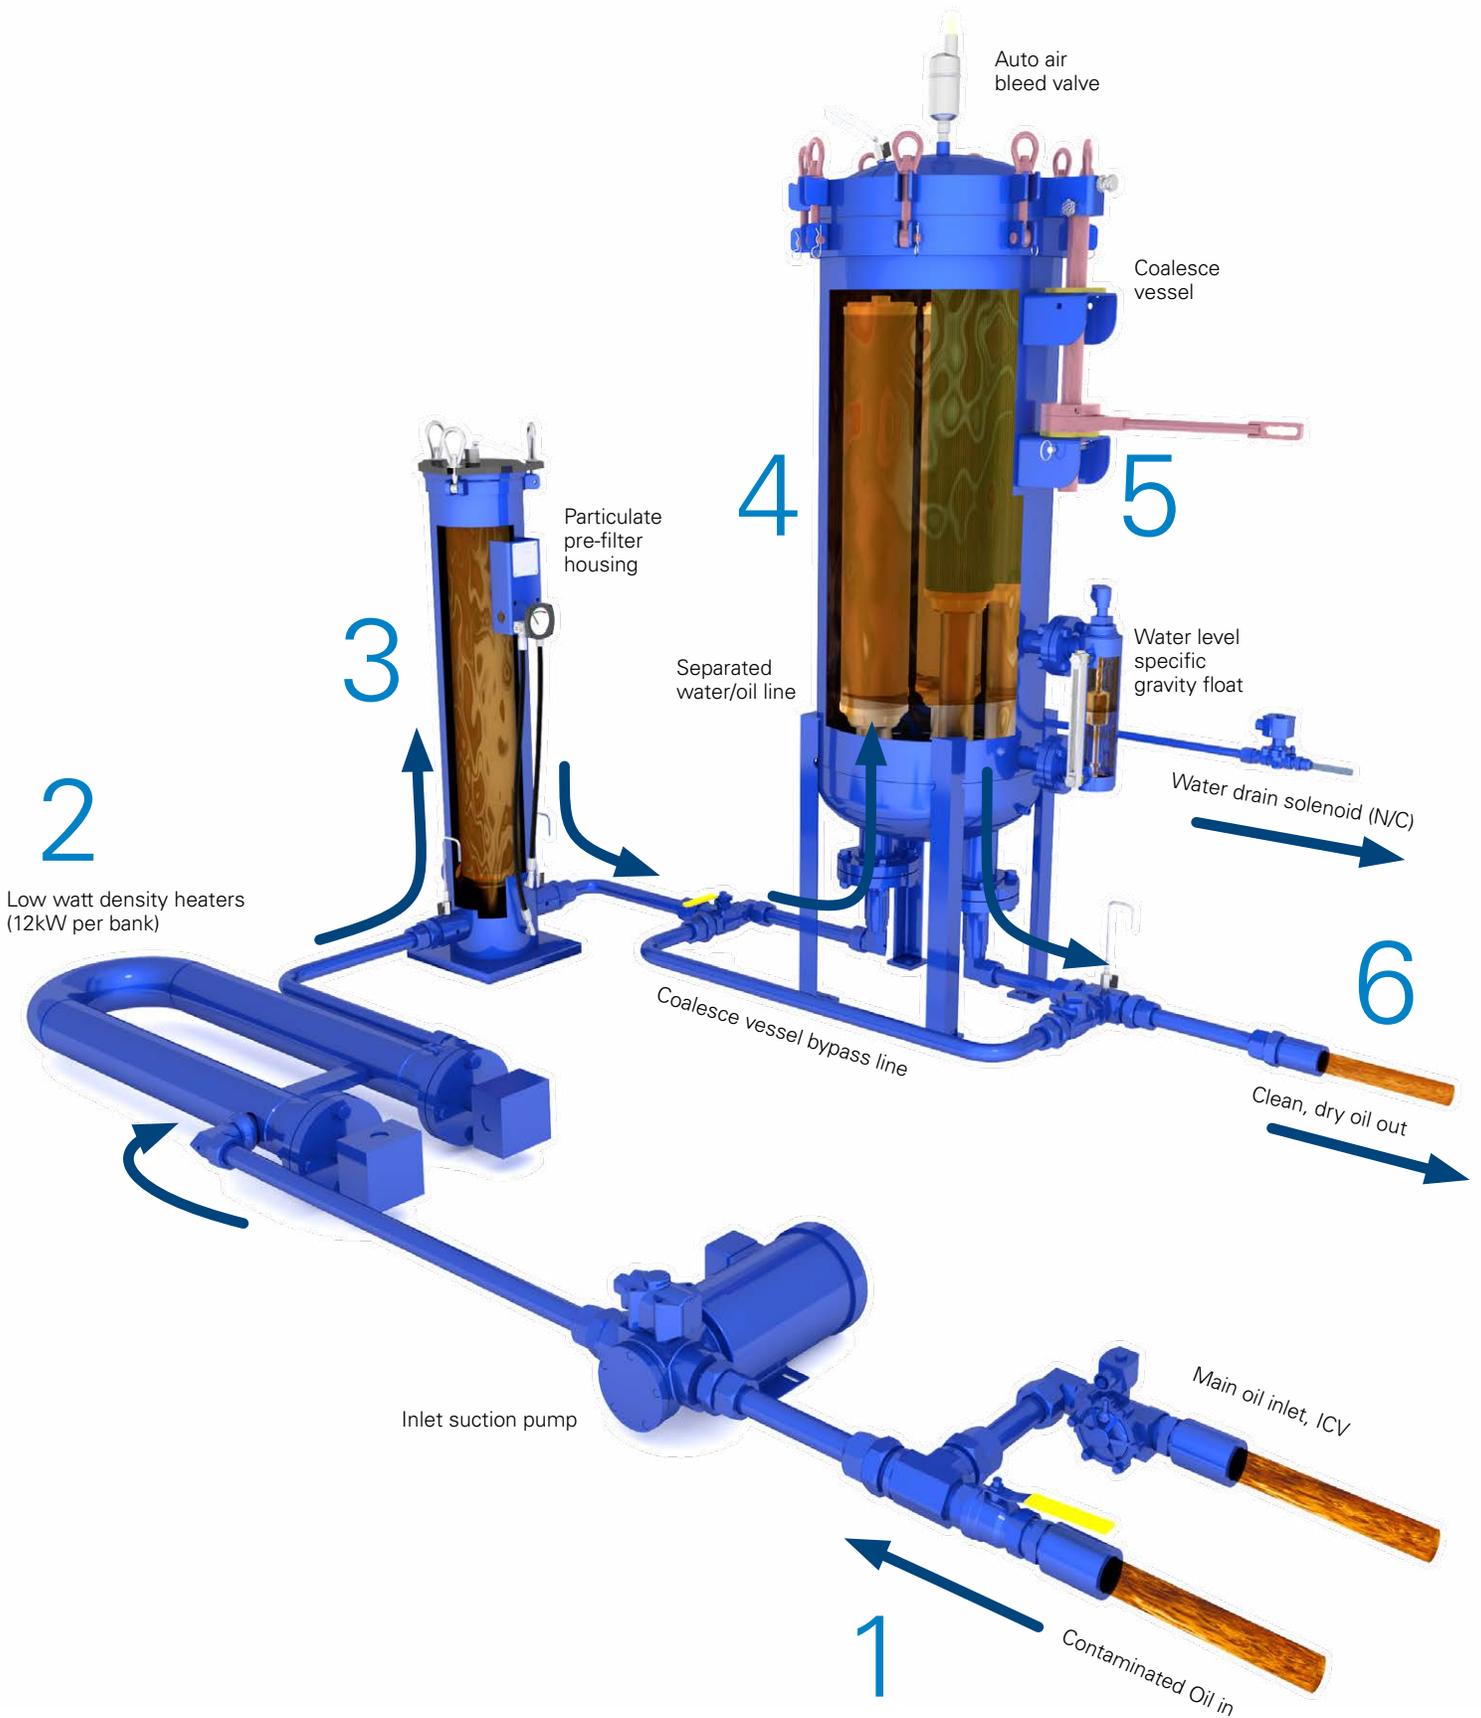

# COT Specifications

Model	COT5	COT10	COT30	COT60	COT100
Max Reservoir Size	800 gallons (3000 liters)	1600 gallons (6000 liters)	4000 gallons (15100 liters)	8000 gallons (30300 liters)	13250 gallons (50200 liters)
Height <sup>1</sup>	65" (165 cm)	83" (211 cm)	88" (224 cm)	88" (224 cm)	100" (254 cm)
Length <sup>1</sup>	56" (142 cm)	60" (153 cm)	84" (213 cm)	84" (213 cm)	96" (244 cm)
Width <sup>1</sup>	32" (81 cm)	40" (102 cm)	40" (102 cm)	60" (153 cm)	60" (153 cm)
Approximate Weight <sup>1</sup>	1400 lbs (635 kg)	2000 lbs (907 kg)	2700 lbs (1225 kg)	3400 lbs (1542 kg)	4400 lbs (1996 kg)
Inlet <sup>2</sup>	1" (2.5 cm)	1.5" (4 cm)	2" (5 cm)	3" (7.5 cm)	3" (7.5 cm)
Outlet <sup>2</sup>	1" (2.5 cm)	1" (2.5 cm)	1.5" (4 cm)	2" (5 cm)	3" (7.5 cm)
Motor Size	1 hp	1.5 hp	5 hp	7.5 hp	10 hp
Pre-Filter Elements	1 - 18" Prefilter Element 1		1	2	3
Coalesce Elements	1 x HP538L38-CS3MV <sup>3</sup>	2 x HP731L39-CV	5 x HP731L39-CV	8 x HP731L39-CV	10 x HP731L39-CV
Separator/ Polish Elements	(combination element)	1 x HP582L30-S1MV	3 x HP582L30-S1MV	5 x HP582L30-S1MV	9 x HP582L30-S1MV
Seals	Fluorocarbon				
Operating Temperature	<b>Fluid Temperature</b> 32°F to 200°F (0°C to 93°C)		<b>Ambient Temperature</b> 40°F to 104°F (4°C to 40°C)		
Materials of Construction	<b>Housings</b> Carbon steel with industrial coating		<b>Frame</b> Carbon steel with industrial coating		
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$		<b>Coalesce/Separator</b> Coalesce: 100% synthetic fiber media Separator: TEFLON® coated screen (water barrier)		
Fluid Compatibility	Mineral based turbine oil, call factory for synthetic. Cannot be used with AW hydraulic oils or phosphate esters. For water removal in AW hydraulic oils and phosphate esters, see VUD (page 136).				


<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Female pipe port.

<sup>3</sup>HP538L38-CS3MV element combines coalesce and separator element functions into a single element.

TEFLON® is a registered trademark of DuPont.

# COT Part Number Builder



**Flow Rate<sup>1</sup>**

<b>5</b>	5 gpm (18.9 lpm)
<b>10</b>	10 gpm (37.9 lpm)
<b>30</b>	30 gpm (114 lpm)
<b>60</b>	60 gpm (225 lpm)
<b>100</b>	100 gpm (379 lpm)

<b>Power Options</b>	<b>60 Hz, 1750 RPM</b>	<b>50 Hz, 1450 RPM</b>
	<b>23<sup>2</sup></b> 230 V ac, 3P <b>46</b> 460 V ac, 3P <b>57</b> 575 V ac, 3P	<b>38</b> 380 V ac, 3P <b>41</b> 415 V ac, 3P <b>52</b> 525 V ac, 3P

**Heat Capacity**

<b>12</b>	12 kW
<b>24</b>	24 kW
<b>36<sup>3</sup></b>	36 kW
<b>48<sup>3</sup></b>	48 kW
<b>64<sup>3</sup></b>	64 kW
<b>72<sup>3</sup></b>	72 kW
<b>80</b>	80 kW
<b>84<sup>3</sup></b>	84 kW
<b>X</b>	No heaters

**Seal**

<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon

**Special Options**

<b>8</b>	8" (20 cm) solid wheel upgrade
<b>A<sup>4</sup></b>	Auto water drain (manual drain included)
<b>B</b>	Adjustable coalesce vessel bypass loop
<b>C</b>	CE marked for machinery safety directive 2006/42/EC
<b>D</b>	DP Indicator Switch
<b>J<sup>3</sup></b>	Individual heater selector switches for limited amp circuits
<b>K</b>	Sight flow indicator
<b>L</b>	Lifting Eye Kit
<b>M</b>	Water discharge totalizing meter
<b>O</b>	On-board PM-1 particle monitor & clean oil indicator light
<b>P</b>	PLC touch screen control (does not include VFD)
<b>S</b>	Oil sensing safety shut-off in water discharge line
<b>T<sup>4</sup></b>	10' (3 m) hose kit + wands (JIC female connections)
<b>U</b>	50' (15 m) electrical cord (no plug supplied)
<b>V</b>	Inlet control valve (for positive head application)
<b>X</b>	Explosion proof. Consult factory for other explosion proof options.
<b>Y</b>	VFD variable speed motor frequency control

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Only available with COT5.

<sup>3</sup>Possible high full amp load (consider special option J).

<sup>4</sup>Recommended option.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.



# FCLCOT

## Turbine Oil Conditioning Filter Cart

A mobile solution that maintains turbine lube oil by removing water and particulate contamination that can cause corrosion, fluid breakdown, abrasive wear on components, additive precipitation, reduced lubricity, and dielectric strength loss.

Ideal for turbine lube oil, boiler feed pumps, compressors and others R&O applications.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)

## Filtration starts with the filter(s).

FCLCOT combines high efficiency single pass particulate and water removal to ensure that your turbine oil is always in spec, eliminating premature component failures and downtime. With particulate media options down to  $\beta_{3|C1} > 4000$  and 100% synthetic coalesce/separator elements that remove all free and emulsified water down to 50 ppm, your turbines will be protected and running more efficiently than ever.




## Cleaner fluids: greater efficiency.

Water and particulate contamination in turbine oils can lead to decreased output efficiency, metal etching, fluid breakdown, and abrasive wear in hydraulic components among many other costly issues. With a single pass through the FCLCOT, you'll not only remove harmful contaminants but increase your uptime and promote the best environment for your turbine to operate efficiently.

## Never stops working.

Designed for 24/7 unattended operation, FCLCOTs with auto water drain technologies provide you with the safety and security to know your turbine oil is clean and dry even when you're off the clock.

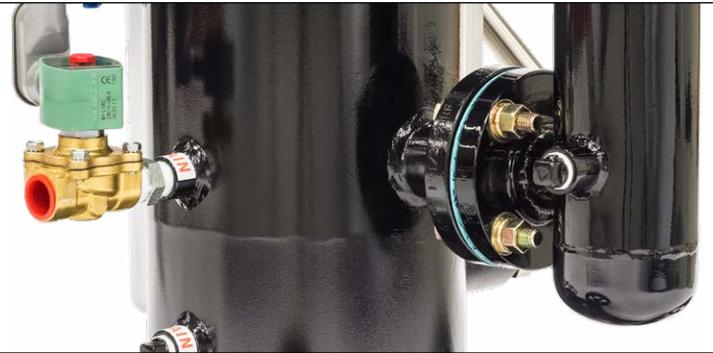

## Unmatched on the move.

Non-shredding, never flat wheels and easy to maneuver cart design with ergonomic handle mean you get powerful filtration exactly when and where you need it.

## Setting the new standard.

Sampling and preventative maintenance are no longer optional, they're a necessity. That's why every FCLCOT comes standard with properly positioned sample ports to arm you with access to consistently accurate system conditions and letting you know exactly how well your filtration is performing.



## Completely customizable.

Whether you need the heavy duty off-road tires for greater mobility or add one of several inlet strainer options, each and every FCLCOT can be built specifically to suit your needs. And with options for both convenience and tailoring for specific applications, you'll be sure to get the perfect solution for all your contamination problems.



# FCLCOT Specifications


<b>Dimensions<sup>1</sup></b>	<b>Height</b> 62" (158 cm)	<b>Width</b> 30.5" (77 cm)	<b>Depth</b> 29" (74 cm)	<b>Approximate Weight</b> 379 lbs (172 kg)
<b>Connections</b>	<b>Inlet</b> 1" male JIC	<b>Outlet</b> 1" male JIC	<b>Hoses</b> 1" x 10 ft (2.4 m)	
<b>Element Configuration</b>	<b>Particulate filter</b> HP110NL11-3MV		<b>Coalesce/Separator Filter</b> HP538L38-CS3MV	
<b>Seals</b>	Fluorocarbon			
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 80°F to 250°F (27°C to 121°C)		<b>Ambient Temperature</b> 40°F to 104°F (4°C to 40°C)	
<b>Materials of Construction</b>	<b>Housings</b> Carbon steel with industrial coating	<b>Hoses</b> Reinforced synthetic	<b>Wands</b> Stainless steel	
<b>Electric Motor</b>	TEFC, 56-145 frame 0.5 – 1 HP, 900 – 1750 RPM			
<b>Motor Starter</b>	MSP (motor starter/protector) in an IP55, enclosure with short circuit and overload protection.			
<b>Electric Connection</b>	Voltages 230 V ac and under, single phase: 35' (11 m) retractable cord reel included. Power Option 12 includes NEMA 5-15 plug. Voltages over 230 V ac: 35' (11 m) power cord included.			
<b>Pump</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.			
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar)			
<b>Pneumatic Option Air Consumption</b>	~40 cfm @ 80 psi <sup>2</sup> 35' (11 m) retractable air hose included when pneumatic option selected. Replaces 35' (11m) electric cord reel.			
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{cl}} \geq 4000$		<b>Coalesce/Separator</b> Coalesce: 100% synthetic fiber media Separator: TEFLON® coated screen (water barrier)	
<b>Fluid Compatibility</b>	Mineral based turbine oil, call factory for synthetic. Cannot be used with AW hydraulic oils or phosphate esters. For water removal in AW hydraulic oils and phosphate esters, see VUD.			
<b>Hazardous Environment Options</b>	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Power Option X selected, no electrical cord or cord reel will be included.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

<sup>2</sup>Air consumption values are estimated maximums and will vary with regulator setting.

TEFLON® is a registered trademark of DuPont.

# FCLCOT Part Number Builder

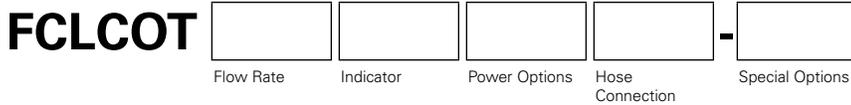

<b>Flow Rate<sup>1</sup></b>	<b>05</b>	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	<b>1</b>	1 gpm (3.7 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)
	<b>2</b>	2 gpm (7.5 lpm)	1450 RPM (50Hz) / 1750 RPM (60Hz)

<b>ΔP Indicator<sup>2</sup></b>	<b>D</b>	22 psid visual gauge + electric switch
	<b>E</b>	22 psid visual gauge

<b>Power Options</b> Contact factory for options not listed	<b>60 Hz</b>		<b>50 Hz</b>		<b>Pneumatic</b> <b>00</b> Pneumatically driven air motor & PD pump. FRL & flow meter included.
	<b>12</b>	120 V ac, 1P	<b>11</b>	110 V ac, 1P	
	<b>22</b>	208-230 V ac, 1P	<b>21</b>	220 V ac, 1P	
	<b>23</b>	208-230 V ac, 3P	<b>40</b>	380-440 V ac, 3P	
	<b>46</b>	460-480 V ac, 3P	<b>52</b>	525 V ac, 3P	
<b>57</b>	575 V ac, 3P				

**Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use**

**X\_\_** Add X prefix to power option listed above. Not available with (00) Pneumatic Option.

<b>Hose Connection</b>	<b>G</b>	Female BSPP swivel hose ends, no wands
	<b>S</b>	Female JIC swivel hose ends, no wands
	<b>W</b>	Female JIC swivel hose ends, with wands

<b>Special Options</b>	<b>A1</b>	Electrically powered automatic water drain
	<b>B</b>	Complete filter bypass line
	<b>C</b>	CE marked for machinery safety directive 2006/42/EC
	<b>D<sup>3</sup></b>	High filter ΔP auto shutdown
	<b>E</b>	100 mesh cast iron basket strainer
	<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
	<b>G</b>	Spill retention pan with fork guides (industrial coated steel)
	<b>H1</b>	10 ft (3 m) return line hose extension
	<b>H2</b>	20 ft (6 m) return line hose extension
	<b>J</b>	Add pressure gauge between pump & filter assembly
	<b>K</b>	HP75L8-149W Spin-On suction strainer
	<b>L</b>	High filter element ΔP indicator light
	<b>M</b>	Total system flow meter (120 cSt max)
	<b>N</b>	PM-1 ready (plumbing only)
	<b>O<sup>4</sup></b>	On-board PM-1 particle monitor & clean oil indicator light
	<b>R<sup>5</sup></b>	Spill retention pan with wheels (industrial coated steel)
	<b>S<sup>6</sup></b>	All wetted components 303 or higher stainless steel
<b>T<sup>7</sup></b>	Foam filled off-road tires for rugged environment	
<b>U</b>	CUL and/or CSA marked starter enclosure for Canada	
<b>W</b>	Automatic air bleed valve	
<b>Z</b>	On site start-up training	

<sup>1</sup>Nominal flow rates at 60 Hz motor speeds.

<sup>2</sup>Particulate filter only. Coalesce housing is equipped with sliding differential indicator.

<sup>3</sup>"D" Option includes "L" option, do not add to part number. "D" Option required DP Indicator option with electric switch to be selected ("D").

<sup>4</sup>PM-1 will not function properly in the presence of free or emulsified water at or above saturation point. If selected, PM-1 is installed downstream of the filtration.

<sup>5</sup>"R" Option includes "G" option, do not add to part number.

<sup>6</sup>With exception to cast iron gear pump.


<sup>7</sup>"T" Option not available with "G & R" options.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# RHD

## Reservoir Headspace Dryer


The Reservoir Headspace Dryer is our adaptable solution for moisture management in hydraulic and lubrication reservoirs. Available in two sizes, RHD is unique in its ability to properly match a range of reservoir capacities. RHD is both high quality and cost effective for purchase and ongoing maintenance. Through a highly effective, non-mechanical process, the Reservoir Headspace Dryer helps remove all 3 forms of water from lubricants and hydraulic fluids.

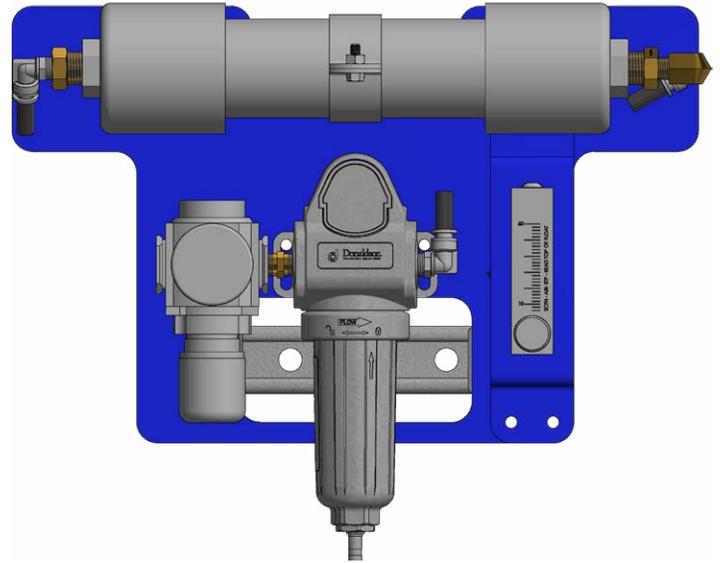

Donaldson  
HY-PRO™

hyprofiltration.com/

\*Please check with your distributor on availability.

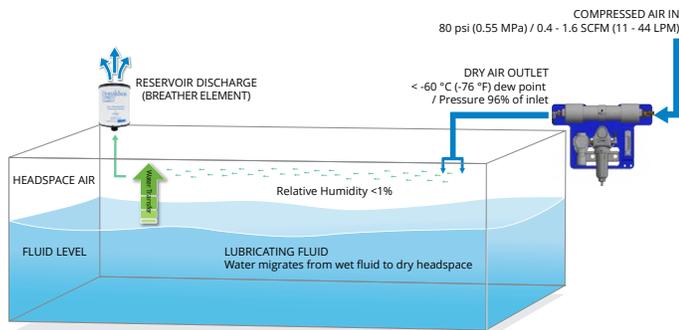


### Remove water: protect your systems.

With the Reservoir Headspace Dryer, dry air is generated at the source, providing unlimited capacity to reduce existing moisture in the reservoir and oils. The water is released from the oil to the super dry air. The Reservoir Headspace Dryer is a maintenance solution that will maintain water at very low levels (<math>< 50\text{ ppm}</math> total or in the ideal range between 200~300 ppm for EHC fluids), reducing the rate of lubricant break-down.

### Eliminate water at its source.

Free flowing dry air is exhausted out of the breather element, reversing the typical flow configuration of reservoir air and eliminating one of the key ingress points for water and particulate contamination.

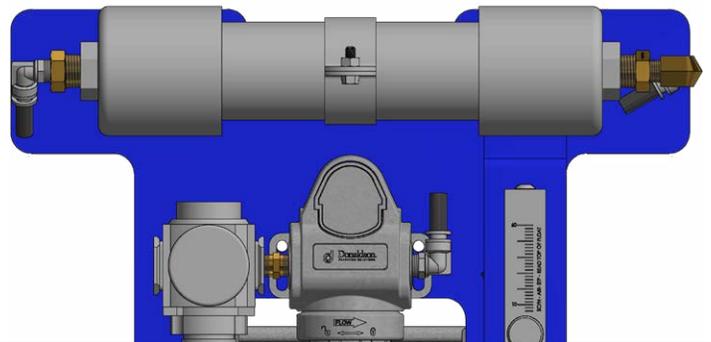

### Extend your fluid life.

A properly sized Reservoir Headspace Dryer is designed to remove up to 100 ppm of water per day under normal operating conditions to minimize oxidation and fluid breakdown and extend the useful life of your oil while protecting your critical components.

# RHD Specifications

Height <sup>1</sup>	<b>50</b>	13.41" (34.1 cm)			
	<b>300</b>	13.41" (34.1 cm)			
Width <sup>1</sup>	<b>50</b>	16.50" (41.9 cm)			
	<b>300</b>	16.80" (42.7 cm)			
Depth <sup>1</sup>	<b>50</b>	6.59" (16.7 cm)			
	<b>300</b>	6.59" (16.7 cm)			
Approximate Weight <sup>1</sup>	<15 lbs (<6.8 kg)				
Inlet / Outlet / Drain Plug	¼" NPT				
Coalescer Drain	Automatic Float Type				
Max Working Pressure	180 psi (1241 kPa / 12.50 bar)				
Max Operating Temperature	125°F (52°C)				
Mounting Bracket	Accommodates 1/2" hardware				
Inlet Conditions	100 psi (7 bar), 95°F (35°C)				
Outlet Pressure Dew Point	59°F (15°C)	37°F (3°C)	-4°F (-20°C)	-40°F (-40°C)	
Percentage Purge	10%	14%	21%	29%	
Inlet Air Flow scfm (slpm)	<b>50</b>	1.8 scfm (50 slpm)	1.3 scfm (36 slpm)	0.8 scfm (24 slpm)	0.6 scfm (17 slpm)
	<b>300</b>	10.6 scfm (300 slpm)	7.5 scfm (213 slpm)	5.0 scfm (142 slpm)	3.6 scfm (103 slpm)
Purge Air scfm (slpm)	<b>50</b>	0.2 scfm (5 slpm)			
	<b>300</b>	1.0 scfm (29 slpm)			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.


## RHD Part Number Builder

**RHD** -   
Model

Model **50<sup>2</sup>**  
**300<sup>2</sup>**

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

<sup>2</sup>Reservoir Reservoir Headspace should be calculated to ensure proper air flow for optimal drying in your application. Suggested replacement of pre filter every 6 months, more frequent for extremely dirty or wet conditions.

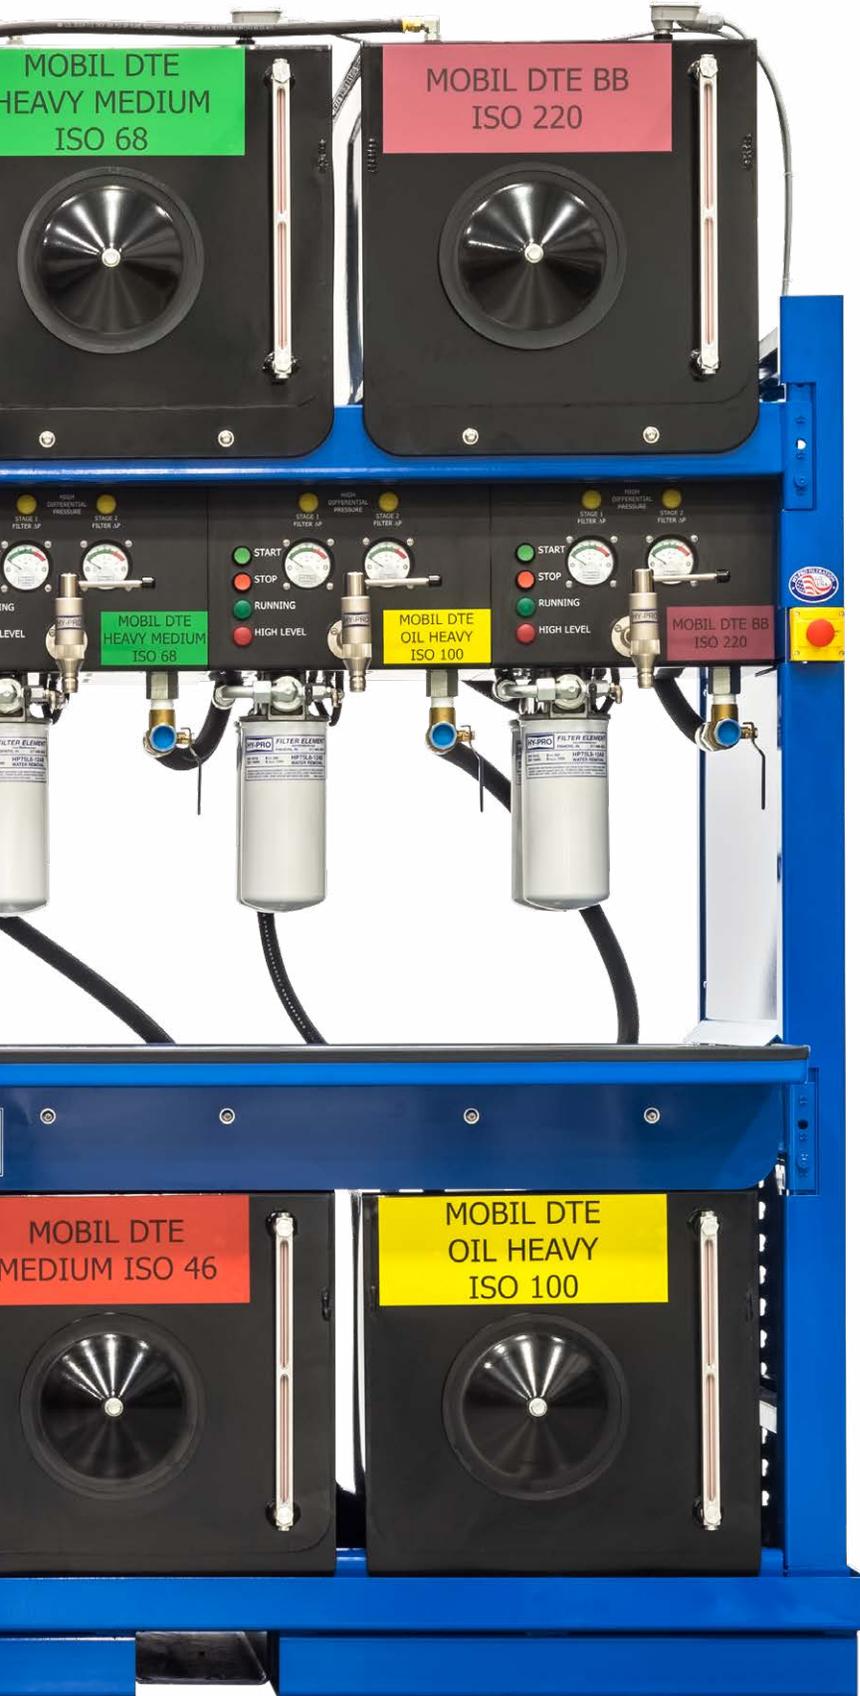

# LCS

## Liquid Conditioning Station

Begin filtration and contain contamination before it ever enters your plant to protect your equipment and your bottom line. Built with your convenience in mind and completely customizable for size and fluids, the LCS is a complete contamination solution for hydraulic and lube oil storage and handling.

Donaldson  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)

## Everything you need. Within arms reach.

Your day at work is hard enough. That's why we've built the LCS with your convenience in mind. Everything you need, conveniently placed for maximum accessibility. From start-up to clean up, all of your daily activities come without the need for a ladder.



## Say goodbye to cross contamination.

Dedicated pump, filter and plumbing for each tank maintain fluid integrity and allow multiple fluids to be filtered exclusively and simultaneously.



## The best in filtration<sup>3</sup>.

Filter fluids as they are added to and dispensed from the reservoirs. Recirculate fluids inside the reservoirs for a third level of unparalleled fluid cleanliness and unimaginably low ISO Codes. And with DFE rated media options down to  $\beta_{10} \geq 4000$  you can be sure contamination stays exactly where you want it: out of your fluid.



## Take control of your systems.

The definition of brains and brawn, the control panel on the LCS regulates all the system operations so you can filter and dispense your fluids worry-free. Tucked back and out of the way, once you're up and running you might as well forget it's even there.



## Size matters.

Packed with as many reservoirs as your heart desires, the LCS is a behemoth with power that can't be denied. With space for 70 gallons of fluid in each standard reservoir, you can kiss the rows of scattered oil drums goodbye. Or if 70 gallons isn't enough for you, reservoirs can be sized up to 250 gallons so you'll have all your fluids clean, dry, and in one place.



## Perfectly tailored to fit your needs.

Label designs, symbols and colors are tailored for each fluid to fit your existing safety and identification standards. To take it even further, each filtration system is set up specifically for the type and viscosity of its specific fluid, meaning you get the perfect contamination solutions for each and all of your fluids.



## Minimize the mess.

Dual drip pans allow draining spent filters directly within the Workstation, eliminating oily filter transfer and subsequent oil clean-up.



## Setting the new standard.

Sampling and preventative maintenance are no longer optional, they're a necessity. Knowing your fluids are clean is the first step in prolonging the life of your systems and critical components. That's why every LCS comes standard with easy-to-access sample ports in their proper positions so you can always know you're putting clean oils into your systems.



## A breath of fresh air.

With built in check valves (0.1 psi, 0.007 bar) to maximize lifespans, Hy-Dry desiccant breathers on each reservoir help remove water contamination from your oils and prevent cross contamination between fluids.



## Let there be light.

Integrated LED lights illuminate the Workstation for dispensing fluid, changing elements and reading gages even in poorly lit environments.

## Built for industrial use.

Rated to hold 5000 pounds each, the tiered shelves and rock solid frame will handle your plant's filtration needs without breaking a sweat.




## LCSX Add-on Kit


For applications with existing tanks or for building your own lube room, the LCSX Add-on Kit provides all the filtration of the LCS in a self-contained, drop-in platform perfect for as many units as you desire and expanding on your time.



# LCSW Installation Drawings

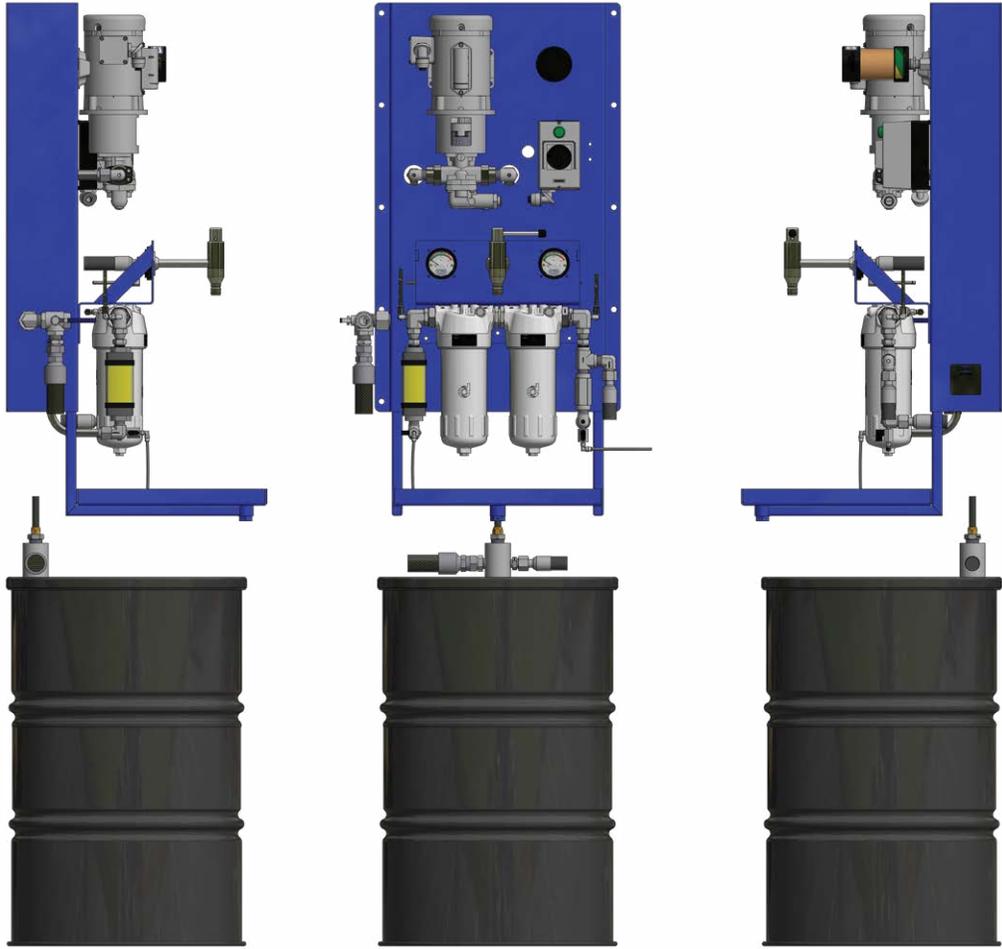

# LCSB Installation Drawings

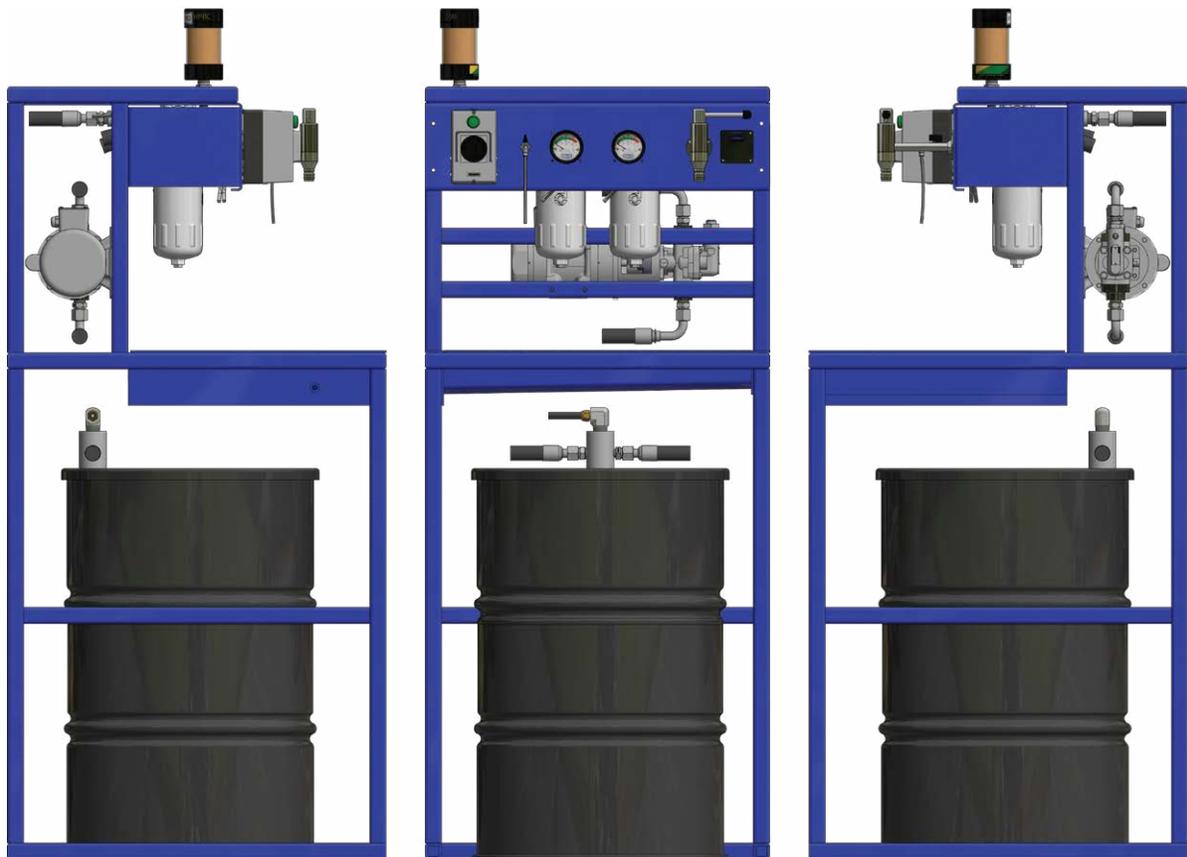

# LCS Specifications

## Consult Factory for Part Numbers & Pricing

Model	LCS2	LCS4	LCS6			
Height	96" (244 cm)	96" (244 cm)	96" (244 cm)			
Width	50" (127 cm)	88" (235 cm)	112" (285 cm)			
Depth	60" (152 cm)	60" (152 cm)	60" (152 cm)			
Inlets	1" FNPT	1" FNPT	1" FNPT			
Outlets	Open Nozzle + ¾" Male QD	Open Nozzle + ¾" Male QD	Open Nozzle + ¾" Male QD			
Filter Element Configuration	S75 Spin-On, S75D Spin-On, MF3, MF90, MF110 and optional 2 stage systems available					
Seals	Fluorocarbon or Nitrile (Buna)	Fluorocarbon or Nitrile (Buna)	Fluorocarbon or Nitrile (Buna)			
ΔP Gages	Sliding, Pop-Up, Visual 0-25 psid (1.7 bard) available.					
Operating Pressure	150 psi (10 bar) maximum standard					
Operating Temperature	50°F to 100°F (10°C to 38°C)	50°F to 100°F (10°C to 38°C)	50°F to 100°F (10°C to 38°C)			
Materials of Construction	<b>Reservoirs</b> Industrial coated steel	<b>Facing</b> Industrial coated steel	<b>Frame</b> Powder coated steel	<b>Grate</b> Aluminum	<b>Plumbing</b> Plated steel hydraulic fittings + stainless tubing	<b>Hoses</b> Reinforced synthetic
Reservoir Size	70 gal (265 liter), 150 gal (568 liter), 250 gal (946 liter) available standard. Contact factory for additional sizes.					
Electric	cUL listed industrial control panels. All voltages available.					
Electric Motors	TEFC, 56-184 frame 0.5 – 1 HP, 900 – 1750 RPM		TEFC, 56-184 frame 0.5 – 1 HP, 900 – 1750 RPM		TEFC, 56-184 frame 0.5 – 1 HP, 900 – 1750 RPM	
Motor Starter	MSP (motor starter/protector) with short circuit and overload protection.					
Pumps	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.					
Pump Bypass	Full bypass at 150 psi (10 bar) <sup>2</sup>					
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$		<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$		<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )	
Viscosity	10-5000 cSt					
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.					

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# LCSB/LCSW Specifications

## Consult Factory for Part Numbers & Pricing

<b>Model</b>	<b>LCSB</b>		<b>LCSW</b>		
<b>Height</b>	70.5" (179 cm)		60" (152 cm)		
<b>Width</b>	32" (81 cm)		27.5" (70 cm)		
<b>Depth</b>	35" (89 cm)		24" (61 cm)		
<b>Inlets</b>	1" FNPT		1" FNPT		
<b>Outlets</b>	Open Nozzle + ¾" Male QD		Open Nozzle + ¾" Male QD		
<b>Filter Element Configuration</b>	S75 Spin-On, S75D Spin-On, MF3, MF90, MF110 and optional 2 stage systems available				
<b>Seals</b>	Fluorocarbon or Nitrile (Buna)		Fluorocarbon or Nitrile (Buna)		
<b>ΔP Gages</b>	Sliding, Pop-Up, Visual 0-25 psid (1.7 bard) available.				
<b>Operating Pressure</b>	150 psi (10 bar) maximum standard				
<b>Operating Temperature</b>	50°F to 100°F (10°C to 38°C)		50°F to 100°F (10°C to 38°C)		
<b>Materials of Construction</b>	<b>Facing</b> Industrial coated steel	<b>Frame</b> Powder coated steel	<b>Grate</b> Aluminum	<b>Plumbing</b> Plated steel hydraulic fittings + stainless tubing	<b>Hoses</b> Reinforced synthetic
<b>Electric</b>	cUL listed industrial control panels. All voltages available.				
<b>Electric Motors</b>	TEFC, 56-184 frame 0.5 – 1 HP, 900 – 1750 RPM		TEFC, 56-184 frame 0.5 – 1 HP, 900 – 1750 RPM		
<b>Motor Starter</b>	MSP (motor starter/protector) with short circuit and overload protection.				
<b>Pumps</b>	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.				
<b>Pump Bypass</b>	Full bypass at 150 psi (10 bar) <sup>2</sup>				
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{IC}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{IC}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{IC}} \geq 2$ ( $\beta_x \geq 2$ )		
<b>Viscosity</b>	10-5000 cSt				
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.				

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

\*Barrel is not included.



# Custom Equipment

Application based contamination solutions tailored to meet your exact needs and exceed your expectations. Call Donaldson Hy-Pro for more information.

Donaldson.  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



## Super high viscosity.

Applications such as dragline mining require oils in excess of ISO VG 680 that were previously considered unfilterable. Across the mines of Canada for more than three years, our dragline optimized filter skids have been eliminating unplanned downtime and maintenance in fluids with viscosities as high as ISO VG 1500 and temperatures down to 0°C.



151

## Extreme temperatures.

Whether you're removing varnish from turbine oil in the deserts of the Middle East or particulate from lube oil in the frozen tundra of the Arctic Circle, Donaldson Hy-Pro can integrate specialized cooling and heating with smart controls to tackle contamination in any environment. Gearboxes running too hot? Donaldson Hy-Pro can design and build a dual function solution to condition the oil and maintain your ideal operating temperature.



## Compact size restrictions.

Overcrowded plants and streamlined vessels require careful consideration when integrating filtration systems. Engineered for maximum efficiency in minimal space, our filtration systems are designed to excel at maximizing your efficiency no matter the application or the space requirements.



## Mobile fluid handling.

Integrating fluid storage and mobility has never been easier with the ability to add reservoirs to any standard product line or a completely customized unit. Take clean fluids with you to top off reservoirs or completely replace discarded oil in as large of reservoirs as your heart desires.



## Explosion proof and code certified.

Navigating the red tape of safety classifications can be a nightmare. Take the hassle out of your filtration with systems designed and built to meet the regulations of nearly any certifications required.



## Color coordinated to safety standards.


While we think Donaldson Hy-Pro Blue is the perfect color for our equipment, all of our units can be tailored to meet your existing safety and identification standards.



# Filter Assembly Pressure Chart

## Assembly Type Key

- High Pressure Assembly
- Medium Pressure Assembly
- Low Pressure Assembly
- In-tank Assembly
- Duplexes Assembly

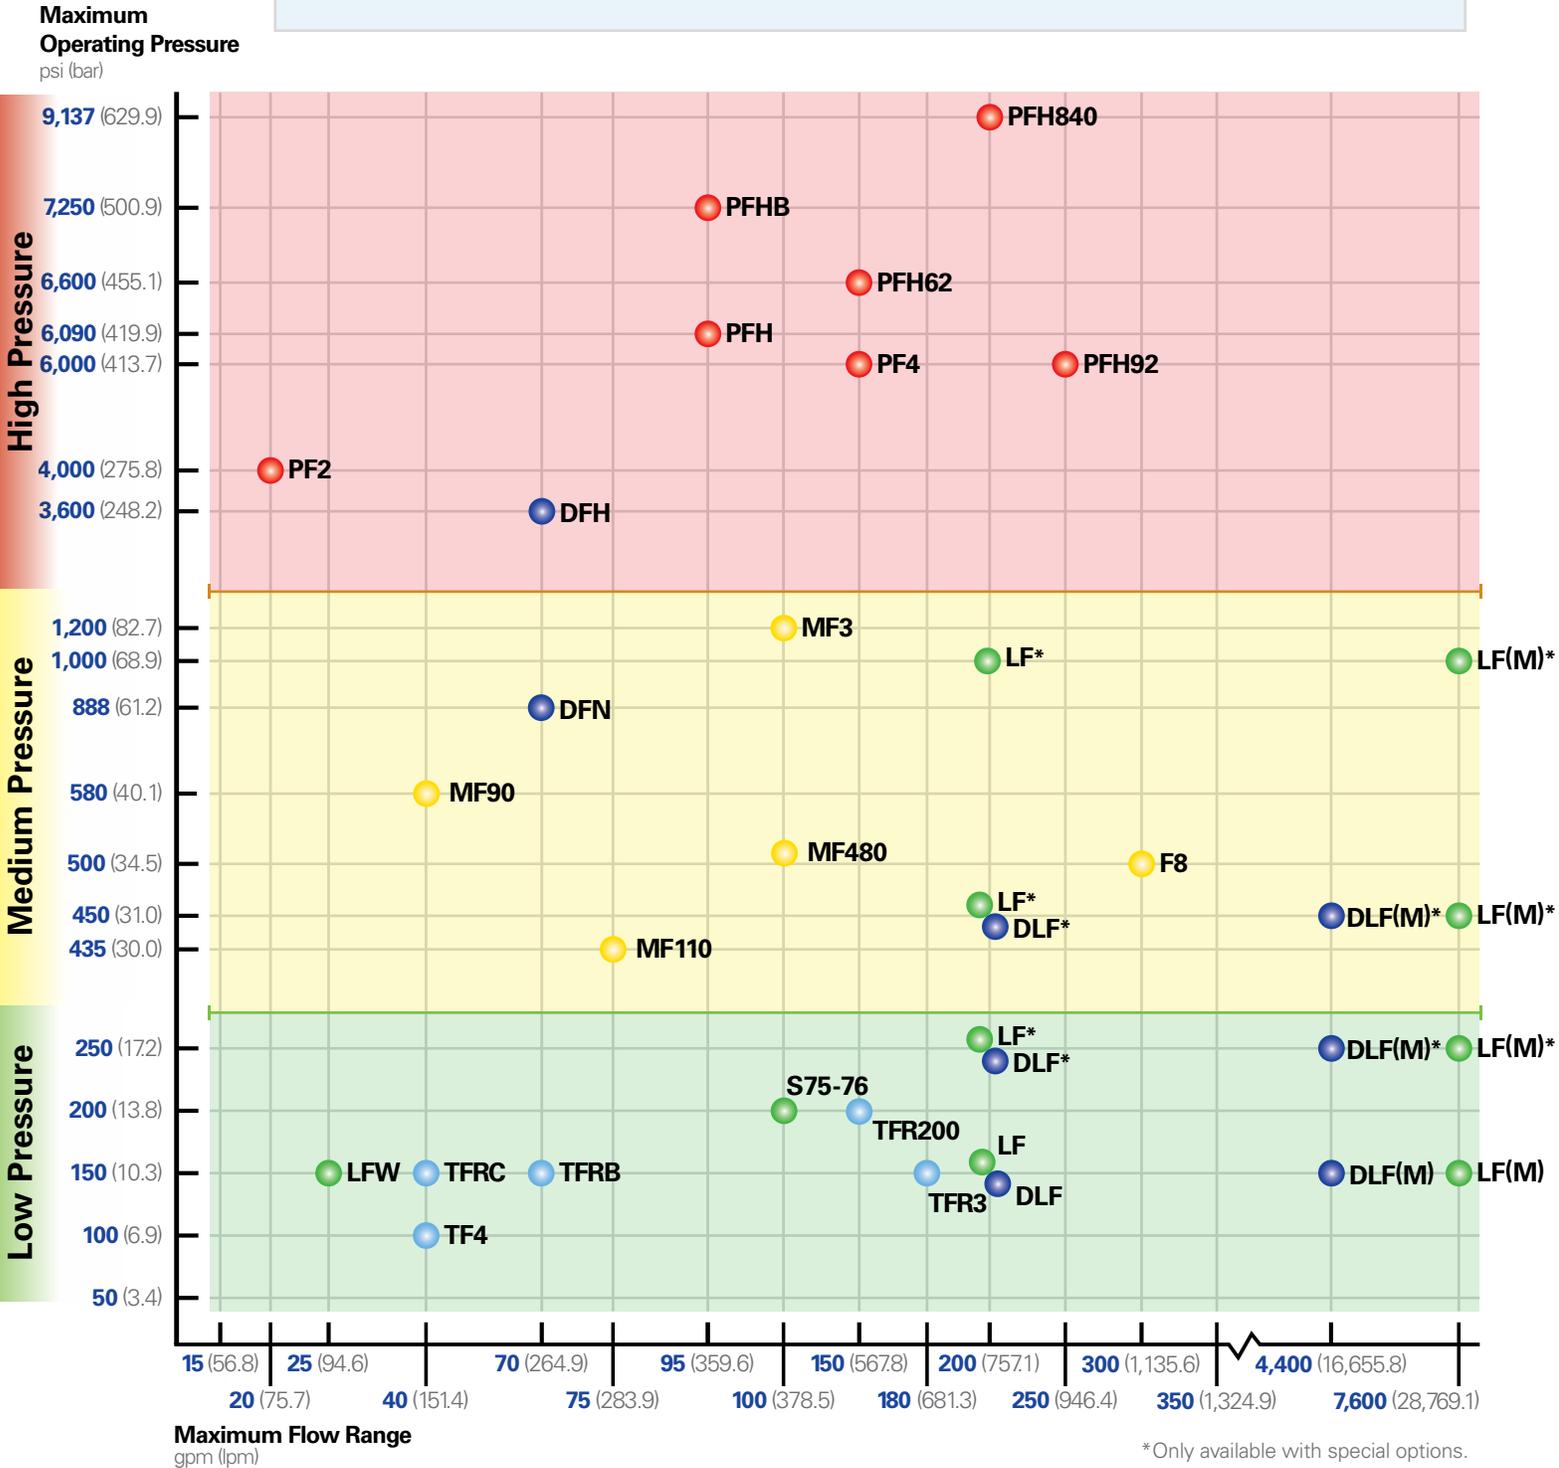

\* Only available with special options.

# Filter Assembly Pressure

## High Pressure Assembly



<b>PF2</b>	Max Operating Pressure: 4000 psi (275 bar)
<b>PF4</b>	Max Operating Pressure: 6,000 psi (414 bar)
<b>PFH</b>	Max Operating Pressure: 6090 psi (420 bar)
<b>PFH62</b>	Max Operating Pressure: 6,600 psi (455 bar)
<b>PFH92</b>	Max Operating Pressure: 6,000 psi (414 bar)
<b>PFH840</b>	Max Operating Pressure: 9137 psi (630 bar)
<b>PFHB</b>	Max Operating Pressure: 7250 psi (500 bar)

## Medium Pressure Assembly



<b>F8</b>	Max Operating Pressure: 500 psi (34.5 bar)
<b>MF3</b>	Max Operating Pressure: 1,200 psi (83 bar)
<b>MF90</b>	Max Operating Pressure: 580 psi (40 bar)
<b>MF110</b>	Max Operating Pressure: 435 psi (30 bar)
<b>MF480</b>	Max Operating Pressure: 508 psi (35.1 bar)

## Low Pressure Assembly



<b>LF(M)</b>	Max Operating Pressure: 150 psi (10 bar)
<b>LFW</b>	Max Operating Pressure: 150 psi (10 bar)
<b>S75-76</b>	Max Operating Pressure: 200 psi (13.8 bar)

## In-Tank Assembly



<b>TF4</b>	Max Operating Pressure: 100 psi (6.9 bar)
<b>TFR3</b>	Max Operating Pressure: 150 psi (10 bar)
<b>TFR200</b>	Max Operating Pressure: 200 psi (10 bar)
<b>TFRC</b>	Max Operating Pressure: 150 psi (10 bar)
<b>TFRB</b>	Max Operating Pressure: 150 psi (10 bar)

## Duplex Filter Assembly



<b>DLF(M)</b>	Max Operating Pressure: 150 psi (10 bar)
<b>DFH</b>	Max Operating Pressure: 3600 psi (248 bar)
<b>DFN</b>	Max Operating Pressure: 888 psi (61.2 bar)

# TF4

## In-Tank Filter Assembly

Ideal for installation on the return line to remove contaminant ingested or generated by the system.

**Max Operating Flow: 40 gpm (151 lpm)**

**Max Operating Pressure: 100 psi (6.9 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Elements that go beyond industry standard.

Donaldson Hy-Pro's DFE rated G8 dualglass elements are rated to assure performance even when exposed to the toughest conditions that hydraulic systems can generate. Designed to provide the best filtration and ease of use, the HP4C coreless element gives you more options for disposal, meaning you improve your environmental impact and your bottom line.



## Works with your system.


Available with one or two inlet ports (180° orientation) for maximum flexibility of installation, you'll be amazed at how easily the TF4 integrates into your system. For applications requiring AIAG HF4 automotive standards compliance, the H4 special option incorporates the HPK filter element to ensure you meet compatibility requirements and exceed efficiency expectations.

## Minimize the mess.

With most of the assembly inside the reservoir, the top loading housing on the TF4 provides easy and clean access when servicing or changing the element. To top it off, keyways on the twist open cover require only loosening of the bolts to access the element so lost parts during service becomes a thing of the past.



## TF4 Installation Drawing

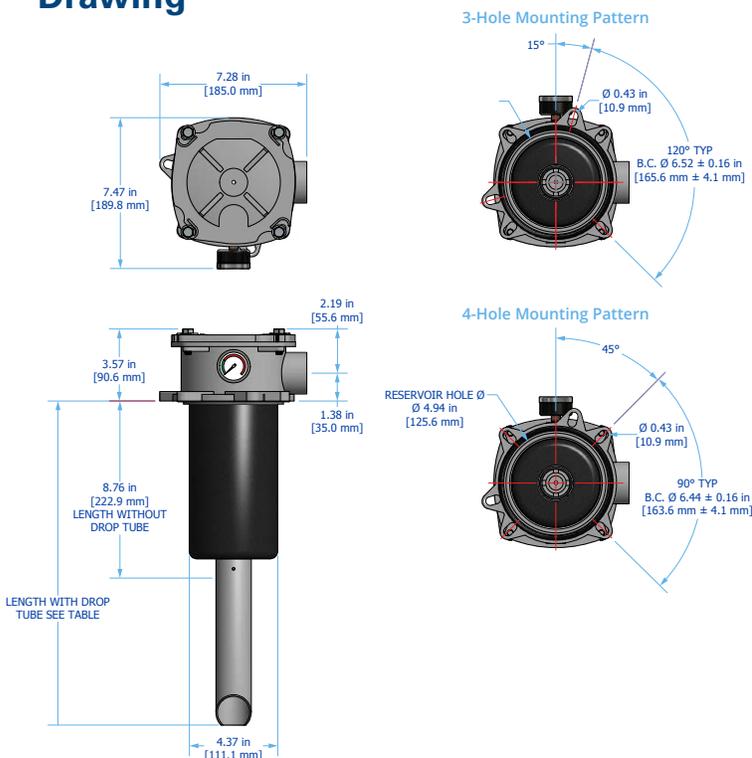

## The perfect fit.

Coming in at just over 7" (185 mm) in diameter, the TF4 is the perfect compact solution for keeping your mobile equipment or power units operating at peak performance. And with mounting patterns to fit both North American and European formats, you'll get clean oil and increased efficiency no matter where you are.

Drop Tube Option	Length including Drop Tube
4" Nominal Extension	14.3" (363 mm)
6" Nominal Extension	16.3" (414 mm)
8" Nominal Extension	18.3" (465 mm)
9" Nominal Extension	19.3" (490 mm)
10" Nominal Extension	20.3" (516 mm)
12" Nominal Extension	22.3" (566 mm)

# TF4 Specifications

**Dimensions** See Installation Drawings for model specific dimensions.

<b>Operating Temperature</b>	<b>Fluid Temperature</b>	<b>Ambient Temperature</b>
	30°F to 225°F (0°C to 105°C)	-4°F to 140°F (-20C to 60C)

**Operating Pressure** 100 psi (6.9 bar) maximum

**Pressure Switch Trigger** 22 psi (1.5 bar)

<b>Element Collapse Rating</b>	<b>HP4CL9</b>	<b>HPKL9</b>
	150 psid (10.3 bard)	290 psid (20 bard)

**Integral Bypass Setting** 25 psid (1.7 bard)

<b>Materials of Construction</b>	<b>Head</b>	<b>Bowl</b>
	Cast aluminum	Polyammide

<b>Media Description</b>	<b>M</b>	<b>A</b>	<b>W</b>
	G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{IC1}} \geq 4000$	G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{IC1}} \geq 4000$	Stainless steel wire mesh media $\beta_{x_{IC1}} \geq 2$ ( $\beta_x \geq 2$ )

**Replacement Elements** To determine replacement elements, use corresponding codes from your assembly part number:

<b>Configuration</b>	<b>Filter Element Part Number</b>	<b>Example</b>
Standard Filter Element	HP4CL9 – [Media Selection Code] [Seal Code]	HP4CL9–10AV
Special Option H4	HPKL9 – [Media Selection Code] [Seal Code]	HPKL9–6MB


**Fluid Compatibility** Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.

**Filter Sizing<sup>1</sup>** Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

$\Delta P$ Factors <sup>1</sup>	Units	Media						
		1M	3M	6M	10M	16M	25M	**W
	psid/gpm	0.2370	0.2000	0.1550	0.1390	0.1360	0.1310	0.0240
	bard/lpm	0.0043	0.0036	0.0028	0.0025	0.0025	0.0024	0.0004

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# TF4 Part Number Builder



Connection	Port Option	Max Flow Rate
	<b>G20</b> 1.25" BSPT	40 gpm (151 lpm) <sup>1</sup>
	<b>N20</b> 1.25" NPT	40 gpm (151 lpm) <sup>1</sup>
	<b>S20</b> 1.25" SAE	40 gpm (151 lpm) <sup>1</sup>

<b>Bypass</b>	<b>2</b>	Integrated bypass - 25 psid (1.7 bard)
---------------	----------	--

<b>Pressure Indicator</b>	<b>DX</b>	Electric pressure switch (DIN connection)
	<b>E</b>	Electric switch with flying leads (3-wire connection)
	<b>G</b>	Visual pressure gauge
	<b>X</b>	No indicator (port plugged)

<b>Special Options</b>	<b>D2</b> <sup>2</sup>	Dual inlet ports, 180° orientation
	<b>H4</b> <sup>3</sup>	HPK series element for automotive standards compatibility
	<b>4</b>	4" (10 cm) nominal drop tube extension
	<b>6</b>	6" (15 cm) nominal drop tube extension
	<b>8</b>	8" (20 cm) nominal drop tube extension
	<b>9</b>	9" (23 cm) nominal drop tube extension
	<b>10</b>	10" (25 cm) nominal drop tube extension
<b>12</b>	12" (30 cm) nominal drop tube extension	

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
	<b>1M</b> β <sub>3(c)</sub> ≥ 4000	<b>3A</b> β <sub>4(c)</sub> ≥ 4000	<b>25W</b> 25μ nominal
	<b>3M</b> β <sub>4(c)</sub> ≥ 4000	<b>6A</b> β <sub>6(c)</sub> ≥ 4000	<b>40W</b> 40μ nominal
	<b>6M</b> β <sub>6(c)</sub> ≥ 4000	<b>10A</b> <sup>3</sup> β <sub>11(c)</sub> ≥ 4000	<b>74W</b> 74μ nominal
	<b>10M</b> <sup>3</sup> β <sub>11(c)</sub> ≥ 4000	<b>25A</b> β <sub>22(c)</sub> ≥ 4000	<b>149W</b> 149μ nominal
	<b>16M</b> β <sub>16(c)</sub> ≥ 4000		
	<b>25M</b> β <sub>22(c)</sub> ≥ 4000		

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Available with S4 port only.

<sup>3</sup>Replaces standard HP4C series element with HPKL9. Use 12M or 12A for respective media code in place of 10M or 10A.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# TFR3

## In-Tank Filter Assemblies

Donaldson Hy-Pro TFR3 in-tank filter assemblies are ideal for particulate contamination removal at high flow rates in large hydraulic power units and mobile hydraulic OEM applications.

**Max Operating Flow: 225 gpm (852 lpm)**

**Max Operating Pressure: 150 psi (10 bar)**




[hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter.

Advanced DFE rated filter elements deliver lower operating ISO Codes with high efficiency particulate removal and retention efficiency. With a range of media options down to  $\beta_{3(c)} > 4000$  + water absorbing options, you get the perfect element for your application, every time.

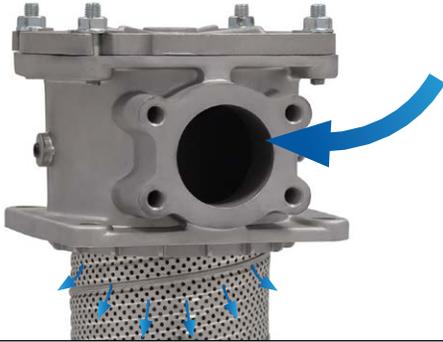

## Inside to out flow.

The dirtiest fluid in your system can be found before the filter element in the filter housing. Here, contaminants collect in the filter media and unless disposed of properly, can wreak havoc on your system after element service. That's why when you service the TFR3 element, which utilizes inside-to-outside flow, you remove all the dirt and contaminated fluid with the element.

## Integral element bypass.

TFR3 elements include an integral, zero-leak bypass valve. Every time an element is changed a new bypass is installed eliminating bypass valve fatigue and leakage over time.



## Minimize the mess.

The top loading TFR3 housing provides easy and clean access during element service, no slippery spin-ons to handle. With the keyway cover and bolt arrangement, lost parts during element service become a thing of the past.

## Sized for your system.




Choose from a range of different length elements and bypass valve settings to handle the flow rate and oil viscosity of your specific system.



## Eliminate aeration.



Smaller reservoirs with higher turnover and less settling time typically lead to aeration as fluids are churned and recirculated. The unique TFR3 element design minimizes turbulence and integral diffuser tube prevents aeration in compact hydraulic and high velocity return line applications by maintaining a column of fluid outside the filter element and above the fluid line to ensure your fluids are returned clean and without aeration.

# TFR3 Installation Drawings

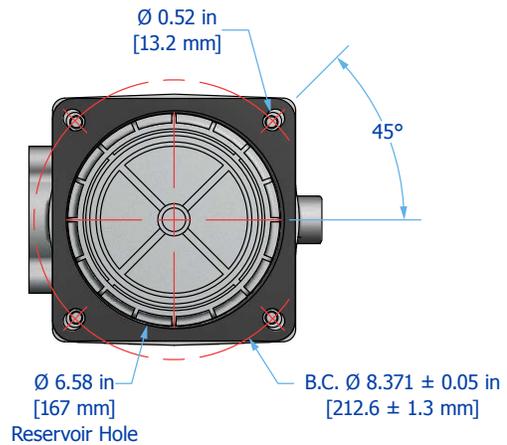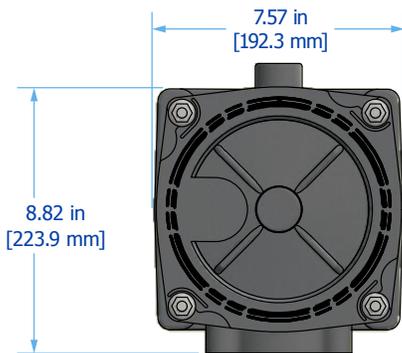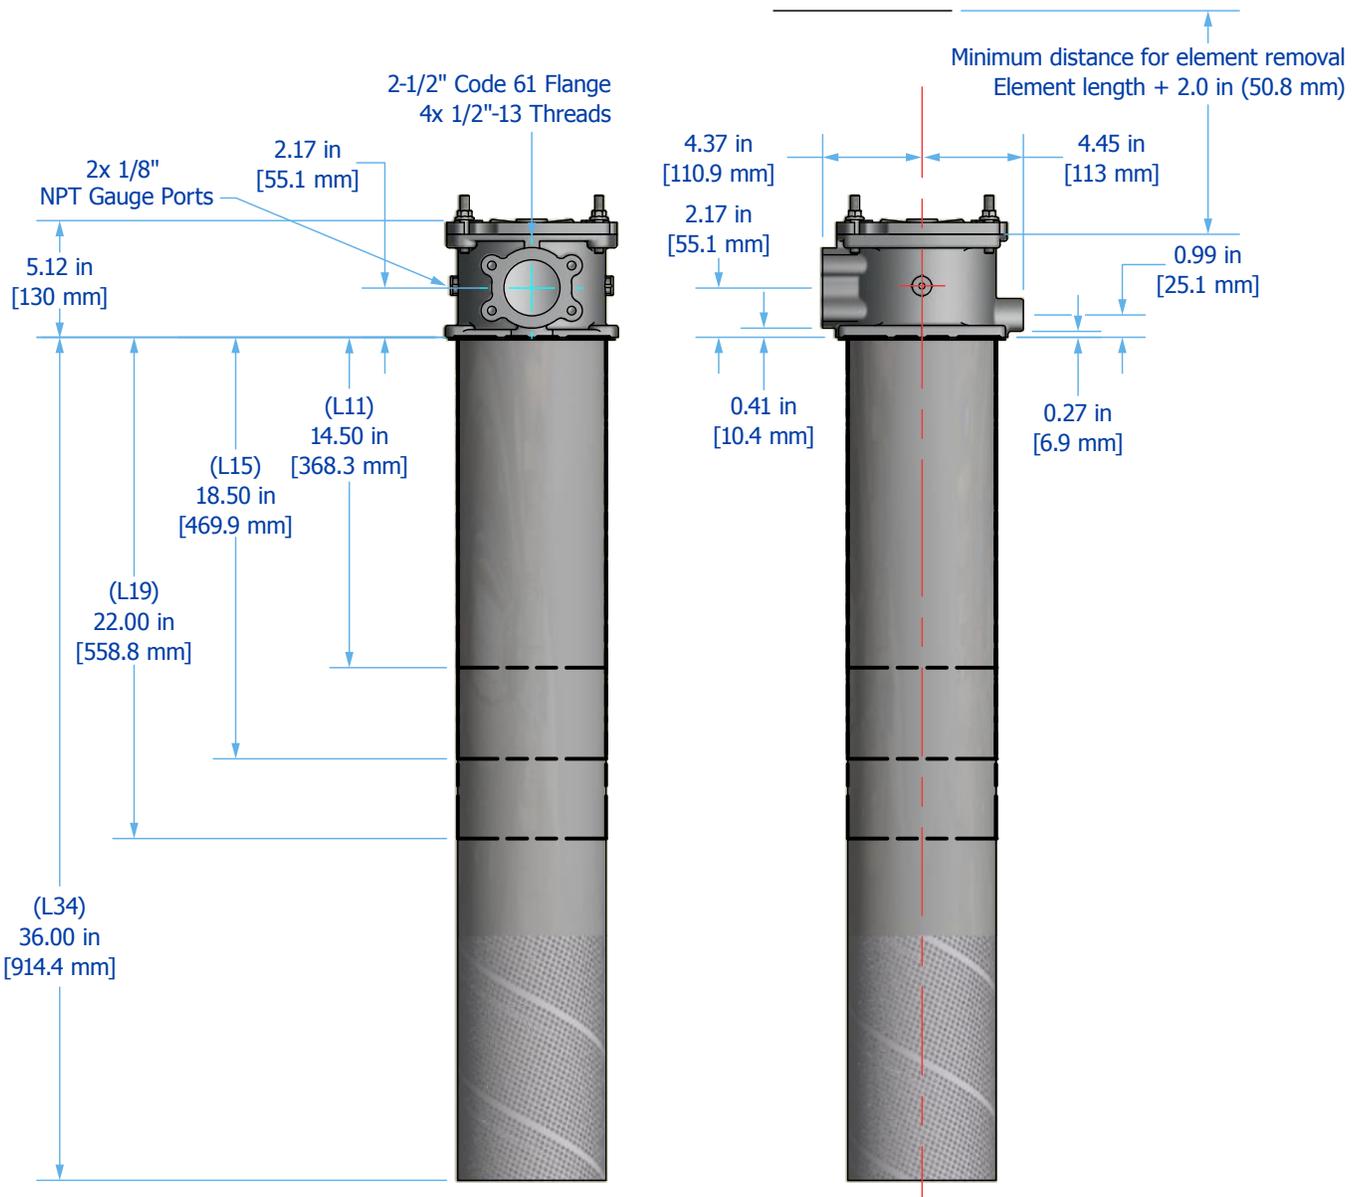


# TFR3 Installation Drawings

## TFR Weld Flange Installation Drawing

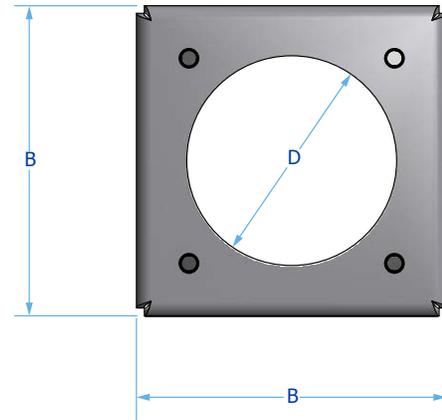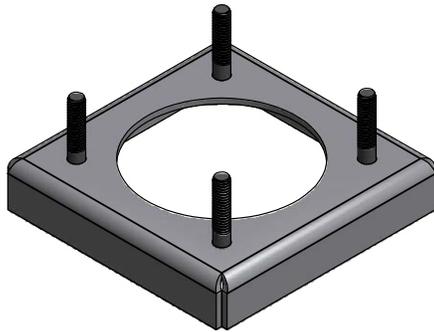

## TFR3 Installation Drawing

Series	TFR3
A	3/8" - 16 UNC-2A
B	8.31" (21.1 mm)
C	1.00" (25.4 mm)
D	6.67" (169.4 mm)
E	6.75-7.25" (171.5-184.2 mm)

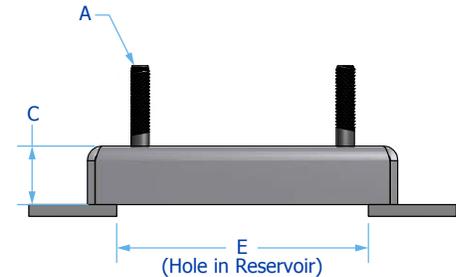


# TFR3 Specifications

Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)		
Operating Pressure	150 psi (10 bar) maximum			
Pressure Switch Trigger	22 psi (1.5 bar) 45 psi (3.1 bar)			
Visual Gauge	0-22 psi (0-1.5 bar), green to red 0-45 psi (0-3.1 bar), green to red			
Element Collapse Rating	100 psid (6.9 bard)			
Integral Bypass Setting	25 psid (1.7 bard) standard. For 50 psid (3.4 bard) option, select Bypass Option "3" in Assembly Part Number Builder and add "-50" to the end of Replacement Element part number.			
Materials of Construction	<b>Head</b> Cast aluminum	<b>Diffuser</b> Powder coated or plated steel	<b>Element Bypass Valve</b> Plated steel	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )	
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:			
	<b>Series Code</b>	<b>Bypass Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>
	3	2	HPTFR3L[Element Length Code] – [Media Selection Code][Seal Code]	HPTFR3L19–3ME-WS
		3	HPTFR3L[Element Length Code] – [Media Selection Code][Seal Code] – 50	HPTFR3L19–3ME-WS–50
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.			
Filter Sizing <sup>1</sup>	Filter assembly clean element $\Delta P$ after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.			

$\Delta P$ Factors <sup>1</sup>	Model	Length	Units	Media						
				1M	3M	6M	10M	16M	25M	**W
TFR3	L11		psid/gpm	0.1102	0.0930	0.0721	0.0646	0.0632	0.0609	0.0112
			bard/lpm	0.0020	0.0017	0.0013	0.0012	0.0012	0.0011	0.0002
	L15		psid/gpm	0.0834	0.0704	0.0545	0.0489	0.0479	0.0461	0.0084
			bard/lpm	0.0015	0.0013	0.0010	0.0009	0.0009	0.0008	0.0002
	L19		psid/gpm	0.0688	0.0580	0.0450	0.0403	0.0395	0.0380	0.0070
			bard/lpm	0.0013	0.0011	0.0008	0.0007	0.0007	0.0007	0.0001
	L34		psid/gpm	0.0398	0.0336	0.0260	0.0234	0.0228	0.0220	0.0040
			bard/lpm	0.0007	0.0006	0.0005	0.0004	0.0004	0.0004	0.0001

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# TFR3 Part Number Builder



Connection	TFR3	Max Flow Rate
	<b>F40</b> 2.5" Code 61 flange	225 gpm (852 lpm) <sup>1</sup>

Element Length <sup>2</sup>	TFR3
	<b>11</b> 11" (28 cm) nominal
	<b>15</b> 15" (38 cm) nominal
	<b>19</b> 19" (48 cm) nominal
	<b>34</b> 34" (86 cm) nominal

Bypass	<b>2</b> Integrated bypass - 25 psid (1.7 bar)
	<b>3</b> Integrated bypass - 50 psid (3.4 bar)

Pressure Indicator	<b>DX</b> Electric pressure switch (DIN connection)
	<b>E</b> Electric switch with flying leads (3-wire connection)
	<b>G</b> Visual pressure gauge
	<b>X</b> No indicator (port plugged)

Special Options	<b>R</b> <sup>3</sup> Exclude diffuser tube
	<b>W</b> Reservoir weld flange

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(C)} \geq 4000$	<b>3A</b> $\beta_{5(C)} \geq 4000$	<b>25W</b> 25 $\mu$ nominal
<b>3M</b>	$\beta_{5(C)} \geq 4000$	<b>6A</b> $\beta_{7(C)} \geq 4000$	<b>40W</b> 40 $\mu$ nominal
<b>6M</b>	$\beta_{7(C)} \geq 4000$	<b>10A</b> $\beta_{12(C)} \geq 4000$	<b>74W</b> 74 $\mu$ nominal
<b>10M</b>	$\beta_{12(C)} \geq 4000$	<b>25A</b> $\beta_{22(C)} \geq 4000$	<b>149W</b> 149 $\mu$ nominal
<b>16M</b>	$\beta_{17(C)} \geq 4000$		
<b>25M</b>	$\beta_{22(C)} \geq 4000$		

Seals	<b>B</b> Nitrile (Buna)
	<b>V</b> Fluorocarbon
	<b>E-WS</b> EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.  
<sup>2</sup>Improper length selection could result in reservoir foaming. Consider diffuser and element length and anticipated reservoir fluid level when sizing. To protect against foaming, using longer lengths is recommended.  
<sup>3</sup>Excluding diffuser tube can result in reservoir foaming in high flow density applications.  
 For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# TFR200

## In-Tank Return Line Filter Assemblies

Donaldson Hy-Pro TFR200 in-tank filter assemblies are ideal for particulate removal in medium to high flow rates for mobile equipment and hydraulic power unit applications. Use in applications where there is more than one return line to minimize plumbing space and cost. Utilizes patent protected elements to ensure element performance and spare parts revenue.

**Max Operating Flow: 200 gpm (757 lpm)**

**Max Operating Pressure: 150 psi (10 bar)**


**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Go beyond industry standard.

Advanced DFE rated filter elements deliver lower operating ISO Codes with high efficiency particulate removal and retention efficiency. With integral element bypasses and a range of media options down to  $\beta_{3(c)} > 4000$  + water absorption, you get the perfect element for your application, every time.

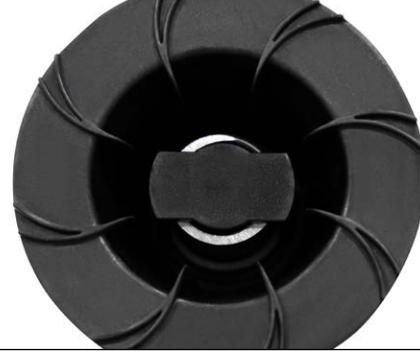

## Minimize the mess.

The top loading TFR200 housing provides easy and clean access during element service – no slippery spin-ons to handle. A threaded cover allows for quick element changes with no special tools required. The integrated handle on the top of the filter element allows a sturdy lift point during servicing.

## Inside to out flow.

The TFR200 housings utilizes an inside-to-outside element flow, meaning all the dirt captured by the element stays in the element during service. The raised bypass valve design prevents dirt from being released back into the system during filter changes like traditional in-tank filters do. Since the bypass is incorporated into the element.




## Dirt removal's never been so easy.

Packed with features including; easy service threaded aluminum cover, slotted mounting holes to meet common industry mounting patterns, auxiliary return ports, and case drain ports. With the patented element design no hold down springs are required. The bypass valve in the filter makes servicing easier and delivers consistent performance of the bypass valve over the life of your equipment.

## Eliminate aeration.

Smaller reservoirs, high return flow and high velocity through outside-to-in flow elements add up to tank turbulence and reservoir aeration with poor air release. TFR200 prevents aeration by diffusing return flow and creating laminar conditions inside the hydraulic tank.

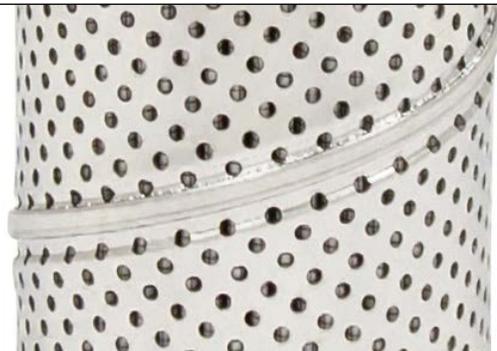

## Multiple inlet ports.

Two high flow return ports as standard to allow multiple returns to be plumbed to the filter, eliminating the need for a header block. Optional two 1" auxiliary returns ports. Optional two 1/2" case drain ports. Contact factory for non-catalog porting options.

# TFR200 Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.





## $\Delta P$ Factors<sup>1</sup>

Series	Length	Units	Media						
			3L	6L	10L	16L	25M	**W	
TFR200	L8	psid/gpm	0.10749	0.07472	0.05220	0.03695	0.02193	0.02193	
		bar/lpm	0.00196	0.00136	0.00095	0.00067	0.00040	0.00040	
	L11	psid/gpm	0.08423	0.05933	0.04247	0.03106	0.01981	0.01981	
		bar/lpm	0.00153	0.00108	0.00077	0.00057	0.00036	0.00036	
	L18	psid/gpm	0.05171	0.03958	0.02998	0.02349	0.01709	0.01709	
		bar/lpm	0.00098	0.00072	0.00055	0.00043	0.00031	0.00031	
	L27	psid/gpm	0.03910	0.03192	0.02514	0.02056	0.01604	0.01604	
		bar/lpm	0.00076	0.00058	0.00046	0.00037	0.00029	0.00029	

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on for viscosity change.

# TFR200 Installation Drawings


Dimension Table				
Length	L8	L11	L18	L27
<b>A</b>	8.18 in 207.8 mm	10.93 in 277.6 mm	19.22 in 488.2 mm	27.20 in 690.9 mm
<b>B</b>	15.37 in 390.4 mm	18.12 in 460.2 mm	26.41 in 670.8 mm	34.36 in 872.7 mm

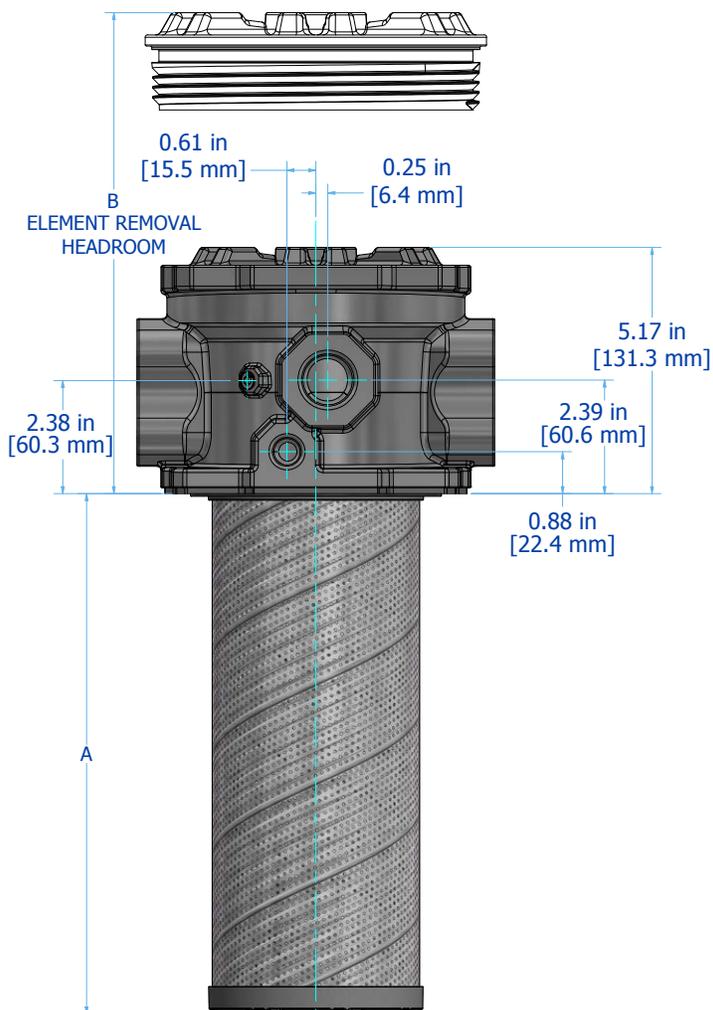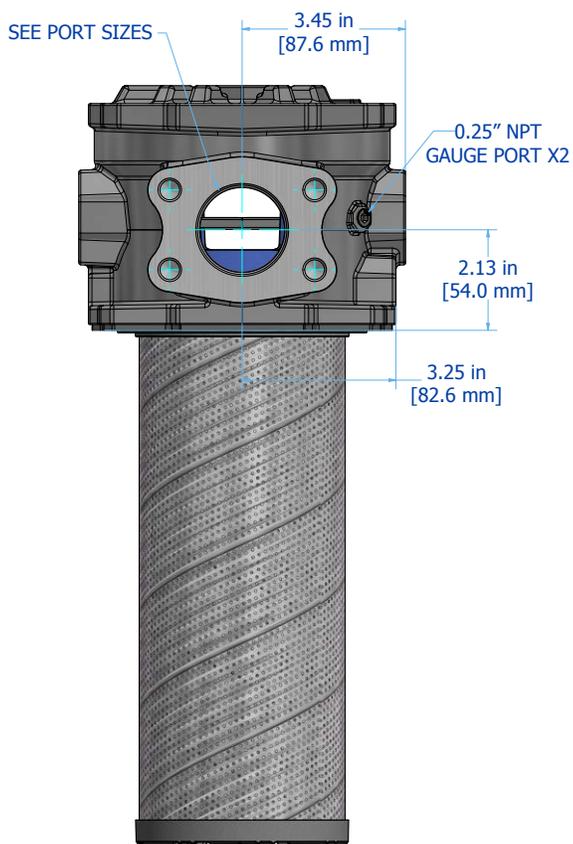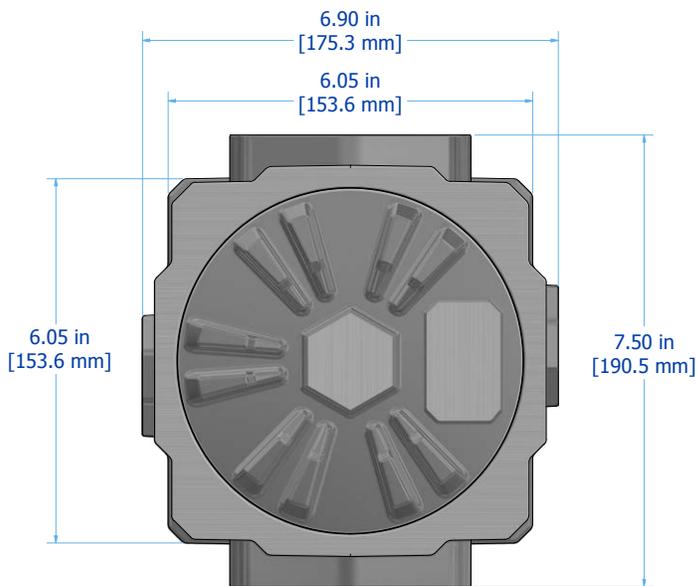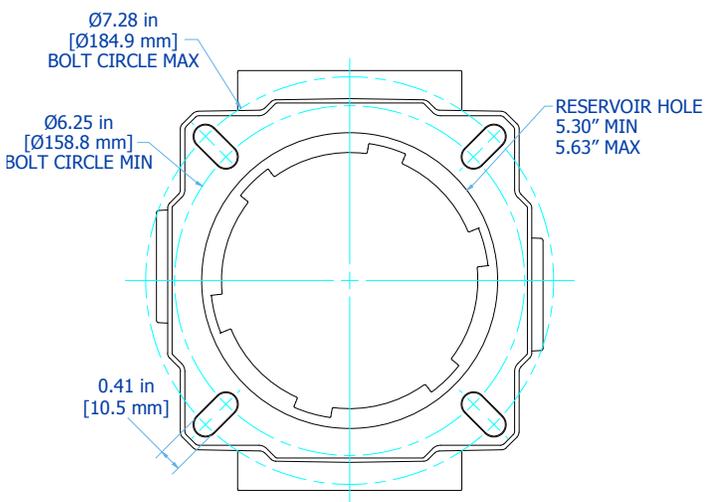

# TFR200 Specifications

Operating Temperature	-20°F to 250°F (-29°C to 121°C)		
Operating Pressure	150 psi (10.3 bar) maximum		
Pressure Switch Trigger	22 psi (1.5 bar) 45 psi (3.1 bar)		
Visual Gauge	0-45 psi (0-3.1 bar), green to red		
Element Burst Rating	100 psid (6.9 bard)		
Integral Bypass Setting	25 psid (1.7 bard) standard. 50 psid (3.4 bard) option, select Bypass Option "3" in Assembly Part Number Builder and add "-50" to the end of Replacement Element part number.		
Materials of Construction	<b>Head</b> Cast aluminum	<b>Cover</b> Cast aluminum	<b>Element End Caps</b> Cast aluminum
Media Description	<b>L</b> Our latest generation of DFE rated, low pressure drop, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.		
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:		
	<b>Bypass Code</b>	<b>Filter Element Part Number</b>	
	2	HPTFR200L[Element Length Code] – [Media Selection Code][Seal Code]	HPTFR200L27-3MB
	3	HPTFR200L[Element Length Code] – [Media Selection Code][Seal Code] – 50	HPTFR200L27-3MB-50

# TFR200 Part Number Builder

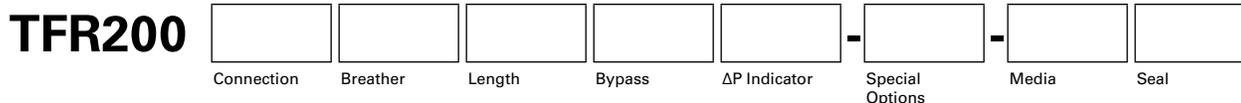

<b>Series</b>	<b>Series</b>	<b>Max Flow Rate</b>
<b>200</b>	2" maximum inlet	200 gpm (757 lpm)

<b>Connection</b>	<b>G16<sup>1</sup></b> 1" G thread (BSPP) <b>G20</b> 1-1/4" G thread (BSPP) <b>S16<sup>2</sup></b> 1" SAE thread <b>S20</b> 1-1/4" SAE thread
-------------------	--

<b>Breather</b>	<b>T</b> T.R.A.P. Breather <b>X</b> Blocked
-----------------	--

<b>Element Length</b>	<b>8</b> 8" (20 cm) nominal <b>10</b> 10" (25 cm) nominal <b>13</b> 13" (33 cm) nominal <b>19</b> 19" (48 cm) nominal
-----------------------	--

<b>Bypass</b>	<b>2</b> Integrated bypass - 25 psid (1.7 bar) <b>3</b> Integrated bypass - 50 psid (3.4 bar)
---------------	--

<b>Pressure Indicator</b>	<b>V</b> Visual pop-up <b>G</b> Visual pressure gauge <b>DX</b> Electrical (DIN 43650) <b>E</b> Electrical (3 wire flying leads) <b>H</b> Electrical (DIN 46248) <b>X</b> No indicator (port plugged)
---------------------------	--

<b>Special Options</b>	<b>A</b> Front auxiliary ports 2x 1/2", plugged <b>2W</b> 2 bolt weld flange (for use with auxiliary port heads) <b>4W</b> 4 bolt weld flange (recommended for heads without auxiliary ports)
------------------------	---

<b>Media Selection</b>	<b>G8 Dualglass</b> <b>1L</b> $\beta_{3(c)} \geq 4000$ <b>3L</b> $\beta_{4(c)} \geq 4000$ <b>6L</b> $\beta_{6(c)} \geq 4000$ <b>10L</b> $\beta_{11(c)} \geq 4000$ <b>16L</b> $\beta_{16(c)} \geq 4000$ <b>25L</b> $\beta_{22(c)} \geq 4000$	<b>G8 Dualglass + water removal</b> <b>3A</b> $\beta_{4(c)} \geq 4000$ <b>6A</b> $\beta_{6(c)} \geq 4000$ <b>10A</b> $\beta_{11(c)} \geq 4000$ <b>16A</b> $\beta_{16(c)} \geq 4000$ <b>25A</b> $\beta_{22(c)} \geq 4000$	<b>Stainless wire mesh</b> <b>25W</b> 25μ nominal <b>40W</b> 40μ nominal <b>74W</b> 74μ nominal <b>149W</b> 149μ nominal
------------------------	---	---	--

<b>Seals</b>	<b>B</b> Nitrile (Buna) <b>V</b> Fluorocarbon <b>E-WS</b> EPR seals + stainless steel support mesh
--------------	--

<sup>1</sup>If G primary connection selected, aux ports G1/2.

<sup>2</sup>If S primary connection is selected, aux ports SAE-8.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# TFRB

## In-Tank Return Line Filter Assemblies

Donaldson Hy-Pro TFRB in-tank filter assemblies are ideal for mobile and industrial power unit hydraulic applications where the breather integrated into the filter head can save space to yield a compact solution.

**Max Operating Flow: 70 gpm (265 lpm)**

**Max Operating Pressure: 150 psi (10 bar)**

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Go beyond industry standard.

Advanced DFE rated filter elements deliver lower operating ISO Codes with high efficiency particulate removal and retention efficiency. With integral element bypasses and a range of media options down to  $\beta_{3,ci} > 4000$  + water absorption, you get the perfect element for your application, every time.




## Minimize the mess.

The top loading TFRB housing provides easy and clean access during element service – no slippery spin-ons to handle. A threaded cover allows for quick element changes with no special tools required.

## Inside to out flow.

The TFRB housings utilizes an inside-to-outside element flow, meaning all the dirt captured by the element stays in the element during service. They don't release dirt back into the system with traditional outside-to-in element designs that re-contaminate hydraulic tanks during filter changes.

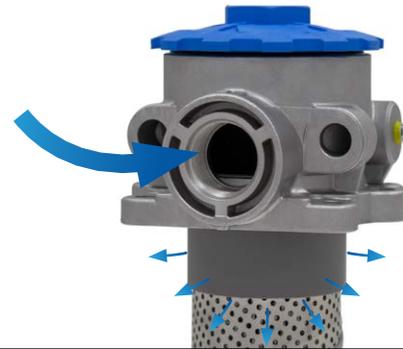


## Dirt removal's never been so easy.

Packed with features including; easy service composite threaded cover, integral BT TRAP breather, industry standard 2-bolt and 4-bolt mounting patterns, additional auxiliary: inlet ports optional, integral element hold-down / removal handle (no-spring), integral bypass (new bypass with every element change).

## Eliminate aeration.

Smaller reservoirs, high return flow and high velocity through outside-to-in flow elements add up to tank turbulence and reservoir aeration with poor air release. TFRB prevents aeration by diffusing return flow and creating laminar conditions inside the hydraulic tank.

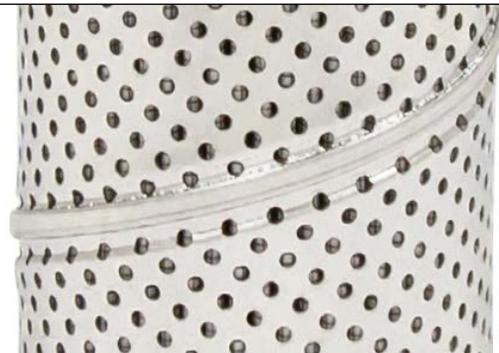

## Breather incorporated.

With typical in-tank filters, a separate connection is required on the tank to add a breather. With the TFRB, the breather is incorporated right into the filter housing making it simpler and easier to add a breather to the system. Utilizing exclusive T.R.A.P. technology, the breathers remove both airborne moisture as well as 97% of particulate 3 micron and larger. Servicing the breather is tool-free and can be done in just seconds.

# TFRB Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See filter assembly sizing guidelines & examples. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

## $\Delta P$ Factors<sup>1</sup>





Series	Length	Units	Media						
			1M	3M	6M	10M	16M	25M	**W
TFRB	L8	psid/gpm	0.6049	0.5104	0.3956	0.3548	0.3471	0.3343	0.0612
		bard/lpm	0.0110	0.0093	0.0072	0.0065	0.0063	0.0061	0.0011
	L10	psid/gpm	0.4840	0.4085	0.3166	0.2839	0.2778	0.2676	0.0490
		bard/lpm	0.0088	0.0074	0.0058	0.0052	0.0051	0.0049	0.0009
	L13	psid/gpm	0.3629	0.3063	0.2374	0.2129	0.2082	0.2006	0.0367
		bard/lpm	0.0066	0.0056	0.0043	0.0039	0.0038	0.0037	0.0007
	L19	psid/gpm	0.2418	0.2041	0.1582	0.1418	0.1388	0.1337	0.0245
		bard/lpm	0.0044	0.0037	0.0029	0.0026	0.0025	0.0024	0.0004

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on page 22 for viscosity change.

# TFRB Installation Drawings

Dimension Table

Length	L8	L10	L13	L19
<b>A</b>	7.75 in 152.4 mm	9.67 in 245.6 mm	12.88 in 327.1 mm	19.3 in 490.2 mm
<b>B</b>	11.5 in 292.1 mm	13.42 in 340.9	16.63 in 422.4 mm	23.05 in 585.5 mm

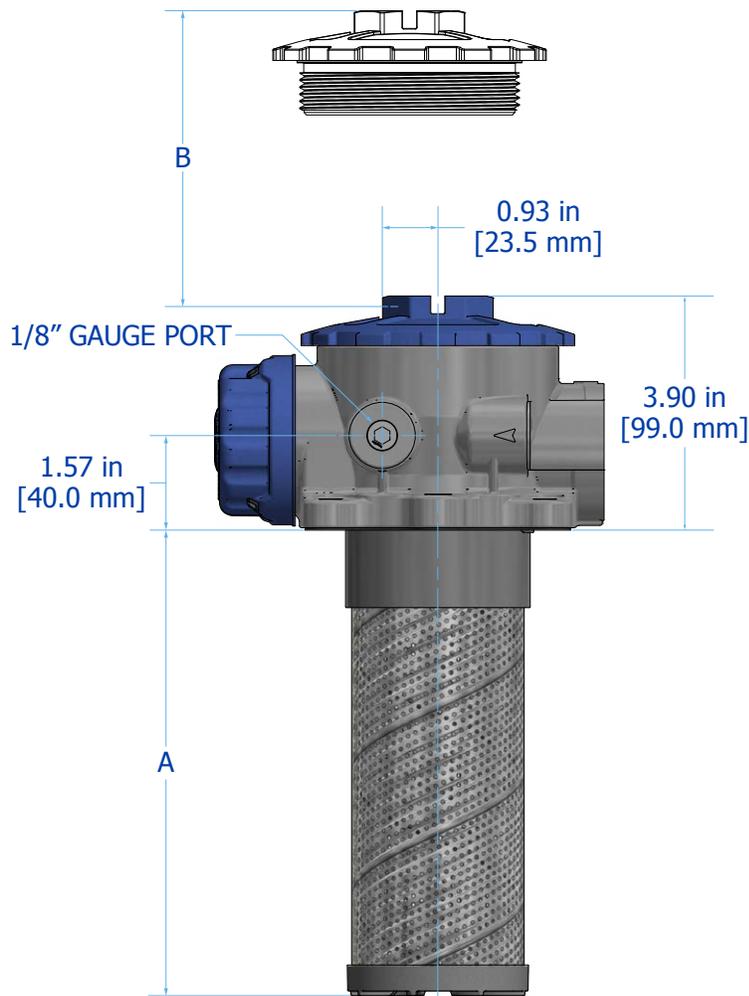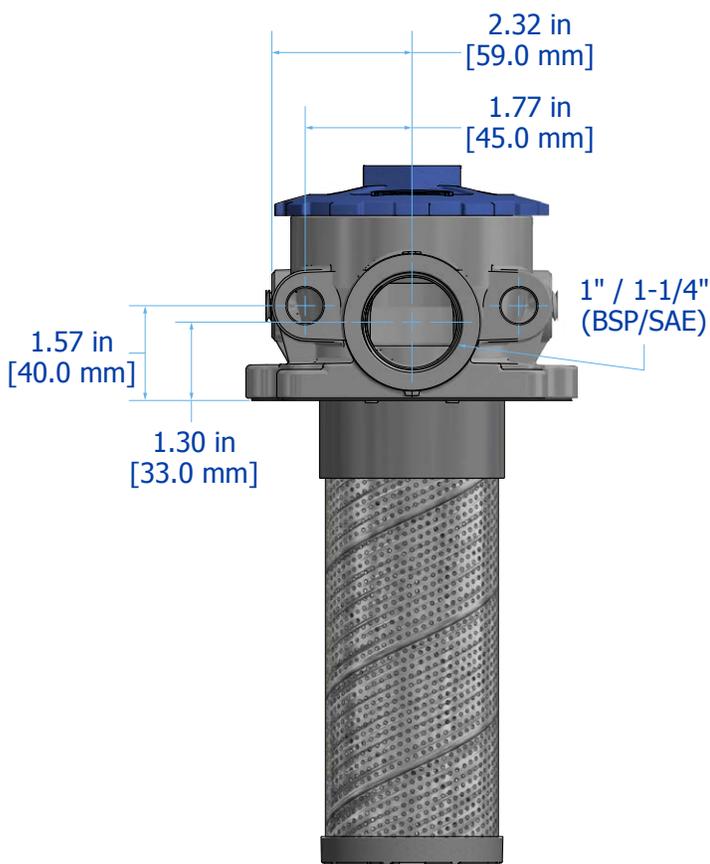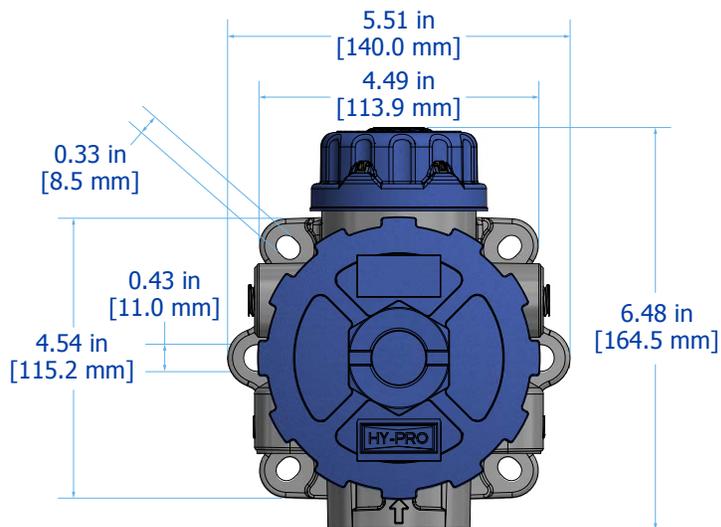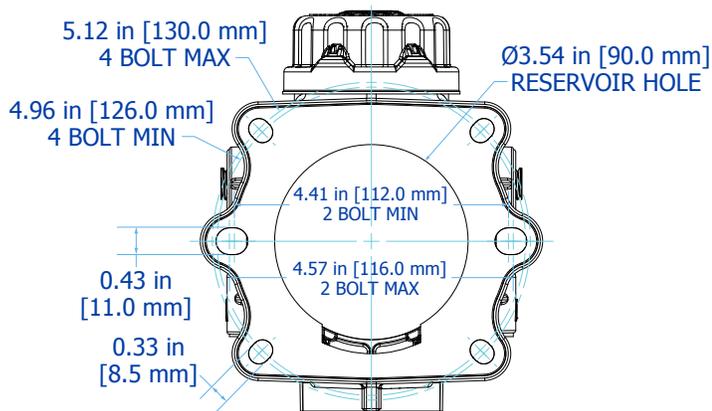

# TFRB Specifications

**Operating Temperature** -20°F to 250°F  
(-29°C to 121°C)

**Operating Pressure** 150 psi (10.3 bar) maximum

**Pressure Switch Trigger** 22 psi (1.5 bar)  
45 psi (3.1 bar)

**Visual Gauge** 0-22 psi (0-1.5 bar), green to red  
0-45 psi (0-3.1 bar), green to red

**Element Burst Rating** 100 psid (6.9 bard)

**Integral Bypass Setting** 25 psid (1.7 bard) Standard  
50 psid (3.4 bard) Bypass Option "3" in Assembly

## Materials of Construction

**Head**  
Cast aluminum

**Cover and breather**  
Nylon glass-filled

**Element Bypass Valve**  
Plated steel

## Media Description

**M**  
G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids.  $\beta_{x_{(C)}} \geq 4000$

**A**  
G8 Dualglass high performance media combined with water removal scrim.  $\beta_{x_{(C)}} \geq 4000$

**W**  
Stainless steel wire mesh media  $\beta_{x_{(C)}} \geq 2$

## Fluid Compatibility

Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.

## Replacement Elements

To determine replacement elements, use corresponding codes from your assembly part number:

**Bypass Code**  
2  
3

### Filter Element Part Number

HP329L [ Element Length Code ] – [ Media Selection Code ][ Seal Code ]


HP329L [Element Length Code] - [Media Selection Code][Seal Code] - 50

HP329L19-3MB

HP329L19-3M-50

# TFRB Part Number Builder

175



<b>Connection</b>	<b>G16</b> <sup>1</sup>	1" G thread (BSPP)
	<b>G20</b>	1-1/4" G thread (BSPP)
	<b>S16</b> <sup>2</sup>	1" SAE thread
	<b>S20</b>	1-1/4" SAE thread

<b>Breather</b>	<b>T</b>	T.R.A.P. Breather
	<b>X</b>	Blocked

<b>Element Length</b>	<b>8</b>	8" (20 cm) nominal
	<b>10</b>	10" (25 cm) nominal
	<b>13</b>	13" (33 cm) nominal
	<b>19</b>	19" (48 cm) nominal

<b>Bypass</b>	<b>2</b>	Integrated bypass - 25 psid (1.7 bar)
	<b>3</b>	Integrated bypass - 50 psid (3.4 bar)

<b>Pressure Indicator</b>	<b>V</b> <sup>3</sup>	Visual pop-up (25 psid bypass only)
	<b>G</b>	Visual pressure gauge
	<b>DX</b>	Electrical (DIN 43650)
	<b>E</b>	Electrical (3 wire flying leads)
	<b>H</b>	Electrical (DIN 46248) (25 psid bypass only)
	<b>X</b>	No indicator (port plugged)

<b>Special Options</b>	<b>A</b>	Front auxiliary ports 2x 1/2", plugged
	<b>2W</b>	2 bolt weld flange (for use with auxiliary port heads)
	<b>4W</b>	4 bolt weld flange (recommended for heads without auxiliary ports)

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>Stainless wire mesh</b>	
	<b>1M</b>	β <sub>3</sub> (Cl) ≥ 4000	<b>3A</b>	β <sub>4</sub> (Cl) ≥ 4000	<b>25W</b>	25μ nominal
<b>3M</b>	β <sub>4</sub> (Cl) ≥ 4000	<b>6A</b>	β <sub>6</sub> (Cl) ≥ 4000	<b>40W</b>	40μ nominal	
<b>6M</b>	β <sub>6</sub> (Cl) ≥ 4000	<b>10A</b>	β <sub>11</sub> (Cl) ≥ 4000	<b>74W</b>	74μ nominal	
<b>10M</b>	β <sub>11</sub> (Cl) ≥ 4000	<b>16A</b>	β <sub>16</sub> (Cl) ≥ 4000	<b>149W</b>	149μ nominal	
<b>16M</b>	β <sub>16</sub> (Cl) ≥ 4000	<b>25A</b>	β <sub>22</sub> (Cl) ≥ 4000			
<b>25M</b>	β <sub>22</sub> (Cl) ≥ 4000					

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>If G primary connection selected, aux ports G1/2.

<sup>2</sup>If S primary connection is selected, aux ports SAE-8.

<sup>3</sup>Only available with 25 PSI bypass option.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# TFRC

## In-Tank Return Line Filter Assemblies

Donaldson Hy-Pro TFRC in-tank filter assemblies are ideal for particulate contamination removal in small hydraulic power units and mobile equipment where a tank breather is not integrated into the filter head.

**Max Operating Flow: 40 gpm (151 lpm)**

**Max Operating Pressure: 150 psi (10 bar)**



[hyprofiltration.com/](https://hyprofiltration.com/)



## Go beyond industry standard.

Advanced DFE rated filter elements deliver lower operating ISO Codes with high efficiency particulate removal and retention efficiency. With integral element bypasses and a range of media options down to  $\beta_{3(c)} > 4000$  + water absorption, you get the perfect element for your application, every time.



## Minimize the mess.

The top loading TFRC housing provides easy and clean access during element service – no slippery spin-ons to handle. A bolt on aluminum cover allows for quick element changes with common hand tools. The unique element design eliminates the need for a hold down spring or bypass to be installed during servicing, just drop in the element and bolt on the cover.

## Inside to out flow.

The TFRC housings utilizes an inside-to-outside element flow, meaning all the dirt captured by the element stays in the element during service. They don't release dirt back into the system with traditional outside-to-in element designs that re-contaminate hydraulic tanks during filter changes.




## Dirt removal's never been so easy.

Packed with features including; easy service aluminum cover, industry standard 2-bolt and 4-bolt mounting patterns, integral element holddown / removal handle (no-spring), and integral bypass (new bypass with every element change).

## Eliminate aeration.

Smaller reservoirs, high return flow and high velocity through outside-to-in flow elements add up to tank turbulence and reservoir aeration with poor air release. TFRC prevents aeration by diffusing return flow and creating laminar conditions inside the hydraulic tank.

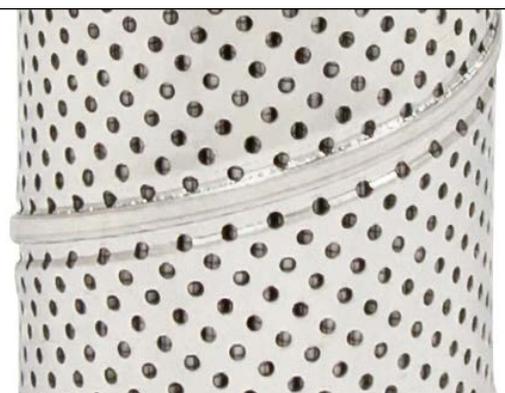

# TFRC Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See below for viscosity correction formula. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.






## $\Delta P$ Factors<sup>1</sup>

Series	Length	Units	Media						
			1M	3M	6M	10M	16M	25M	**W
TFRC	L8	psid/gpm	0.6049	0.5104	0.3956	0.3548	0.3471	0.3343	0.0612
		bard/lpm	0.0110	0.0093	0.0072	0.0065	0.0063	0.0061	0.0011
	L10	psid/gpm	0.4840	0.4085	0.3166	0.2839	0.2778	0.2676	0.0490
		bard/lpm	0.0088	0.0074	0.0058	0.0052	0.0051	0.0049	0.0009
	L13	psid/gpm	0.3629	0.3063	0.2374	0.2129	0.2082	0.2006	0.0367
		bard/lpm	0.0066	0.0056	0.0043	0.0039	0.0038	0.0037	0.0007
	L19	psid/gpm	0.2418	0.2041	0.1582	0.1418	0.1388	0.1337	0.0245
		bard/lpm	0.0044	0.0037	0.0029	0.0026	0.0025	0.0024	0.0004

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# TFRC Installation Drawings


Dimension Table				
Length	L8	L10	L13	L19
<b>A</b>	8.10 in 205.8 mm	10.02 in 254.6 mm	13.23 in 336.1 mm	19.65 in 499.2 mm
<b>B</b>	10.35 in 262.9 mm	12.50 in 317.5 mm	15.75 in 400.0 mm	24.40 in 619.8 mm

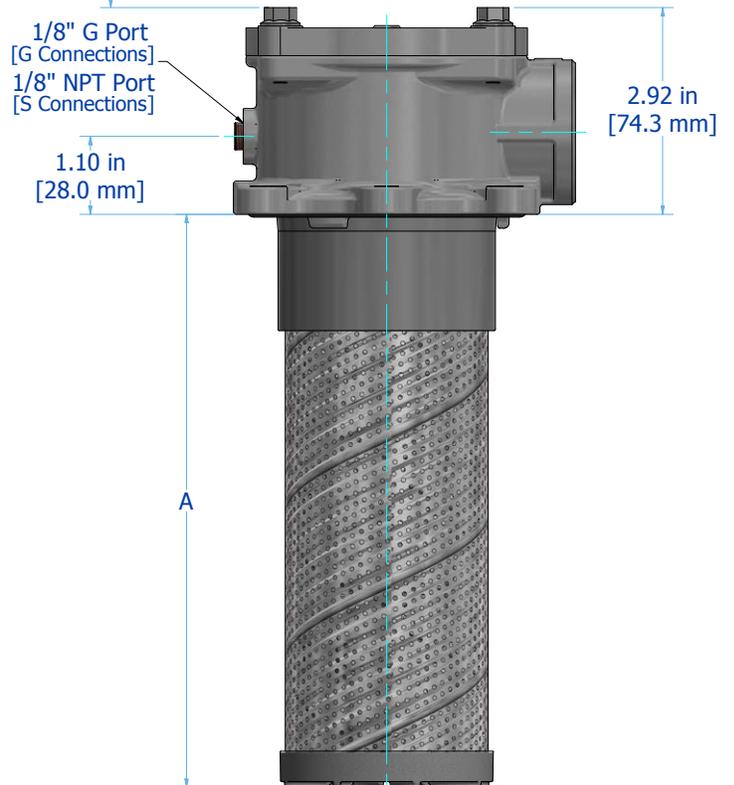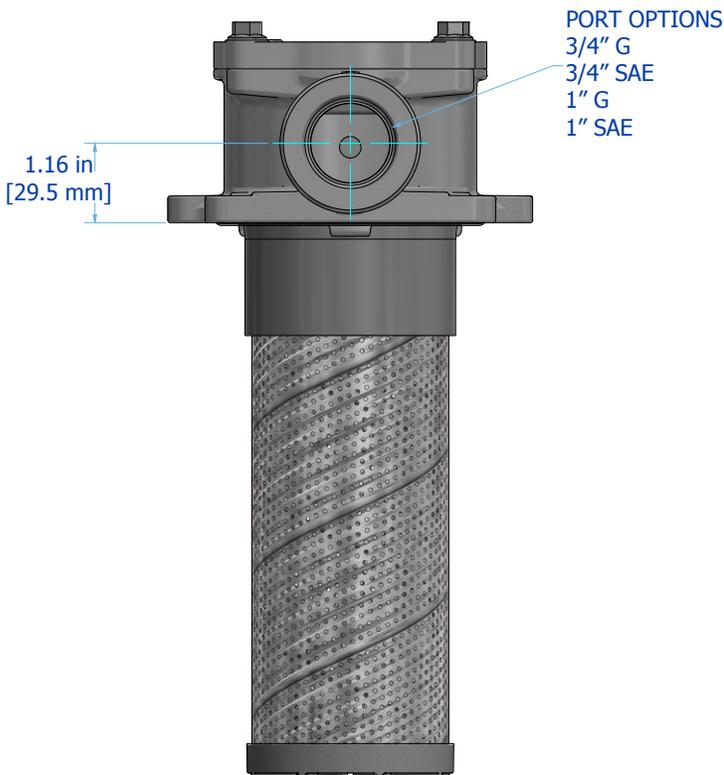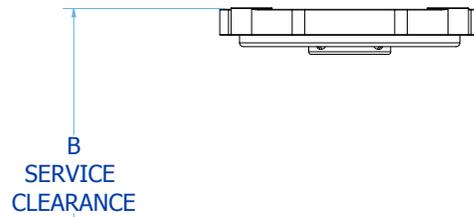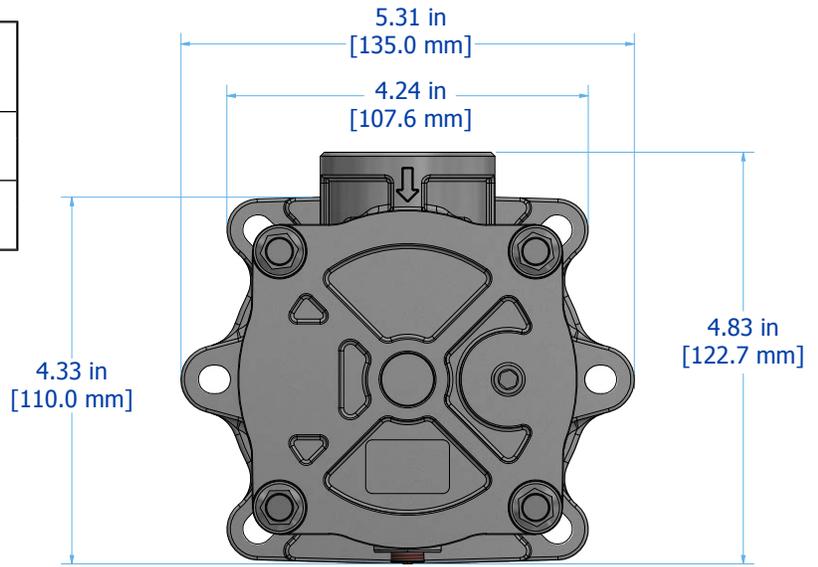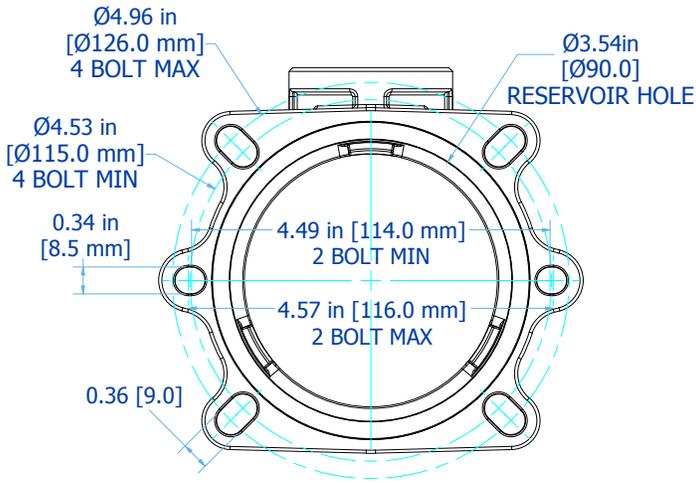

# TFRC Specifications

Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 140°F (-20°C to 60°C)	
Operating Pressure	150 psi (10.3 bar) maximum		
Pressure Switch Trigger	22 psi (1.5 bar) 45 psi (3.1 bar)		
Visual Gauge	0-22 psi (0-1.5 bar), green to red 0-45 psi (0-3.1 bar), green to red		
Element Burst Rating	100 psid (6.9 bard)		
Integral Bypass Setting	25 psid (1.7 bard) standard. For 50 psid (3.4 bard) option, select Bypass Option "3" in Assembly Part Number Builder and add "-50" to the end of Replacement Element part number.		
Materials of Construction	<b>Head</b> Cast aluminum	<b>Lid</b> Aluminum	<b>Element Bypass Valve</b> Plated steel
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(C)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(C)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(C)}} \geq 2$
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.		
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:		
	<b>Bypass Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>
	2	HP329L [Element Length Code] – [Media Selection Code][Seal Code]	HP329L19-3MB
	3	HP329L [Element Length Code] - [Media Selection Code][Seal Code] - 50	HP329L19-3MB-50

# TFRC Part Number Builder



Connection	Port Option	Max Flow Rate
<b>G16<sup>2</sup></b>	1" G Thread (BSPP)	40 gpm (151 lpm) <sup>1</sup>
<b>S16<sup>2</sup></b>	1" SAE	40 gpm (151 lpm) <sup>1</sup>

Element Length		
<b>8</b>	8" (20 cm) nominal	
<b>10</b>	10" (25 cm) nominal	
<b>13</b>	13" (33 cm) nominal	
<b>19</b>	19" (48 cm) nominal	

Bypass		
<b>2<sup>2</sup></b>	Integrated bypass - 25 psid (1.7 bar)	
<b>3<sup>3</sup></b>	Integrated bypass - 50 psid (3.4 bar)	

Pressure Indicator		
<b>V</b>	Visual pop-up (25 psid bypass only)	
<b>G</b>	Visual pressure gauge	
<b>DX</b>	Electrical (DIN 43650)	
<b>E</b>	Electrical (3 wire flying leads)	
<b>H</b>	Electrical (DIN 46248) (25 psid bypass only)	
<b>X</b>	No indicator (port plugged)	

Special Options		
<b>W</b>	Reservoir weld flange	

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25 $\mu$ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40 $\mu$ nominal
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>10A</b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74 $\mu$ nominal
<b>10M</b>	$\beta_{11(c)} \geq 4000$	<b>25A</b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149 $\mu$ nominal
<b>16M</b>	$\beta_{16(c)} \geq 4000$		
<b>25M</b>	$\beta_{22(c)} \geq 4000$		

Seals		
<b>B</b>	Nitrile (Buna)	
<b>V</b>	Fluorocarbon	
<b>E-WS</b>	EPR seals + stainless steel support mesh	

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>If G primary connection selected, indicator port 1/2" G.

<sup>3</sup>If S primary connection selected, indicator port 1/2" NPT.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# LF(M)

## High Viscosity Filter Assemblies

Low pressure filter assemblies optimized for high flow hydraulic, high viscosity lube and heavily contaminated fuel applications.

**Max Operating Pressure: 150 psi (10 bar)**

**Available options up to 450 psi (31.0 bar)**

**Donaldson.** [hyprofiltration.com/](http://hyprofiltration.com/)  
**HY-PRO™**



## Filtration starts with the filter.

The oversized coreless filter element in every LF delivers lower ISO Codes over a long element lifespan to ensure low disposal impact, simultaneously reducing your environmental footprint and your bottom line. To top it off, select elements come standard with an integral zero-leak bypass so with every filter change you get a new bypass along with peace of mind.



## Built for industrial use.


Constructed from heavy duty carbon steel (standard) or the optional 304 or 316 stainless steel, the LF filter housings are designed to excel in even the toughest industrial conditions. Multiround units go even further to provide increased capacity whether you're operating with incredibly high viscosity oils, extreme flow rates or need extended service intervals.



## Element configuration & media options.


With media options down to  $\beta_{3(\text{c})} > 4000$ , insoluble varnish removal and water absorbing options, you get the perfect element for your application, every time. Element configurations include Donaldson Hy-Pro HP106 and HP107 coreless style elements with integral, zero-leak bypass valves. For those plants using 8314 style industry standard elements, the HP8314 offers an improved bypass valve design.

Glass Media Filtration Efficiency (Beta Ratio) vs Micron Size

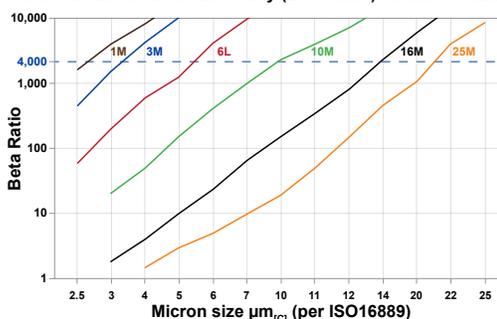


## Setting the new standard.

Sampling and condition monitoring are no longer optional, they're a necessity. That's why every LF comes standard with sample ports and green to red true  $\Delta P$  gages that indicate exact element condition at all times. With access to accurate system cleanliness conditions, you'll know exactly how well your filtration is performing.

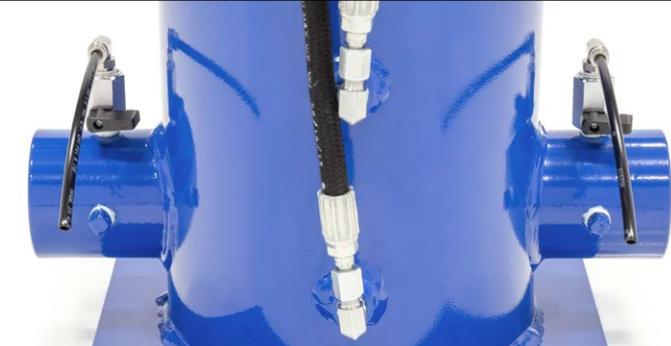

## Minimize the mess.

Top loading filter housings minimize the mess from element services and changes. And with the easy open swing bolt lid design, you'll be back to filtering your fluids without having to search for all those lost parts.

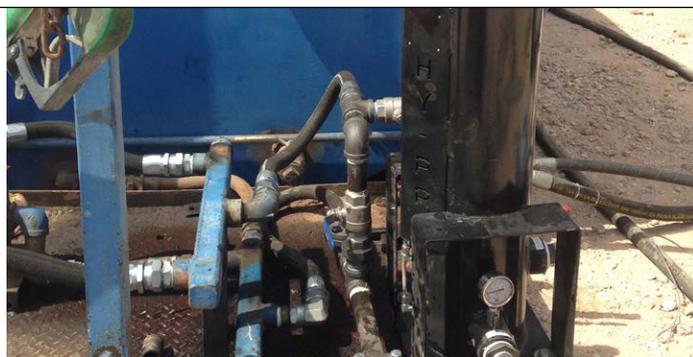


## Seamlessly integrated into your systems.


Multiple connection options and port customization provide the flexibility to integrate LF directly into existing re-circulating or auxiliary side loop and dispensing lines to improve fluid cleanliness and optimize existing assets. Get filtration exactly where you need it without extra expense of installing new plumbing and electrical.

# LF Installation Drawings


## LF (L18) Installation Drawing

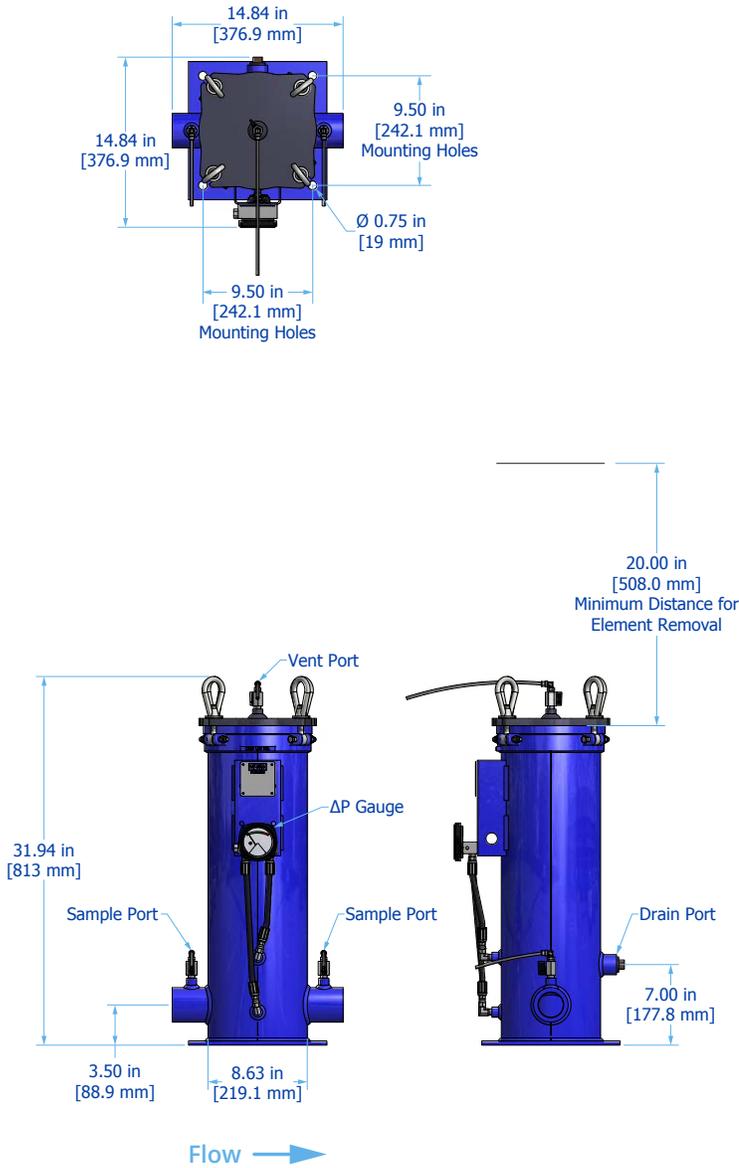

## LF (L36) Installation Drawing

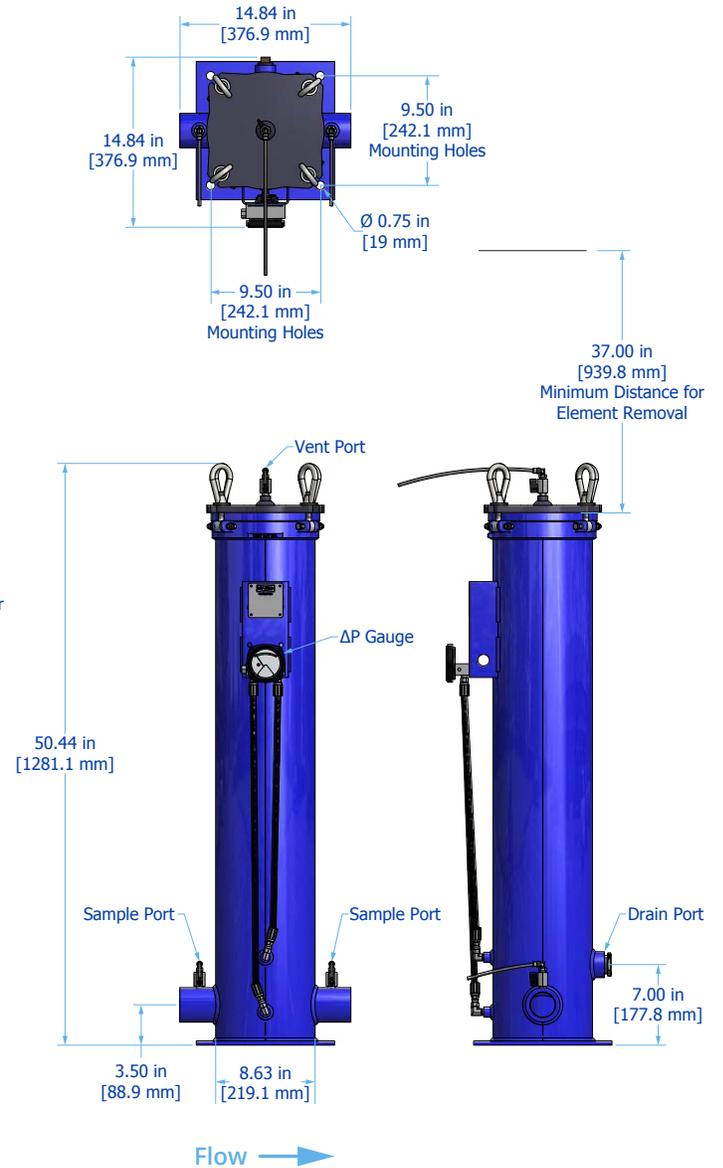

# LFM Installation Drawings

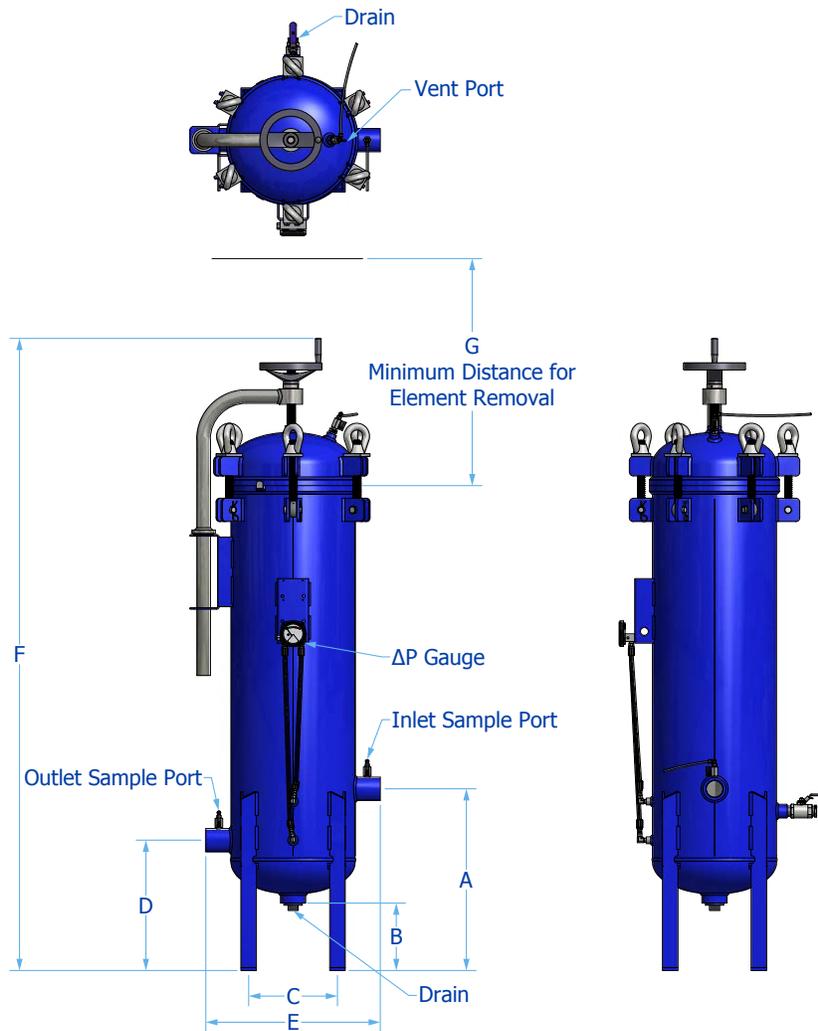

Series	Number of Elements	Port Size	Vessel Diameter	A	B	C	D	E	F	G	Weight
LFM	3	2	16.0 in 40.6 cm	19.1 in 48.6 cm	8.4 in 21.3 cm	10.4 in 26.4 cm	12.4 in 31.4 cm	29.0 in 73.7 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	337.0 lb 153.0 kg
		3	16.0 in 40.6 cm	20.1 in 51.1 cm	8.4 in 21.3 cm	10.4 in 26.4 cm	12.4 in 31.4 cm	29.0 in 73.7 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	357.0 lb 162.0 kg
	4	4	16.0 in 40.6 cm	22.6 in 57.5 cm	8.4 in 21.3 cm	10.4 in 26.4 cm	12.4 in 31.4 cm	29.0 in 73.7 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	367.0 lb 167.0 kg
		2	18.0 in 45.7 cm	19.1 in 48.6 cm	7.9 in 20.1 cm	12.0 in 30.5 cm	12.4 in 31.4 cm	31.0 in 78.7 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	422.0 lb 192.0 kg
4	3	3	18.0 in 45.7 cm	20.1 in 51.1 cm	7.9 in 20.1 cm	12.0 in 30.5 cm	12.4 in 31.4 cm	31.0 in 78.7 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	442.0 lb 201.0 kg
		4	18.0 in 45.7 cm	22.6 in 57.5 cm	7.9 in 20.1 cm	12.0 in 30.5 cm	12.4 in 31.4 cm	31.0 in 78.7 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	453.0 lb 206.0 kg
	9	3	24.0 in 61.0 cm	20.1 in 51.1 cm	7.5 in 19.1 cm	16.7 in 42.4 cm	12.4 in 31.4 cm	37.0 in 93.9 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	734.0 lb 333.0 kg
4			24.0 in 61.0 cm	22.6 in 57.5 cm	7.5 in 19.1 cm	16.7 in 42.4 cm	12.4 in 31.4 cm	37.0 in 93.9 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	744.0 lb 338.0 kg
6		24.0 in 61.0 cm	23.9 in 60.7 cm	7.5 in 19.1 cm	16.7 in 42.4 cm	12.4 in 31.4 cm	37.0 in 93.9 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	759.0 lb 345.0 kg	

\*Dimensions are approximations taken from base model and will vary according to options chosen and customer sizing requirements.

# LF(M) Specifications

<b>Dimensions</b>	See Installation Drawing for model specific dimensions.											
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)				<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)							
<b>Operating Pressure</b>	150 psi (10 bar) standard, see Special Options for additional pressure ratings.											
<b>Element Collapse Rating</b>	<b>HP105</b> 150 psi (10.3 bar)			<b>HP106</b> 150 psi (10.3 bar)			<b>HP107</b> 150 psi (10.3 bar)			<b>HP8314 (All Codes)</b> 150 psi (10.3 bar)		
<b>Integral Bypass Setting</b>	<b>HP106 – integral element bypass</b> 25 psid (1.7 bard)			<b>HP107 – Integral element bypass</b> 50 psid (3.4 bard)			<b>HP8314 (Code 82) – Integral housing bypass</b> 25 psid (1.7 bard)			<b>HP8314 (Code 83) – Integral housing bypass</b> 50 psid (3.4 bard)		
<b>Materials of Construction</b>	<b>Housing</b> Carbon steel with industrial coating Optional 304 stainless steel											
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$			<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$			<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )			<b>VTM</b> $\beta_{0.9_{Cl}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media		
<b>Replacement Elements</b>	To determine replacement elements, use corresponding codes from your assembly part number:											
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>								<b>Example</b>		
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]								HP105L36–6AB		
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]								HP106L18–10MV		
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]								HP107L36–VTM710V		
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]								HP8314L39–25WV		
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]								HP8314L16–12MB		
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]								HP8314L39–16ME–WS		
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.											
<b>Filter Sizing<sup>1</sup></b>	Filter assembly clean element $\Delta P$ after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.											
<b><math>\Delta P</math> Factors<sup>1</sup></b>	<b>Model</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>								
				<b>VTM</b>	<b>05M</b>	<b>1M</b>	<b>3M</b>	<b>6L</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	LF	16/18	psid/gpm	0.0628	0.0473	0.0463	0.0391	0.0303	0.0271	0.0266	0.0256	0.0046
			bard/lpm	0.0011	0.0009	0.0008	0.0007	0.0006	0.0005	0.0005	0.0005	0.0005
		36/39	psid/gpm	0.0440	0.0331	0.0324	0.0273	0.0212	0.0190	0.0186	0.0179	0.0032
			bard/lpm	0.0008	0.0006	0.0006	0.0005	0.0004	0.0003	0.0003	0.0003	0.0001
	LFM3	36/39	psid/gpm	0.0122	0.0092	0.0081	0.0055	0.0051	0.0045	0.0041	0.0035	0.0029
			bard/lpm	0.0002	0.0002	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001
	LFM4	36/39	psid/gpm	0.0091	0.0069	0.0067	0.0048	0.0044	0.004	0.0037	0.0032	0.0025
			bard/lpm	0.0002	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001
	<b>Model</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>								
				<b>1A</b>	<b>3A</b>	<b>6A</b>	<b>10A</b>	<b>16A</b>	<b>25A</b>			
	LF	16/18	psid/gpm	0.0514	0.0434	0.0336	0.0302	0.0295	0.0284			
			bard/lpm	0.0009	0.0008	0.0006	0.0005	0.0005	0.0005			
		36/39	psid/gpm	0.0360	0.0304	0.0235	0.0211	0.0207	0.0199			
			bard/lpm	0.0007	0.0006	0.0004	0.0004	0.0004	0.0004			
	LFM3	36/39	psid/gpm	0.0073	0.0049	0.0046	0.0040	0.0037	0.0031			
			bard/lpm	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001			
	LFM4	36/39	psid/gpm	0.0060	0.0043	0.0040	0.0036	0.0033	0.0029			
			bard/lpm	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001			

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# LF(M) Part Number Builder



Series	Number of Elements	Max Flow Rate
<b>omit</b>	1 element	200 gpm (757 lpm) <sup>1</sup>
<b>M3</b>	3 elements	600 gpm (2271 lpm) <sup>1</sup>
<b>M4</b>	4 elements	800 gpm (3028 lpm) <sup>1</sup>
<b>M9</b>	9 elements	1800 gpm (6814 lpm) <sup>1</sup>
<b>M14</b>	14 elements	2800 gpm (10,600 lpm) <sup>1</sup>

Connection	Options
<b>A2</b>	2" ANSI flange – 150# standard
<b>A3</b>	3" ANSI flange – 150# standard
<b>A4</b>	4" ANSI flange – 150# standard (M4-M14 Options Only)
<b>A6</b>	6" ANSI flange – 150# standard (M4-M14 Options Only)
<b>D2</b>	DN50 DIN flange – PN16 standard
<b>D3</b>	DN80 DIN flange – PN16 standard
<b>D4</b>	4" DIN flange (M4-M14 Options Only)
<b>D6</b>	6" DIN flange (M4-M14 Options Only)
<b>F2<sup>1</sup></b>	2" Code 61 flange
<b>F3<sup>1</sup></b>	3" Code 61 flange
<b>G2</b>	2" G thread (BSPP)
<b>N2</b>	2" NPT
<b>S2<sup>2</sup></b>	2" SAE threaded O-ring boss

Element Type	Options
<b>1</b>	HP101 – no bypass
<b>5</b>	HP105 – no bypass
<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass
<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass
<b>8X</b>	HP8314 – no bypass
<b>82</b>	HP8314 – 25 psid (1.7 bard) integral housing bypass
<b>85</b>	HP8314 – 50 psid (3.4 bard) integral housing bypass

Element Length	Options
<b>18<sup>3</sup></b>	L18 single length filter housing and coreless element
<b>36<sup>3</sup></b>	L36 single length filter housing and coreless element
<b>16<sup>3</sup></b>	L16 single length filter housing and coreless element
<b>39<sup>3</sup></b>	L39 single length filter housing and coreless element

ΔP Indicator	Options
<b>D</b>	22 psid visual gauge + electric switch
<b>E</b>	22 psid visual gauge
<b>F</b>	45 psid visual gauge + electric switch
<b>G</b>	45 psid visual gauge
<b>H</b>	65 psid visual gauge + electric switch (elements 5 or 8X only)
<b>J</b>	65 psid visual gauge (elements 5 or 8X only)
<b>P</b>	2 pressure gages (industrial liquid filled)
<b>X</b>	None (ports plugged)

Special Options	Options
<b>omit</b>	150 psi (10.3 bar) max operating pressure, carbon steel
<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
<b>G</b>	Spill retention pan with fork guides (industrial coated steel)
<b>P9<sup>4</sup></b>	Phosphate ester fluid compatibility modification
<b>S1<sup>5</sup></b>	150 psi (10.3 bar) max oper. pressure, 304 stainless steel
<b>S2<sup>5</sup></b>	250 psi (17.2 bar) max oper. pressure, 304 stainless steel
<b>S3<sup>5</sup></b>	450 psi (31.0 bar) max oper. pressure, 304 stainless steel
<b>S9<sup>6</sup></b>	Skydrol fluid compatibility modification
<b>U1</b>	U Code (ASME U code certified)
<b>W</b>	Automatic air bleed valve
<b>X</b>	250 psi (17.2 bar) max oper. pressure, carbon steel
<b>Y</b>	450 psi (31.0 bar) max oper. pressure, carbon steel

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>05M</b>	$\beta_{0.9_{(Cl)}} \geq 4000$	<b>1A</b> $\beta_{3_{(Cl)}} \geq 4000$	<b>25W</b> 25μ nominal
<b>1M</b>	$\beta_{3_{(Cl)}} \geq 4000$	<b>3A</b> $\beta_{5_{(Cl)}} \geq 4000$	<b>40W</b> 40μ nominal
<b>3M</b>	$\beta_{4_{(Cl)}} \geq 4000$	<b>6A</b> $\beta_{6_{(Cl)}} \geq 4000$	<b>74W</b> 74μ nominal
<b>6L</b>	$\beta_{6_{(Cl)}} \geq 4000$	<b>10A<sup>7</sup></b> $\beta_{11_{(Cl)}} \geq 4000$	<b>149W</b> 149μ nominal
<b>10M<sup>7</sup></b>	$\beta_{11_{(Cl)}} \geq 4000$	<b>16A</b> $\beta_{16_{(Cl)}} \geq 4000$	
<b>16M</b>	$\beta_{16_{(Cl)}} \geq 4000$	<b>25A</b> $\beta_{22_{(Cl)}} \geq 4000$	
<b>25M</b>	$\beta_{22_{(Cl)}} \geq 4000$		

**VTM**

**VTM710<sup>8</sup>**  $\beta_{0.9_{(Cl)}} \geq 4000$  particulate, insoluble oxidation by-product and water removal media

Seals	Options
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Code 61 flange and SAE connection options include all other ports with SAE connections. When selected, no NPT connections are present in the assembly.

<sup>3</sup>Compatibility will be based on Element Type selection. For elements HP105, HP106, and HP107, use Length Code 18 or 36. Length Codes 16 and 39 only compatible with HP8314 element.

<sup>4</sup>When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

<sup>5</sup>Lid closure hardware is plated carbon steel.

<sup>6</sup>When selected, must be paired with Seal option "E-WS". Contact factory for more information or assistance in fluid compatibility.

<sup>7</sup>For elements HP8314, use 12M or 12A for respective media code in place of 10M or 10A.

<sup>8</sup>Only available on HP107 series elements. Max recommended flow rate 16 gpm (60 lpm) for HP107L36-VTM710\* elements and 8 gpm (30 lpm) for HP107L18-VTM710\* elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.



# LFW

## Wall Mounted Filter Assemblies

A compact, dedicated off-line contamination solution ideal for small reservoirs, gearboxes and diesel engine crankcase conditioning. Coming in at a whopping 0 ft<sup>2</sup> of floor space, the LFW is designed to get your filtration off the ground and positioned conveniently for you, whether you're polishing off that high viscosity gearbox oil or just want to add a little more protection for your critical components from heavy contaminants. And with Donaldson Hy-Pro filter elements inside, the possibilities are endless for what you can do with the LFW.

**Max Operating Pressure: 150 psi (10 bar)**

**Available options up to 250 psi (17.2 bar)**

## Elements that go beyond industry standard.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3(C)} > 4000 +$  water absorption and integral element bypass valves, you get the perfect element for your application, every time.



## User friendly on a whole new scale.


With everything you need together in one tiny little package, LFW service and operation couldn't be easier. From the top loading housing to the sample ports, the LFW is built to match powerful filtration with your convenience. And with the easy-open swing bolt enclosure, worrying about lost parts during service becomes a thing of the past.

## On board fuel filter upgrade.

New diesel engine fuel cleanliness requirements for high pressure injectors call for higher efficiency filters, rendering your existing on-board filters too small. The LFW element is sized just right and with available water absorbing media options, you'll get clean, dry fuel and the knowledge that your diesel engines are running more efficiently than ever.



## LFW Installation Drawing

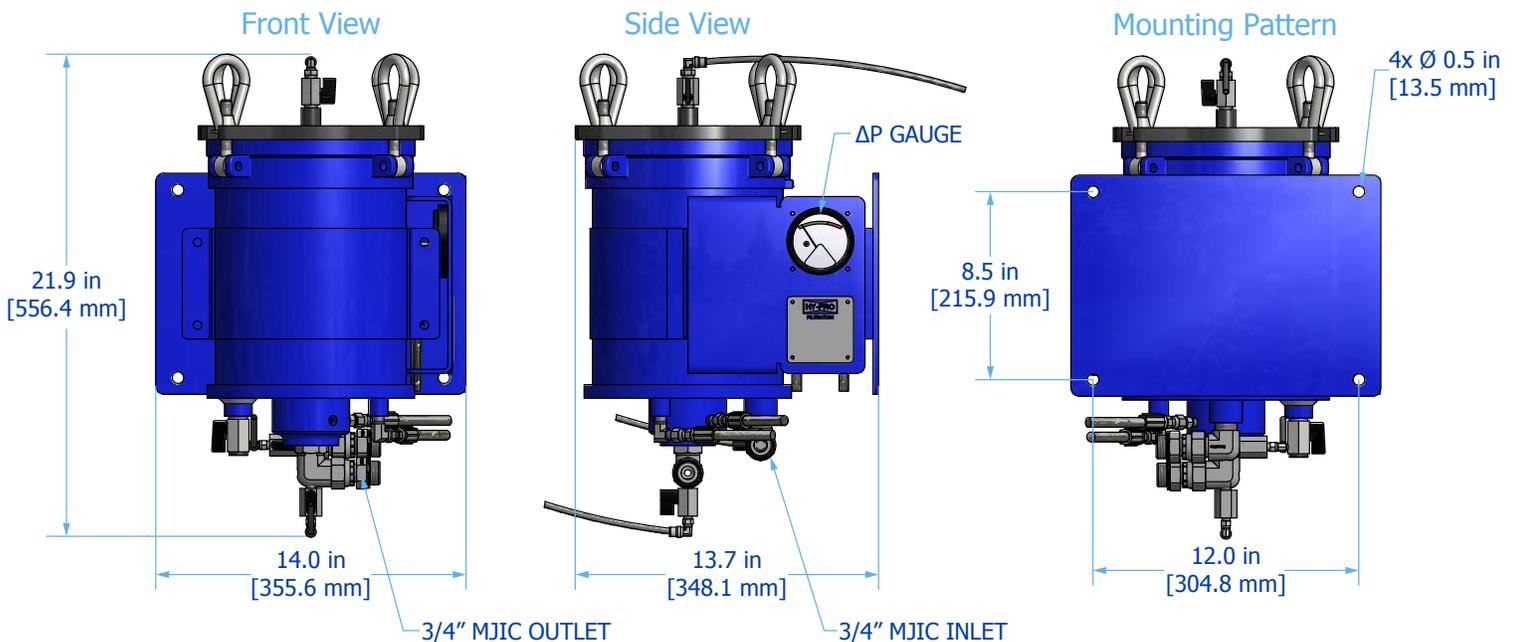

# LFW Specifications

**Dimensions** See Installation Drawings on model specific dimensions.

**Operating Pressure** 150 psi (10 bar) maximum standard.

<b>Operating Temperature</b>	<b>Fluid Temperature</b>	<b>Ambient Temperature</b>
	30°F to 225°F (0°C to 105°C)	-4°F to 140°F (-20C to 60C)

<b>Materials of Construction</b>	<b>Vessel</b>	<b>Element Bypass Valve</b>
	Carbon steel with industrial coating	Nickel plated steel

<b>Media Description</b>	<b>M</b>	<b>A</b>	<b>VTM</b>	<b>W</b>
	G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(C)}} \geq 4000$	G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(C)}} \geq 4000$	$\beta_{0.9_{(C)}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media	Stainless steel wire mesh media $\beta_{x_{(C)}} \geq 2$ ( $\beta_x \geq 2$ )

**Replacement Elements** To determine replacement elements, use corresponding codes from your assembly part number:

<b>Element Type Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>
6	HP106L10 – [Media Selection Code] [Seal Code]	HP106L10-10AB
7	HP107L10 – [Media Selection Code] [Seal Code]	HP107L10-3MV


**Fluid Compatibility** Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.

**Filter Sizing<sup>1</sup>** Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

$\Delta P$ Factors <sup>1</sup>	Units	Media							
		VTM	1M	3M	6L	10M	16M	25M	**W
	psid/gpm	0.1700	0.1670	0.0980	0.0600	0.0390	0.0250	0.0200	0.0160
	bar/lpm	0.0031	0.0030	0.0018	0.0011	0.0007	0.0005	0.0004	0.0003

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# LFW Part Number Builder



Connection	Port Option	Max Flow Rate
<b>G12</b>	¾" G thread (BSPP)	25 gpm (95 lpm) <sup>1</sup>
<b>J12</b>	¾" male JIC with 37° flare	25 gpm (95 lpm) <sup>1</sup>
<b>N12</b>	¾" FNPT	25 gpm (95 lpm) <sup>1</sup>

Element Type	Element Description
<b>6</b>	HP106 coreless element, 25 psid (1.7 bard) integral element bypass
<b>7</b>	HP107 coreless element, 50 psid (3.4 bard) integral element bypass

ΔP Indicator	Indicator Description
<b>D</b>	22 psid visual gauge + electric switch
<b>E</b>	22 psid visual gauge
<b>F</b>	45 psid visual gauge + electric switch
<b>G</b>	45 psid visual gauge
<b>P</b>	2 pressure gages (industrial liquid filled)

Special Options	Option Description
<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
<b>P9<sup>2</sup></b>	Phosphate ester fluid compatibility modification
<b>S2</b>	51" (130 cm) Mounting stand – ships fully assembled
<b>S9<sup>3</sup></b>	Skydrol fluid compatibility modification
<b>W</b>	Automatic air bleed valve

Media Selection	G8 Dualglass	G8 Dualglass + water removal
<b>05M</b>	$\beta_{0.9_{(Cl)}} \geq 4000$	<b>3A</b> $\beta_{4_{(Cl)}} \geq 4000$
<b>1M</b>	$\beta_{3_{(Cl)}} \geq 4000$	<b>6A</b> $\beta_{6_{(Cl)}} \geq 4000$
<b>3M</b>	$\beta_{4_{(Cl)}} \geq 4000$	<b>10A</b> $\beta_{11_{(Cl)}} \geq 4000$
<b>6L</b>	$\beta_{6_{(Cl)}} \geq 4000$	<b>25A</b> $\beta_{22_{(Cl)}} \geq 4000$
<b>10M</b>	$\beta_{11_{(Cl)}} \geq 4000$	
<b>16M</b>	$\beta_{16_{(Cl)}} \geq 4000$	
<b>25M</b>	$\beta_{22_{(Cl)}} \geq 4000$	

VTM	Stainless wire mesh
<b>VTM710<sup>4</sup></b> $\beta_{0.9_{(Cl)}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media	<b>25W</b> 25μ nominal
	<b>40W</b> 40μ nominal
	<b>74W</b> 74μ nominal
	<b>149W</b> 149μ nominal

Seals	Seal Description
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>3</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.

<sup>4</sup>Only available on HP107 series elements. Max recommended flow rate 4 gpm (15 lpm) for HP107L10-VTM710\* elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# S75-76

## Low Pressure Spin-On Filter Assemblies

Donaldson Hy-Pro low pressure S series filters are designed for installation on the return line to remove contaminant ingested or generated by the system. Functions include off-line filtration (kidney loop or filter cart) and some suction applications.

Ideal for automotive manufacturing and assembly machine tools, mobile applications such as waste haulers and transit, filter carts and filter panels, and power unit return line/suction.

**Max Flow Rate: 300 gpm (1,136 lpm)**

**Max Operating Pressure: 200 psi (13.8 bar)**




[hyprofiltration.com/](http://hyprofiltration.com/)



## Media matters.

DFE rated filter elements stay true to efficiency ratings and ensure the highest level of particulate capture and retention capabilities. And with media options down to  $\beta_{3[C]} \geq 4000$  or  $\beta_{5[C]} \geq 4000$  + water removal, you can be sure contamination stays exactly where you want it: out of your fluid.

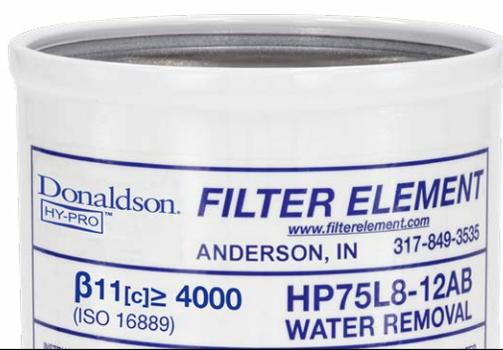

## Multiple configurations.


With a variety of connection types and sizes, mounting options, pressure indicators, media options and sample ports, there is a Spin-On assembly to meet the needs for almost any application.

## Double duty.


S75D assemblies pack double the punch using two Donaldson Hy-Pro Spin-Ons in a parallel flow arrangement. Ideal for high flow or high viscosity applications, these assemblies offer unmatched filtration surface area in a compact size.







**S75 Installation Drawing**

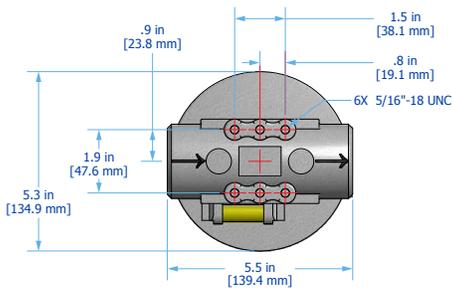

**S75D Installation Drawing**

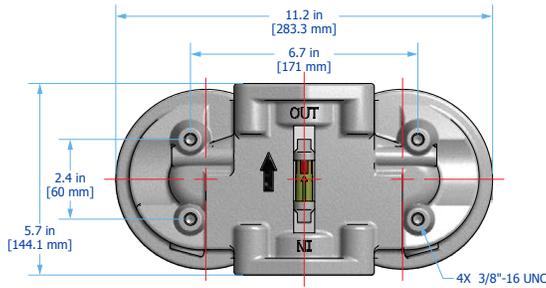

**S76 Installation Drawing**

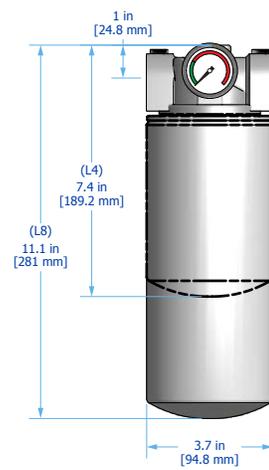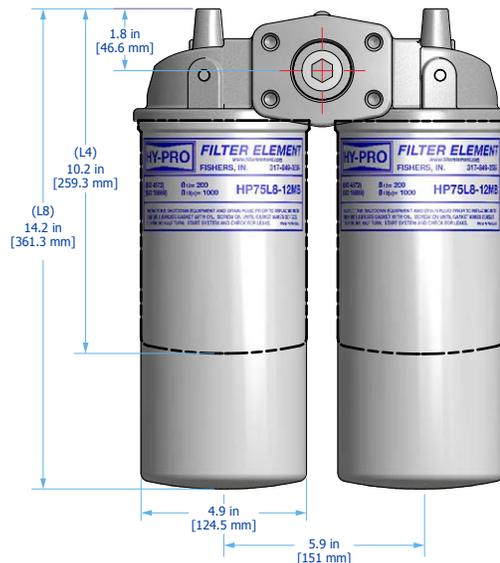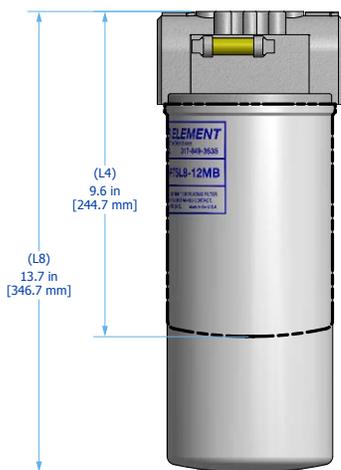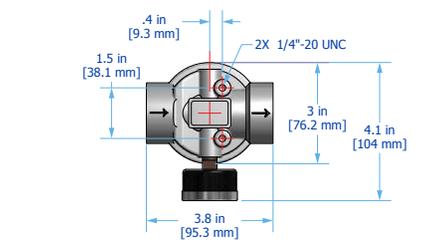


# S75-76 Specifications

<b>Dimensions</b>	See Installation Drawings on for model specific dimensions.												
<b>Operating Temperature</b>	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)			<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)									
<b>Operating Pressure</b>	200 psi (13.8 bar) max												
<b>ΔP Indicator Trigger</b>	22 psi (1.5 bar) or 44 psi (3.0 bar)												
<b>Element Collapse</b>	100 psid (6.9 bard) max												
<b>Materials of Construction</b>	<b>Head</b> Cast aluminum	<b>Can</b> Stamped steel	<b>Element Bypass Valve</b> Nylon	<b>Element End Caps</b> Zinc or Tin coated carbon steel									
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )										
<b>Replacement Elements</b>	To determine replacement elements, use corresponding codes from your assembly part number:												
	<b>Series</b> S75 S75D S76	<b>Filter Element Part Number</b> HP75L[Length Code] – [Media Selection Code] [Seal Code] HP75DL[Length Code] – [Media Selection Code] [Seal Code] HP76L[Length Code] – [Media Selection Code] [Seal Code]			<b>Example</b> HP75L4-25MV HP75DL8-12AB HP76L8-3MB								
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.												
<b>Filter Sizing<sup>1</sup></b>	Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.												
<b>ΔP Factors<sup>1</sup></b>	<b>Series</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>			<b>1M</b>	<b>3M</b>	<b>6M</b>	<b>12M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	S75	L4	psid/gpm	0.332	0.280	0.217	0.195	0.190	0.183	0.033			
			bard/lpm	0.006	0.005	0.004	0.004	0.003	0.003	0.001			
	L8	psid/gpm	0.183	0.155	0.120	0.107	0.105	0.101	0.018				
		bard/lpm	0.003	0.003	0.002	0.002	0.002	0.002	0.000				
	S75D	L4	psid/gpm	0.166	0.140	0.108	0.097	0.095	0.092	0.017			
			bard/lpm	0.003	0.003	0.002	0.002	0.002	0.002	0.000			
	L8	psid/gpm	0.092	0.077	0.060	0.054	0.053	0.051	0.009				
		bard/lpm	0.002	0.001	0.001	0.001	0.001	0.001	0.000				
	S76	L4	psid/gpm	0.573	0.484	0.375	0.336	0.329	0.317	0.057			
			bard/lpm	0.010	0.009	0.007	0.006	0.006	0.006	0.001			
	L8	psid/gpm	0.310	0.261	0.203	0.182	0.178	0.171	0.031				
		bard/lpm	0.006	0.005	0.004	0.003	0.003	0.003	0.001				
	<b>Series</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>			<b>3A</b>	<b>6A</b>	<b>12A</b>	<b>25A</b>	<b>3C</b>	<b>10C</b>	<b>25C</b>
	S75	L4	psid/gpm	0.311	0.241	0.216	0.204	0.448	0.292	0.284			
			bard/lpm	0.006	0.004	0.004	0.004	0.008	0.005	0.005			
	L8	psid/gpm	0.172	0.133	0.119	0.113	0.247	0.161	0.157				
		bard/lpm	0.003	0.002	0.002	0.002	0.005	0.003	0.003				
	S75D	L4	psid/gpm	0.156	0.121	0.108	0.102	0.224	0.146	0.142			
			bard/lpm	0.003	0.002	0.002	0.002	0.004	0.003	0.003			
	L8	psid/gpm	0.086	0.067	0.060	0.056	0.124	0.081	0.078				
		bard/lpm	0.002	0.001	0.001	0.001	0.002	0.001	0.001				
	S76	L4	psid/gpm	0.533	0.413	0.370	0.349	0.774	0.505	0.491			
			bard/lpm	0.010	0.008	0.007	0.006	0.014	0.009	0.009			
	L8	psid/gpm	0.288	0.223	0.200	0.188	0.418	0.273	0.265				
		bard/lpm	0.005	0.004	0.004	0.003	0.008	0.005	0.005				

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# S75-76 Part Number Builder



Series	Series	Max Flow Rate
<b>75</b>	HP75 Series Filter Element, single head	50 gpm (189 lpm) <sup>1</sup>
<b>75D</b>	HP75 Series Filter Elements, double head	100 gpm (379 lpm) <sup>1</sup>
<b>76</b>	HP76 Series Filter Element, single head	30 gpm (111 lpm) <sup>1</sup>

Connection	S75	S75D	S76
<b>B20</b>	1 1/4" BSP	<b>F32</b> 2" Code 61 flange	<b>B12</b> 3/4" BSP
<b>N20</b>	1 1/4" NPT	<b>N24</b> 1 1/2" NPT	<b>N12</b> 3/4" NPT
<b>S20</b>	1 1/4" SAE, 1" - 12	<b>S24</b> 1 1/2" SAE, 1" - 12	<b>N16</b> 1" NPT
			<b>S12</b> 3/4" SAE, 1 1/16" - 12

Element Length	4	8
	4" (10 cm) nominal length filter element	8" (20 cm) nominal length filter element

Bypass	02 <sup>2</sup>	2	3	X
	3 psid (0.2 bard)	25 psid (1.7 bard)	50 psid (3.4 bard)	No bypass

ΔP Indicator	DX <sup>3</sup>	E	G	V <sup>4</sup>	X
	Electrical pressure switch (DIN Connector)	Electrical pressure switch 3-Wire	Visual pressure gauge	Visual ΔP indicator (sliding green to red)	No indicator (port plugged)

Special Options	S
	Oil sampling port on filter head

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Cellulose	Stainless wire mesh
<b>1M</b>	$\beta_{3 Cl} \geq 4000$	<b>3A</b> $\beta_{4 Cl} \geq 4000$	<b>3C</b> $\beta_{5 Cl} > 5$	<b>25W</b> 25μ nominal
<b>3M</b>	$\beta_{4 Cl} \geq 4000$	<b>6A</b> $\beta_{6 Cl} \geq 4000$	<b>10C</b> $\beta_{12 Cl} > 5$	<b>40W</b> 40μ nominal
<b>6M</b>	$\beta_{6 Cl} \geq 4000$	<b>12A</b> $\beta_{11 Cl} \geq 4000$	<b>25C</b> $\beta_{22 Cl} > 5$	<b>74W</b> 74μ nominal
<b>12M</b>	$\beta_{11 Cl} \geq 4000$	<b>25A</b> $\beta_{22 Cl} \geq 4000$		<b>149W</b> 149μ nominal
<b>25M</b>	$\beta_{22 Cl} \geq 4000$			

Seals	B	V	E-WS <sup>5</sup>
	Nitrile (Buna)	Fluorocarbon	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Not available with the S76 series. Only available with "G" or "X" indicator option.

<sup>3</sup>DX option only available on 25psi, 50psi and No Bypass

<sup>4</sup>Only available with S75/S75D, Bypass Option "2" - 25 psid (1.7 bard) & 50 psid (3.4 bard).

<sup>5</sup>Only available with filter element HP75L8-3M

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# F8

## Medium Pressure Filter High Flow Filter Assembly

Ideal for high viscosity lubricating fluids, high flow hydraulic, and heavily contaminated fuel applications. Drop-in mounting interchange for common pulp and paper industry 8300/8310/8314 filter assemblies.

**Max Flow Rate: 300 gpm (1,136 lpm)**

**Max Operating Pressure: 500 psi (34.5 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter.

Advanced DFE rated filter elements deliver lower operating ISO Codes with high efficiency particulate removal and retention efficiency. With a range of media options down to  $\beta_{3_{(c)}} > 4000$  + water absorbing options, you get the perfect element for your application, every time.



## Minimize the mess.


The top loading housing on F8 filter assemblies provide easy and clean access when servicing or changing the element. Accessing the element is as simple as removing the housing cover, meaning you have no heavy bowl to lift and can get back in operation more quickly than ever.

## Setting the new (industry) standard.


Designed as a drop-in replacement for industry standard 8300 series filter housings, only the F8 from Donaldson Hy-Pro gives you the flexibility to choose from numerous DFE rated filter arrangements. Even upgrade your existing 83\*\* series filter elements with the HP107 series to get a new integral bypass valve with every filter.




## F8 Installation Drawing

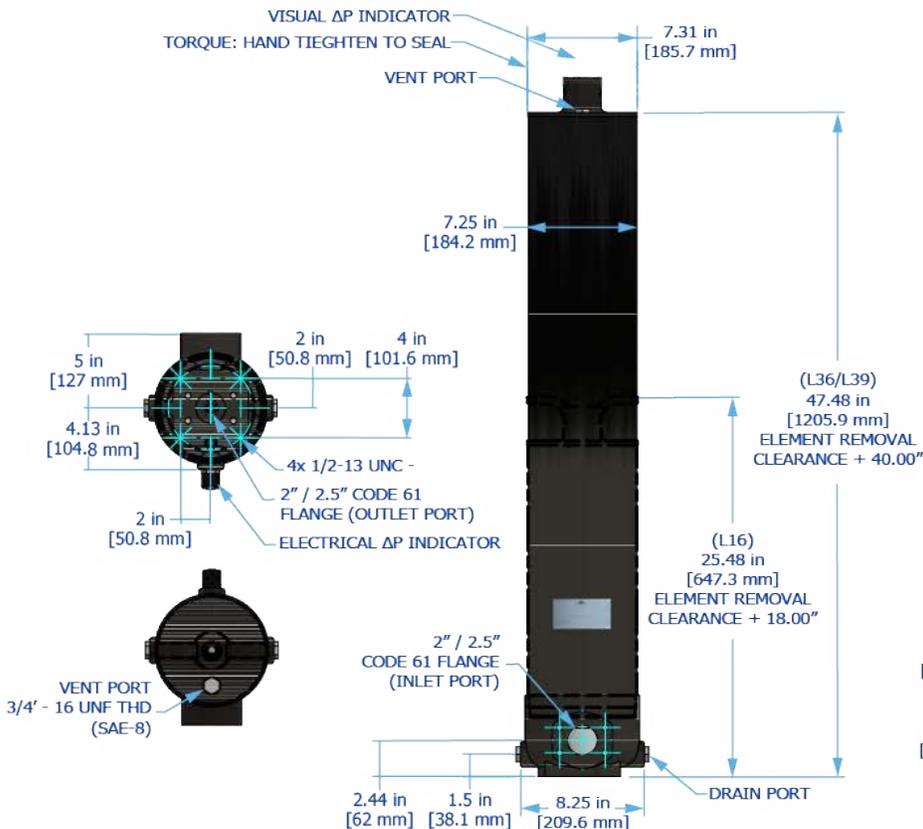

## M1 Option Mounting Stand

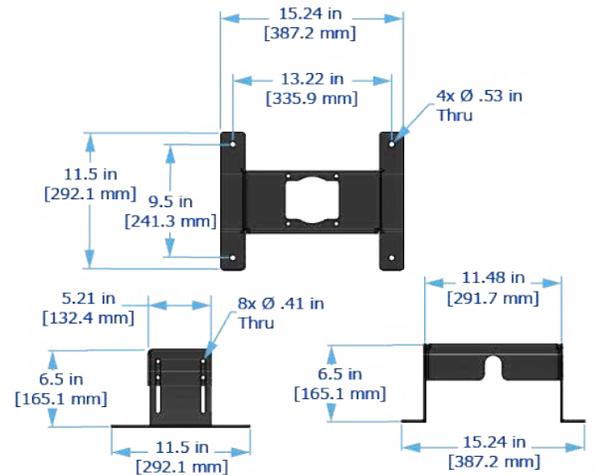

## M2 Option Stabilizing Bracket

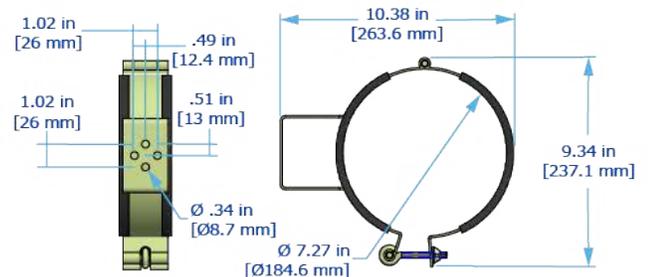

# F8 Specifications

<b>Dimensions</b>	See Installation Drawings for model specific dimensions.								
<b>Operating Temperature</b>	-20°F to 250°F (-29°C to 121°C)								
<b>Operating Pressure</b>	500 psi (34.5 bar) max								
<b>ΔP Indicator Trigger</b>	15 psi (1 bar): 25 psid bypass 35 psi (2.4 bar): 50 psid bypass + non bypass								
<b>Materials of Construction</b>	<b>Head/Lid</b> Cast aluminum (coated)			<b>Bowl</b> Industrial coated steel					
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(c)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(c)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(c)}} \geq 2$	<b>VTM</b> $\beta_{0.9_{(c)}} \geq 4000$ particulate, insoluble oxidation by-product and water removal media					
<b>Replacement Elements</b>	To determine replacement elements, use corresponding codes from your assembly part number:								
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>						<b>Example</b>	
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]						HP105L36–6AB	
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]						HP106L16–10MV	
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]						HP107L36–1MV	
	32	HP8310L[Length Code] – [Media Selection Code][Seal Code]						HP8310L16–25AV	
	35	HP8310L[Length Code] – [Media Selection Code][Seal Code]						HP8310L39–3MB	
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]						HP8314L39–25WV	
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]						HP8314L16–12MB	
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]						HP8314L39–16ME–WS	
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids, #2 diesel fuels (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.								
<b>ΔP Factors<sup>1</sup></b>	<b>Length</b>	<b>Units</b>	<b>Media</b>						
			<b>1M</b>	<b>3M</b>	<b>6L</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	16	psid/gpm	0.0463	0.0391	0.0303	0.0271	0.0266	0.0256	0.0046
		bard/lpm	0.0008	0.0007	0.0006	0.0005	0.0005	0.0005	0.0001
	36/39	psid/gpm	0.0324	0.0273	0.0212	0.0190	0.0186	0.0179	0.0032
		bard/lpm	0.0006	0.0005	0.0004	0.0003	0.0003	0.0003	0.0001

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on for viscosity change.

# F8 Part Number Builder



Connection	Port Option	Max Flow Rate
<b>F32</b>	2" Code 61 flange	300 gpm (1,136 lpm) <sup>1</sup>
<b>F40</b>	2.5" Code 61 flange	300 gpm (1,136 lpm) <sup>1</sup>

Element Type	Element Description	Element Description
<b>5</b>	HP105 – no bypass	<b>32</b> HP8310 – 25 psid (1.7 bard) integral housing bypass
<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass	<b>35</b> HP8310 – 50 psid (3.4 bard) integral housing bypass
<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass	<b>8X</b> HP8314 – no bypass
		<b>82</b> HP8314 – 25 psid (1.7 bard) integral housing bypass
		<b>85</b> HP8314 – 50 psid (3.4 bard) integral housing bypass

Element Length	Element Description
<b>16</b>	L16 single length filter housing
<b>36<sup>2</sup></b>	L36 single length filter housing
<b>39<sup>2</sup></b>	L39 single length filter housing

ΔP Indicator	Indicator Options	Thermal Lockout	Surge Control	Reset
<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
<b>S</b>	Visual / Electrical (DIN 43650)	Yes	Yes	Manual
<b>V</b>	Visual	No	No	Auto
<b>X</b>	No indicator (port plugged)	–	–	–
<b>Y</b>	Visual	Yes	Yes	Manual

Special Options	Special Options
<b>M1</b>	Mounting stand for base mount applications
<b>M2</b>	Stabilizing bracket

Media Selection	G8 Dualglass	G8 Dualglass + water removal
<b>0.5M</b>	$\beta_{0.9_{(C)}} \geq 4000$	<b>3A</b> $\beta_{4_{(C)}} \geq 4000$
<b>1M</b>	$\beta_{3_{(C)}} \geq 4000$	<b>6A</b> $\beta_{6_{(C)}} \geq 4000$
<b>3M</b>	$\beta_{4_{(C)}} \geq 4000$	<b>10A<sup>3</sup></b> $\beta_{11_{(C)}} \geq 4000$
<b>6L</b>	$\beta_{6_{(C)}} \geq 4000$	<b>25A</b> $\beta_{22_{(C)}} \geq 4000$
<b>10M<sup>3</sup></b>	$\beta_{11_{(C)}} \geq 4000$	
<b>16M</b>	$\beta_{16_{(C)}} \geq 4000$	
<b>25M</b>	$\beta_{22_{(C)}} \geq 4000$	

Dynafuzz stainless fiber	Stainless wire mesh
<b>3SF</b> $\beta_{4_{(C)}} \geq 4000$	<b>25W</b> 25μ nominal
<b>6SF</b> $\beta_{6_{(C)}} \geq 4000$	<b>40W</b> 40μ nominal
<b>10SF</b> $\beta_{11_{(C)}} \geq 4000$	<b>74W</b> 74μ nominal
<b>25SF</b> $\beta_{22_{(C)}} \geq 4000$	<b>149W</b> 149μ nominal

Seals	Seal Options
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Compatibility will be based on Element Type selection. For elements HP105, HP106, and HP107, use Length Code 36. Length Code 39 only compatible with HP8310 and HP8314.

<sup>3</sup>For elements HP8310 and HP8314, use 12M or 12A for respective media code in place of 10M or 10A.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# MF3

## Medium Pressure Filter Assemblies

Ideal for mobile equipment return line applications as an alternative to spin-ons, on-board fuel and dispensing and hydrostatic charge circuits.

**Max Flow Rate: 100 gpm (379 lpm)**

**Max Operating Pressure: 1,200 psi (83 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3(C)} \geq 4000$ , + water absorption, you get the perfect element for your application, every time.



## HF3 Compatible Design.


Port to port dimension, mounting pattern, and element design meet HF3 automotive specification. And with standard SAE drain ports, lightweight aluminum bowls, and knurled texture on the bowls provide ease for element servicing, you get all of the convenience you want with the compatibility you need.

## Inherently versatile.

Unique internal flow paths providing a low clean pressure drop and element sizes from 4", the MF3 can be used in a variety of applications including Hydrostatic charge circuit for mobile equipment, CAT 5-Star service center, and return line alternative to spin-on assemblies.



## MF3 Installation Drawing

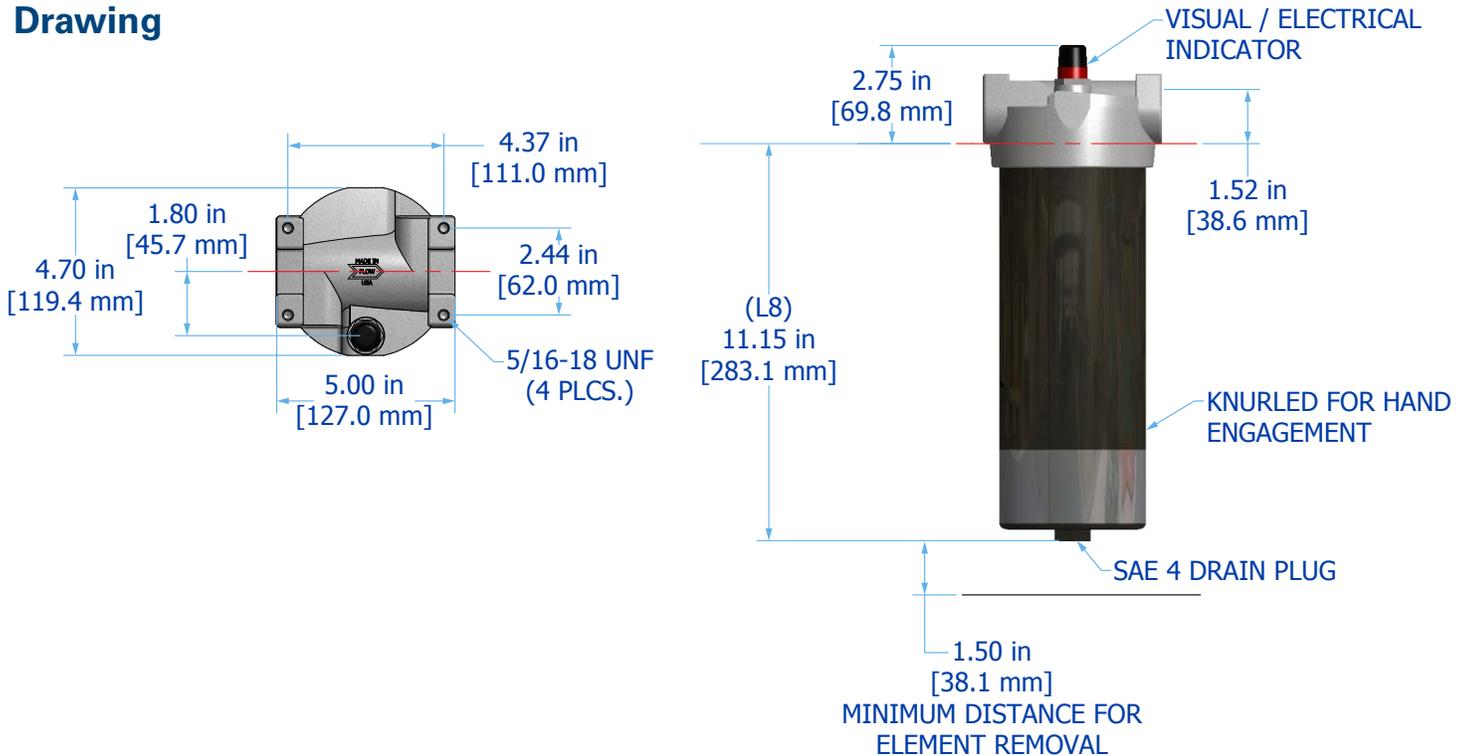

# MF3 Specifications

**Dimensions** See Installation Drawings for model specific dimensions.

<b>Operating Temperature</b>	<b>Fluid Temperature</b>	<b>Ambient Temperature</b>
	30°F to 225°F (0°C to 105°C)	-4°F to 140°F (-20C to 60C)

**Operating Pressure** 1200 psi (83 bar) max

**Burst Pressure** 3000 psi (206.8 bar) max

**ΔP Indicator Trigger** 22 psid (1.52 bard) for 25 psid bypass  
45 psid (3.10 bard) for 50 psid bypass and non bypass

**Element Collapse Rating** 290 psid (20 bard)

<b>Materials of Construction</b>	<b>Head</b>	<b>Bowl</b>	<b>Element Bypass Valve</b>	<b>Element End Caps</b>
	Cast aluminum	L4/L8: Cast aluminum	Nylon	Zinc or Tin coated carbon steel

<b>Media Description</b>	<b>M</b>	<b>A</b>	<b>W</b>
	G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$	G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$	Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$ ( $\beta_x \geq 2$ )

**Replacement Elements** To determine replacement elements, use corresponding codes from your assembly part number:

<b>Filter Element Part Number</b>	<b>Example</b>
HP60L[Length Code] – [Media Selection Code] [Seal Code]	HP60L16-6MB


**Fluid Compatibility** Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.

**Filter Sizing<sup>1</sup>** Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

ΔP Factors <sup>1</sup>	Length	Units	Media						
			1M	3M	6M	12M	16M	25M	**W
L8		psid/gpm	0.324	0.252	0.206	0.156	0.151	0.143	0.026
		bard/lpm	0.006	0.005	0.004	0.003	0.003	0.003	0.000

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# MF3 Part Number Builder



Connection	Port Option	Max Flow Rate
<b>G20</b>	1.25" G thread (BSPP)	75 gpm (284 lpm) <sup>1</sup>
<b>N20</b>	1.25" NPT	75 gpm (284 lpm) <sup>1</sup>
<b>N24</b>	1.5" NPT	100 gpm (379 lpm) <sup>1</sup>
<b>S20</b>	1.25" SAE	75 gpm (284 lpm) <sup>1</sup>
<b>S24</b>	1.5" SAE	100 gpm (379 lpm) <sup>1</sup>

Element Length	8	8" (20 cm) nominal length filter element and housing
----------------	---	--

Bypass	1	25 psid (1.7 bard) bypass
	<b>3</b>	50 psid (3.4 bard) bypass
	<b>X</b>	No bypass

ΔP Indicator	D	Visual with electric switch (DIN Connection)
	<b>V</b>	Visual/Mechanical
	<b>X</b>	No indicator (port plugged)

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
	<b>1M</b> $\beta_{3(c)} \geq 4000$	<b>3A</b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25μ nominal
	<b>3M</b> $\beta_{4(c)} \geq 4000$	<b>6A</b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40μ nominal
	<b>6M</b> $\beta_{6(c)} \geq 4000$	<b>12A</b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74μ nominal
	<b>12M</b> $\beta_{11(c)} \geq 4000$	<b>25A</b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149μ nominal
	<b>16M</b> $\beta_{16(c)} \geq 4000$		
	<b>25M</b> $\beta_{22(c)} \geq 4000$		

Seals	B	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS<sup>2</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.  
<sup>2</sup>Only available with ΔP Indicator option "X" selected.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# MF

## Medium Pressure Filter Assemblies

Donaldson Hy-Pro's MF90, MF110 and MF480 medium pressure filters are designed to protect sensitive components in hydraulic and transmission circuits. Install the series upstream of specific components or directly after the pressure pump in mid-flow systems to minimize risk of failure and costly system downtime.

Ideal for use as a charge pump discharge filter or a pilot filter, and to protect components that are sensitive to particulate contamination and require clean pressurized fluid for reliable operation.

**Max Flow Rate: 100 gpm (379 lpm)**

**Max Operating Pressure: 580 psi (40 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Elements that go beyond industry standard.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3(C)} \geq 4000$ , + water absorption, you get the perfect element for your application, every time.



205



### Industrial duty.

Standard mounting holes, a variety of port options and indicator options, and several length options with standard drain ports make the MF series the ideal choice for heavy duty hydraulic filtration.

### Easy servicing.

When a new element is installed in the bowl, special slots in the MF bowls allow tabs in the elements' locking grab handles to freely rotate as the bowl is threaded onto the matching head. In this way, the element automatically finds the proper orientation to engage its unique, proprietary seal with the matching seal surface in the head.



### Unique applications.

With the unique element design, the MF90, MF110 and MF480 are ideal for applications with limited space for bowl clearance during servicing. Only 2.56" (65mm) of clearance is required as the proprietary locking grab handles retain the element inside the filter bowl during removal, automatically withdrawing the element from its seal as the bowl is rotated off during servicing. Simply pinch the locking grab handles to remove the used element from the bowl.


### Minimize the mess.

The MF series come standard with bowl drains to minimize mess during servicing. Even better, this MF series retains the element cartridge using a slot in the bowl and locking grab handles on the elements. No need to reach in and pry off the used element, let the bowl removal do the work for you.



### The ideal choice for hydraulics.

Use the MF as the main pressure filter(s) in medium pressure hydraulic systems or upstream of sensitive components as a pilot filter to protect your valves and actuators. Engineered to provide lower operating ISO Codes than what is required for compliance with hydraulics component manufacturers' warranties, they are well-suited for hydrostatic charge pump filtration and power shift transmission applications.

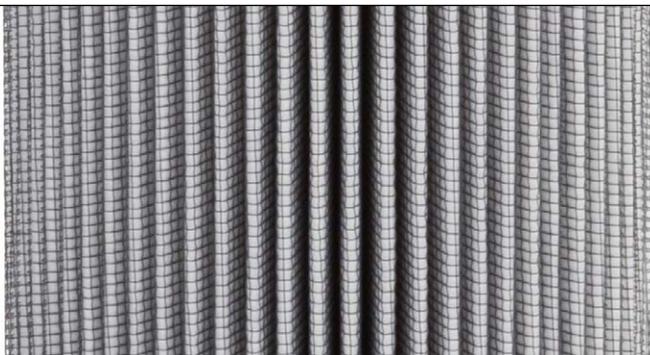

# MF Sizing Guidelines

## Filter Sizing<sup>1</sup>


Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See above for filter assembly sizing guidelines. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

## $\Delta P$ Factors<sup>1</sup>

Series	Length	Units	Media						<b>**W</b>
			<b>1M</b>	<b>3M</b>	<b>6M</b>	<b>10/12M</b>	<b>16M</b>	<b>25M</b>	
MF90	L9	psid/gpm	0.533	0.405	0.334	0.285	0.269	0.254	
		bar/lpm	0.010	0.007	0.006	0.005	0.005	0.005	
MF110	L8	psid/gpm	0.447	0.327	0.261	0.215	0.200	0.186	
		bar/lpm	0.008	0.006	0.005	0.004	0.004	0.003	
	L11	psid/gpm	0.335	0.251	0.204	0.172	0.162	0.152	
		bar/lpm	0.006	0.005	0.004	0.003	0.003	0.003	
MF480	L11	psid/gpm	0.214	0.155	0.122	0.099	0.092	0.085	
		bar/lpm	0.004	0.003	0.002	0.002	0.002	0.002	
			<b>1A</b>	<b>3A</b>	<b>6A</b>	<b>10/12A</b>	<b>16A</b>	<b>25A</b>	<b>**W</b>
MF90	L9	psid/gpm	0.600	0.446	0.360	0.301	0.283	0.265	0.212
		bar/lpm	0.011	0.008	0.007	0.005	0.005	0.005	0.004
MF110	L8	psid/gpm	0.509	0.365	0.285	0.230	0.213	0.196	0.147
		bar/lpm	0.009	0.007	0.005	0.004	0.004	0.004	0.003
	L11	psid/gpm	0.379	0.278	0.221	0.183	0.171	0.159	0.124
		bar/lpm	0.007	0.005	0.004	0.003	0.003	0.003	0.002
MF480	L11	psid/gpm	0.245	0.174	0.134	0.107	0.098	0.090	0.065
		bar/lpm	0.004	0.003	0.002	0.002	0.002	0.002	0.001


<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

## MF480 Installation Drawing

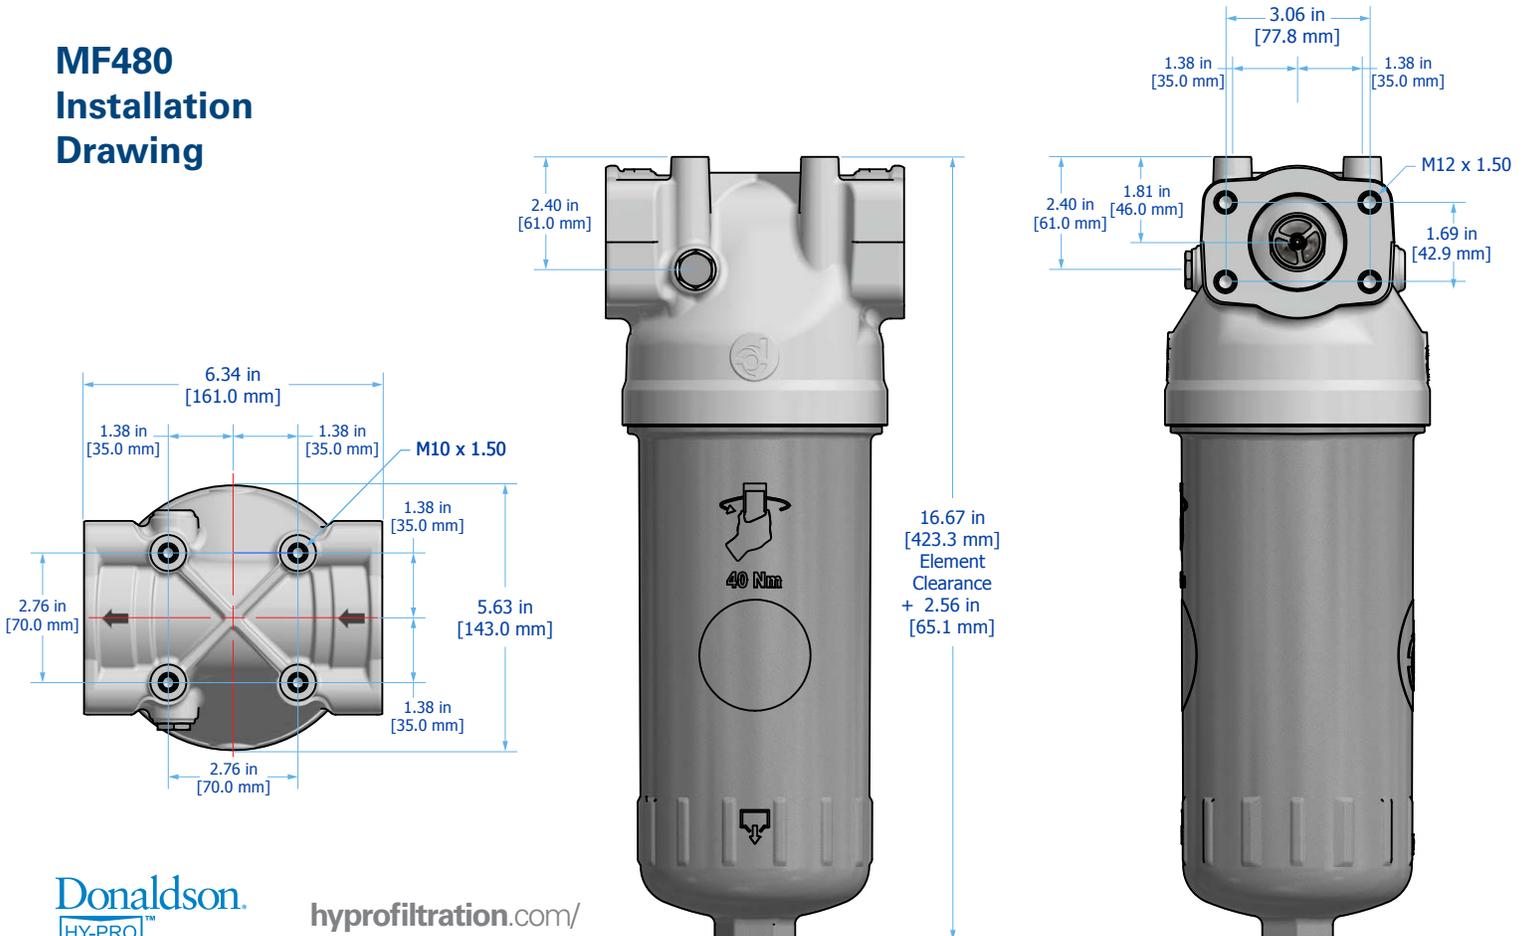


# MF Installation Drawings

## MF90 Installation Drawing

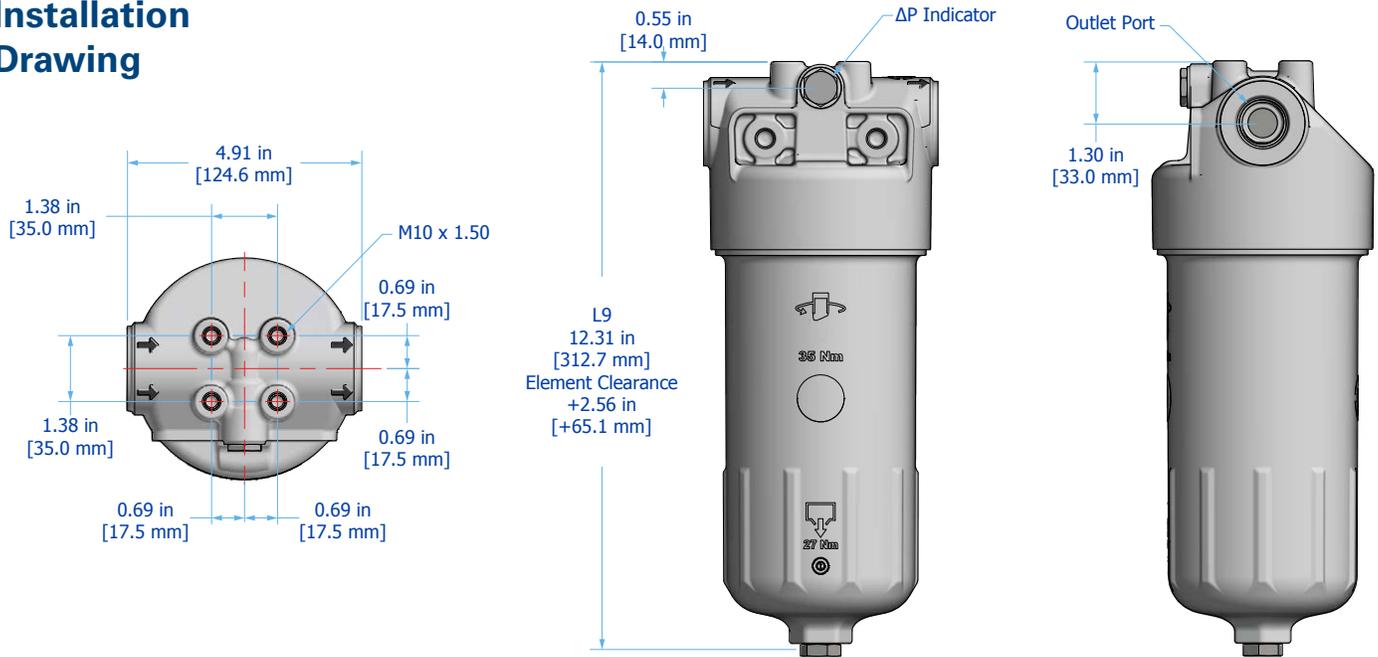

## MF110 Installation Drawing

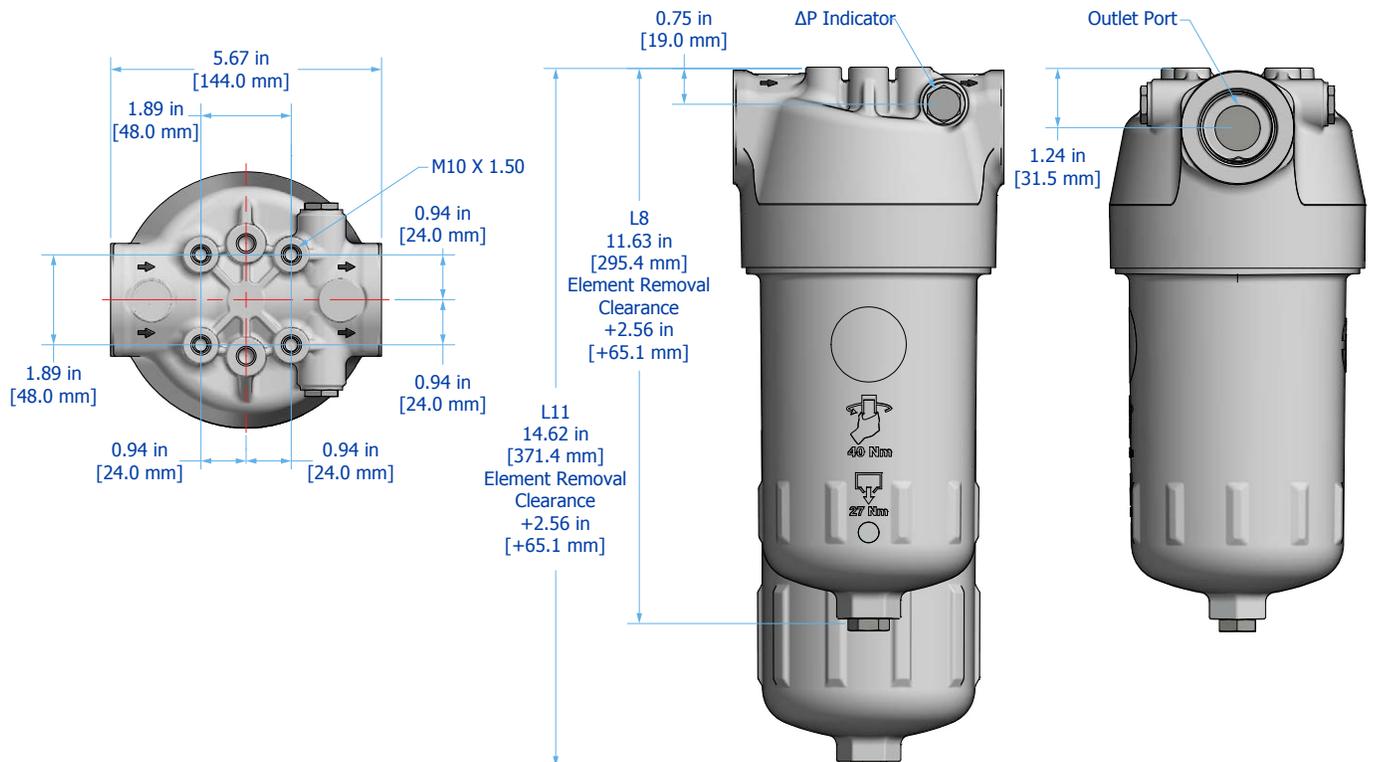

# MF Specifications

<b>Dimensions</b>	See Installation Drawings for model specific dimensions.		
<b>Approximate Weight<sup>1</sup></b>	<b>MF90</b> L9: 5.2 lbs (2.36 kg)	<b>MF110</b> L8: 6.2 lbs (2.82 kg) L11: 7.0 lbs (3.18 kg)	<b>MF480</b> L11: 10.5 pounds (4.76 kg)
<b>Operating Temperature</b>	-20°F to 250°F (-29°C to 121°C)		
<b>Operating Pressure</b>	<b>MF90</b> 580 psi (40 bar) max	<b>MF110</b> 435 psi (30 bar) max	<b>MF480</b> 508 psi (35.1 bar) max
<b>Burst Pressure</b>	<b>MF90</b> 2000 psi (138 bar) max	<b>MF110</b> 1300 psi (90 bar) max	<b>MF480</b> 2000 psi (138 bar) max
<b>ΔP Indicator Trigger</b>	18 psid (1.2 bard) for 25 psid bypass 40 psid (2.8 bard) for 50 psid bypass and non bypass		
<b>Element Collapse Rating</b>	150 psid (10.7 bard)		
<b>Materials of Construction</b>	<b>Head</b> Cast aluminum	<b>Bowl</b> Cast aluminum	
<b>Media Description</b>	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$
<b>Replacement Elements</b>	To determine replacement elements, use corresponding codes from your assembly part number:		
	<b>Series</b> MF90 MF110 MF480	<b>Filter Element Part Number</b> HP90NL[Length Code] – [Media Selection Code] [Seal Code] HP110NL[Length Code] – [Media Selection Code] [Seal Code] HP480NL[Length Code] – [Media Selection Code] [Seal Code]	<b>Example</b> HP90NL9-10AB HP110NL11-3MB HP480NL11-3MB
<b>Fluid Compatibility</b>	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.		

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# MF Part Number Builder



<b>Series</b>	<b>90</b>	Nominal flow rate up to 40 gpm (151 lpm) <sup>1</sup>
	<b>110</b>	Nominal flow rate up to 75 gpm (284 lpm) <sup>1</sup>
	<b>480</b>	Nominal flow rate up to 100 gpm (379 lpm) <sup>1</sup>

<b>Connection</b>	<b>MF90</b>	<b>MF110</b>	<b>MF480</b>			
	<b>G12</b>	0.75" G Thread (BSPP)	<b>G20</b>	1.25" G thread (BSPP)	<b>F32</b>	2" Code 61 Flange w/ Metric Threads
	<b>G16</b>	1" G thread (BSPP)	<b>S20</b>	1.25" SAE		
	<b>S12</b>	3/4" SAE				
	<b>S16</b>	1" SAE				

<b>Element Length</b>	<b>MF90</b>	<b>MF110</b>	<b>MF480</b>			
	<b>9</b>	9" (23 cm) nominal length filter element	<b>8</b>	8" (20 cm) nominal length filter element	<b>11</b>	11" (28 cm) nominal length filter element
			<b>11</b>	11" (28 cm) nominal length filter element		

<b>Bypass</b>	<b>2</b>	25 psid (1.7 bard) bypass
	<b>3</b>	50 psid (3.4 bard) bypass
	<b>X</b>	No bypass

<b>ΔP Indicator</b>	<b>Indicator Options</b>		<b>Electrical Specifications</b>		<b>Connector</b>	
	<b>A</b>	DC 2 wire N.C. (50 psid bypass only)	100 mA DC @ 30 VDC		Metri-pack 150 Series, AWG 18	
	<b>B</b>	DC 2 wire N.O.	200 mA DC @ 30 VDC		Packard Weatherpack, AWG 18	
	<b>C</b>	Single post DC N.O.	200 mA DC @ 30 VDC		10-32UNF threaded post	
	<b>E</b>	AC/DC 3-wire	-		AWG 18	
	<b>F</b>	DC 3 wire N.C.	100 mA DC @ 30 VDC		AWG 18	
	<b>V</b>	Visual Pop-Up	-		-	
<b>X</b>	No indicator (port plugged)			-		

<b>Special Options</b>	<b>M2</b>	Mounting Bracket
------------------------	-----------	------------------

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>Stainless wire mesh</b>	
	<b>1M</b>	β <sub>3(c)</sub> ≥ 4000	<b>3A</b>	β <sub>4(c)</sub> ≥ 4000	<b>25W</b>	25μ nominal
	<b>3M</b>	β <sub>4(c)</sub> ≥ 4000	<b>6A</b>	β <sub>6(c)</sub> ≥ 4000	<b>40W</b>	40μ nominal
	<b>6M</b>	β <sub>6(c)</sub> ≥ 4000	<b>10A</b>	β <sub>11(c)</sub> ≥ 4000	<b>74W</b>	74μ nominal
	<b>10M</b>	β <sub>11(c)</sub> ≥ 4000	<b>25A</b>	β <sub>22(c)</sub> ≥ 4000	<b>149W</b>	149μ nominal
	<b>16M</b>	β <sub>16(c)</sub> ≥ 4000				
	<b>25M</b>	β <sub>22(c)</sub> ≥ 4000				

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS<sup>2</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Only available with ΔP Indicator option "X" selected.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PF2

## High Pressure In-line Filter Assembly

Ideal for a variety of applications including mobile applications, paper and saw mills, power generation, general industrial machine tools, and automotive manufacturing. With HF2 compatible port-to-port dimension, mounting pattern, and element design to meet the automotive manufacturing standard.

**Max Flow Rate: 20 gpm (76 lpm)**

**Max Operating Pressure: 4000 psi (275 bar)**

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Elements that go beyond industry standard.

G8 Dualglass and PE glass elements are DFE rated to assure performance even when exposed to the toughest hydraulic systems and provide unmatched particulate capture and retention to remove contamination from your hydraulic and lube oils, for good.



## Small size, huge results.


The compact size of PF2 filter assemblies make them the perfect addition directly upstream of your control valves and other sensitive components even in the tightest of spaces. And with two different mounting options to choose from, the incredible versatility of the PF2 makes it ideal for all of your high pressure filter applications.

## Works under pressure.


Applications for the PF2 include mobile, general industrial machine tools, paper mills, sawmills, and speed control circuits for power generation systems. So whether you're operating waste haulers, cement mixers, fire trucks, cranes, or CNC routers, you can be sure the PF2 will protect your critical components even when the pressure is on.



## In-Line Mount Installation Drawing

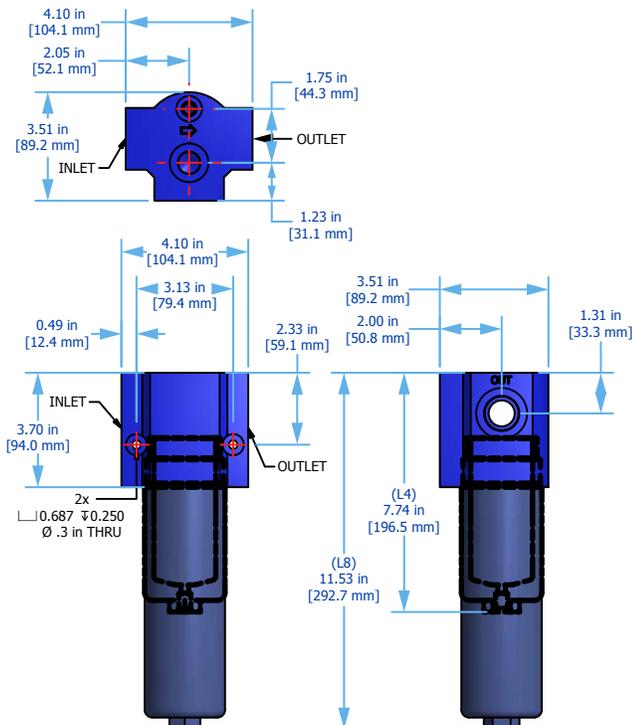

## Manifold Mount Installation Drawing

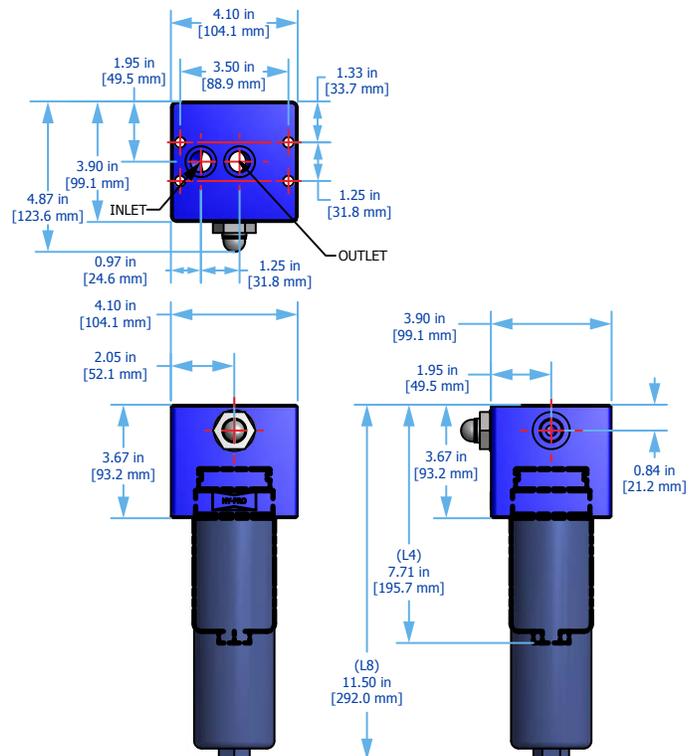


# PF2 Specifications

Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)											
Operating Pressure	4000 psi (275 bar) max												
Flow Fatigue Rating	2000 psi (137 bar)												
Burst Pressure	12,000 psi (827 bar) max												
ΔP Indicator Trigger	35 psid (2.4 bard) for 50 psid (3.4 bard) bypass. 70 psid (4.8 bard) for 90 psid (6.2 bard) bypass. 100 psid (6.9 bard) for no bypass.												
Element Collapse Rating	<b>Normal Collapse</b> 290 psid (20 bard)	<b>High Collapse</b> 3000 psid (206 bard)											
Integral Bypass Setting	50 psid (3.4 bard) 90 psid (6.2 bard)												
Materials of Construction	<b>Head</b> Anodized aluminum (grade T6061)	<b>Bowl</b> Anodized aluminum (grade T6061) Bowl drain #4 SAE standard	<b>Element Bypass Valve</b> Nickel plated/Stainless steel										
			<b>Element End Caps</b> Zinc or Tin coated carbon steel										
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{ci}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{ci}} \geq 4000$	<b>SF</b> Dynafuzz stainless steel fiber media $\beta_{x_{ci}} \geq 4000$										
			<b>W</b> Stainless steel wire mesh media $\beta_{x_{ci}} \geq 2$ ( $\beta_x \geq 2$ )										
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number: <b>Filter Element Part Number</b> HP2[Collapse Rating Code]L[Length Code] – [Media Selection Code] [Seal Code]												
			<b>Example</b> HP20L4-12MW										
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.												
Filter Assembly Sizing <sup>1</sup>	Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.												
	Step 1: Calculate ΔP coefficient for actual viscosity												
	<div style="border: 1px solid black; padding: 5px;"> <p><b>Using Saybolt Universal Seconds (SUS)</b></p> <math display="block">\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (SUS)}}{150} \times \frac{\text{Actual Specific Gravity}}{0.86}</math> </div>	or	<div style="border: 1px solid black; padding: 5px;"> <p><b>Using Centistokes (cSt)</b></p> <math display="block">\Delta P \text{ Coefficient} = \frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32} \times \frac{\text{Actual Specific Gravity}}{0.86}</math> </div>										
	Step 2: Calculate actual clean filter assembly ΔP at both operating and cold start viscosity												
	<div style="border: 1px solid black; padding: 5px;"> <math display="block">\text{Actual Assembly Clean } \Delta P = \text{Flow Rate} \times \Delta P \text{ Coefficient (from Step 1)} \times \text{Assembly } \Delta P \text{ Factor (from sizing table)}</math> </div>												
ΔP Factors <sup>1</sup>	Collapse	Length	Units	Media	1M	2M	3M	6M	12M	15M	16M	25M	**W
	20	L4	psid/gpm	2.145	N/A	1.810	1.403	1.258	N/A	1.231	1.185	0.213	
			bard/lpm	0.039	N/A	0.033	0.026	0.023	N/A	0.022	0.022	0.004	
	20	L8	psid/gpm	1.118	N/A	0.944	0.731	0.656	N/A	0.642	0.618	0.111	
			bard/lpm	0.020	N/A	0.017	0.013	0.012	N/A	0.012	0.011	0.002	
	21	L4	psid/gpm	2.287	1.930	N/A	1.496	N/A	1.341	1.312	1.264	0.228	
			bard/lpm	0.042	0.035	N/A	0.027	N/A	0.024	0.024	0.024	0.023	0.004
	21	L8	psid/gpm	1.188	1.003	N/A	0.777	N/A	0.672	0.657	0.647	0.116	
			bard/lpm	0.022	0.018	N/A	0.014	N/A	0.012	0.012	0.012	0.012	0.002

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.

# PF2 Part Number Builder



Connection	Port Option	Max Flow Rate
	<b>G12</b> <sup>1</sup> ¼" G thread (BSPP)	20 gpm (76 lpm) <sup>2</sup>
	<b>M12</b> ¼" Manifold top mount	20 gpm (76 lpm) <sup>2</sup>
	<b>S12</b> <sup>1</sup> ¼" SAE	20 gpm (76 lpm) <sup>2</sup>

Collapse Rating	Option	Description
<b>0</b> <sup>3</sup>	290 psid (20 bard)	normal collapse element
<b>1</b>	3000 psid (206 bard)	high collapse element

Element Length	Option	Description
<b>4</b>	4" (10 cm)	nominal length filter element and housing
<b>8</b>	8" (20 cm)	nominal length filter element and housing

Bypass	Option	Description
<b>3</b>	50 psid (3.4 bard)	bypass
<b>6</b>	90 psid (6.2 bard)	bypass
<b>X</b> <sup>5</sup>		No bypass

ΔP Indicator	Indicator Options	Thermal Lockout	Surge Control	Reset
<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
<b>S</b>	Visual / Electrical (DIN 43650)	Yes	Yes	Manual
<b>V</b>	Visual	No	No	Auto
<b>X</b>	No indicator (port plugged)	-	-	-
<b>Y</b>	Visual only	Yes	Yes	Manual

Media Selection	G8 Dualglass		G8 Dualglass + water removal	
	<b>1M</b>	$\beta_{3(C)} \geq 4000$	<b>3A</b> <sup>5</sup>	$\beta_{4(C)} \geq 4000$
<b>2M</b> <sup>4</sup>	$\beta_{4(C)} \geq 4000$	<b>6A</b> <sup>5</sup>	$\beta_{6(C)} \geq 4000$	
<b>3M</b> <sup>5</sup>	$\beta_{4(C)} \geq 4000$	<b>12A</b> <sup>5</sup>	$\beta_{11(C)} \geq 4000$	
<b>6M</b>	$\beta_{6(C)} \geq 4000$	<b>25A</b> <sup>5</sup>	$\beta_{22(C)} \geq 4000$	
<b>12M</b> <sup>5</sup>	$\beta_{11(C)} \geq 4000$			
<b>15M</b> <sup>4</sup>	$\beta_{11(C)} \geq 4000$			
<b>16M</b>	$\beta_{16(C)} \geq 4000$			
<b>25M</b>	$\beta_{22(C)} \geq 4000$			

Dynafluff stainless fiber		Stainless wire mesh	
<b>3SF</b>	$\beta_{4(C)} \geq 4000$	<b>10W</b>	10μ nominal
<b>10SF</b>	$\beta_{11(C)} \geq 4000$	<b>25W</b>	25μ nominal
		<b>40W</b>	40μ nominal
		<b>74W</b>	74μ nominal
		<b>149W</b>	149μ nominal

Seals	Option	Description
<b>B</b>		Nitrile (Buna)
<b>V</b>		Fluorocarbon
<b>E-WS</b>		EPR seals + stainless steel support mesh

<sup>1</sup>Vent connection standard on G12 and S12 models - #4 SAE.

<sup>2</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>3</sup>When chosen, must be paired with Bypass option "3" or "6."

<sup>4</sup>Compatible only with High Collapse Rating option "1."

<sup>5</sup>Not available on High Collapse Rating option "1."

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PF4

## High Pressure Base Mounted Filter Assemblies

Donaldson Hy-Pro PF4 pressure filters are designed for protecting sensitive components in hydraulic circuits. Install the series upstream of specific components or directly after the pressure pump to minimize risk of failure and costly system downtime.

Ideal for components that are sensitive to particulate contamination, such as the servo valve, and require clean pressurized fluid for reliable operation.

**Max Flow Rate: 150 gpm (568 lpm)**

**Max Operating Pressure: 6,000 psi (414 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Filtration starts with the filter.

G8 Dualglass elements are DFE rated to assure performance even when exposed to the toughest hydraulic systems and provide unmatched particulate capture and retention to protect servo valves and ensure you're operating at maximum efficiency.



## Minimize the mess.

The top loading housing on PF4 filter assemblies provide easy and clean access when servicing or changing the element. Accessing the element is as simple as removing the housing cover, meaning you have no heavy bowl to lift and can get back in operation quicker than ever.

## HF4 Compatible Design.

The PF4 series is engineered to meet mill and plant target cleanliness codes and required ISO4406:2021 cleanliness standards to meet hydraulic component manufacturers warranties. Available with HF4 compatible port to port dimension, mounting pattern, and element design to meet the automotive manufacturing standard.




## Works with your system.

Available with several port and length configurations, you'll be amazed at how easily the PF4 integrates directly into your system.


## Tailored to your needs.

PF4 assemblies come with an array of standard indicator options to allow you to customize your assemblies for your exact applications. From thermal lockouts to surge protection, your system will be prepared for whatever comes its way.

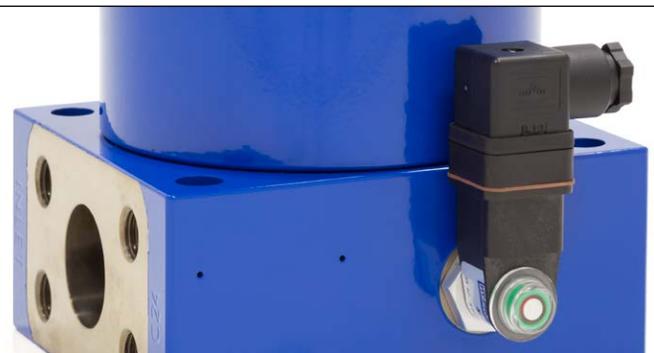

## Extend the life of your element.

Donaldson Hy-Pro's advanced filter media delivers lower operating ISO Codes to eliminate internally generated contamination. With the widest range of media options and the large surface area of PF4 elements, your filter will have an incredibly long service life to protect your sensitive components better than ever.

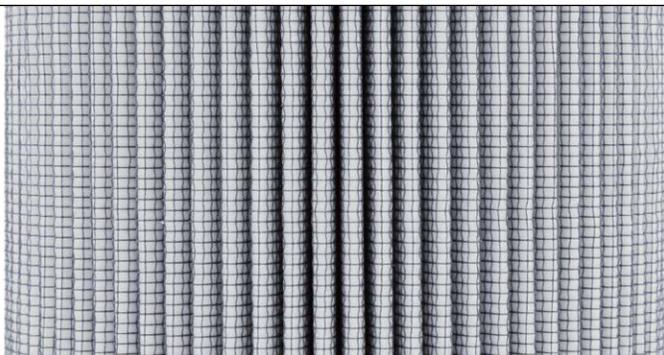

# PF4 Sizing Guidelines


## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.


$\Delta P$ Factors <sup>1</sup>	Collapse	Length	Units	Media						
				1M	3L	6L	12L	16L	25M	**W
PF4K**, PF4K1**, L9 PF4KC**			psid/gpm	0.2740	0.1208	0.0891	0.0674	0.0605	0.0691	0.0381
			bard/lpm	0.0050	0.0022	0.0016	0.0012	0.0011	0.0012	0.0006
		L18	psid/gpm	0.1500	0.0746	0.0591	0.0484	0.0450	0.0493	0.0340
			bard/lpm	0.0027	0.0014	0.0011	0.0009	0.0008	0.0009	0.0006
		L27	psid/gpm	0.1096	0.0596	0.0493	0.0422	0.0400	0.0428	0.0327
			bard/lpm	0.0020	0.0011	0.0009	0.0008	0.0007	0.0008	0.0006
		L36	psid/gpm	0.0867	0.0511	0.0437	0.0387	0.0371	0.0391	0.0319
			bard/lpm	0.0016	0.0093	0.0008	0.0007	0.0007	0.0007	0.0006

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula for viscosity change.


# PF4 Installation Drawings

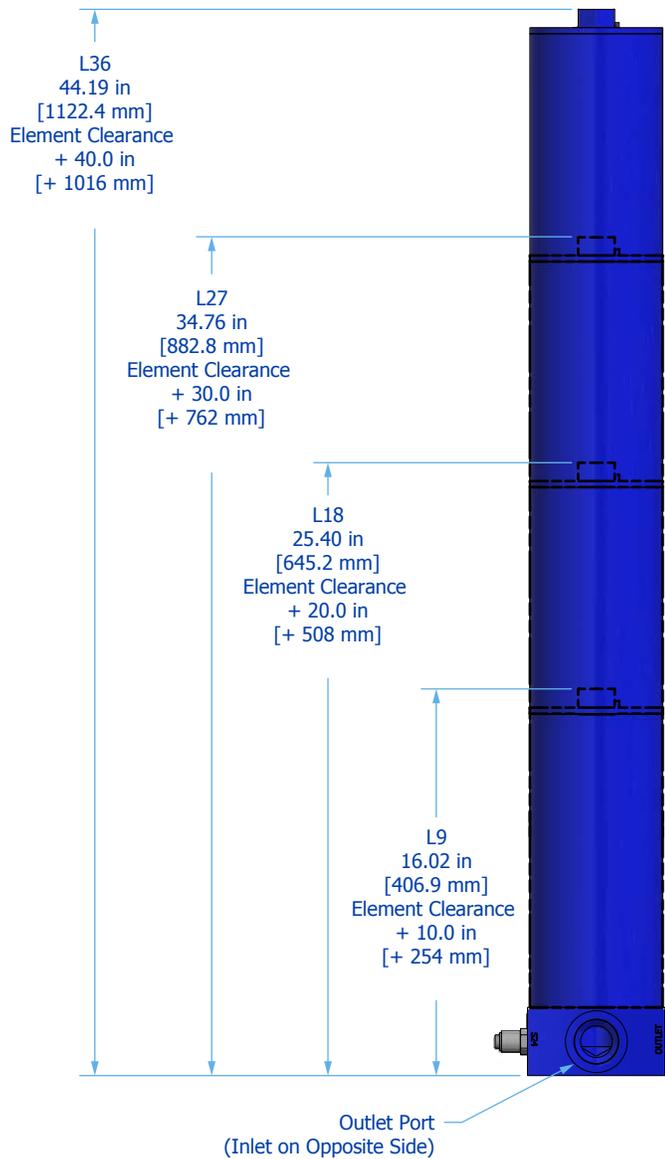


**Top View**

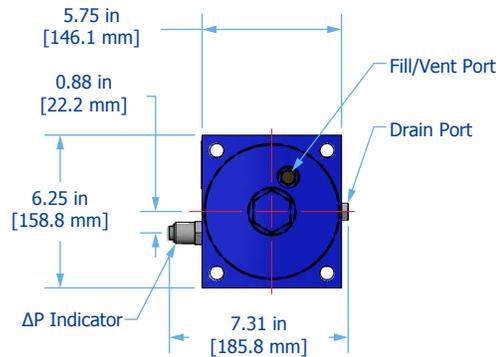

**Manifold Bottom View**  
(90 Durometer O-rings Supplied)

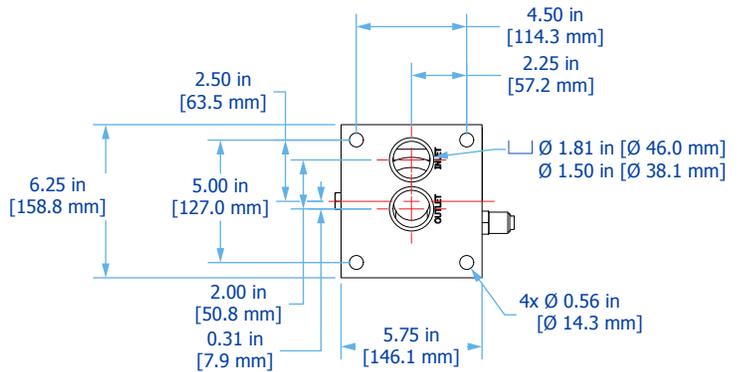

**Bottom View**

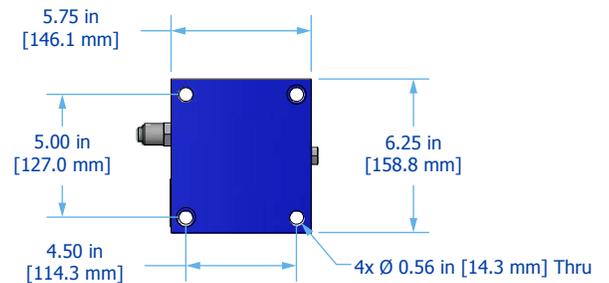


# PF4 Specifications

Dimensions	See Installation Drawings for model specific dimensions.			
Approximate Weight <sup>1</sup>	<b>PF4 L9</b> 56 lbs (25.4 kg)	<b>PF4 L18</b> 82 lbs (37.5 kg)	<b>PF4 L27</b> 109 lbs (49.5 kg)	<b>PF4 L36</b> 135 lbs (61.3 kg)
Operating Temperature	-20°F to 250°F (-29°C to 121°C)			
Operating Pressure	6,000 psi (414 bar) max code 62 port only 5,500 psi (379 bar) max all other ports			
Flow Fatigue Rating	3,500 psi (238 bar)			
Burst Pressure	16,400 psi (1130 bar)			
ΔP Indicator Trigger	70 psid (4.8 bard) for both bypass and non-bypass Refer to Appendix for indicator wiring diagrams			
Element Collapse Rating	<b>HPK</b> 290 psid (20.0 bard)	<b>HPK3</b> 3000 psid (206.8 bard)	<b>HPK5</b> 5000 psid (344.7 bard)	<b>HPKC</b> 150 psid (10.3 bard)
Integral Bypass Setting	90 psid (6.2 bard)			
Materials of Construction	<b>Head/Lid</b> Ductile iron (powder coated)	<b>Bowl</b> Seamless steel tubing (powder coated)	<b>Assembly Bypass Valve</b> Delrin	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$	
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number: <b>Filter Element Part Number</b> HP[Collapse Rating Code]L[Length Code] – [Media Selection Code] [Seal Code]			<b>Example</b> HPKL18–16MV
Fluid Compatibility	Petroleum and mineral based fluids (standard). For polyol ester, phosphate ester, and other specified synthetic fluids use fluorocarbon seal option or contact factory.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# PF4 Part Number Builder



<b>Connection</b>	<b>Port Option</b>	<b>Max Flow Rate</b>	<b>Max Pressure Rate</b>	
	<b>C24</b> 1.5" Code 62 flange	150 gpm (568 lpm) <sup>1</sup>	6000 psi (414 bar)	
	<b>F24</b> 1.5" Code 61 flange	150 gpm (568 lpm) <sup>1</sup>	5500 psi (379 bar)	
	<b>G24</b> 1.5" GThread (BSPP)	150 gpm (568 lpm) <sup>1</sup>	5500 psi (379 bar)	
	<b>M24</b> Manifold mount (see installation detail)	150 gpm (568 lpm) <sup>1</sup>	5500 psi (379 bar)	
	<b>S24</b> 1.5" SAE	150 gpm (568 lpm) <sup>1</sup>	5500 psi (379 bar)	
<b>Collapse Rating</b>	<b>K</b>	290 psid (20.0 bard), HF4 element configuration		
	<b>K3</b>	3000 psid (206.8 bard), HF4 element configuration		
	<b>K5</b>	5000 psid (344.7 bard), HF4 element configuration		
	<b>KC</b>	150 psid (10.3 bard), Coreless with o-ring seals		
<b>Element Length</b>	<b>9</b>	9" (23 cm) nominal length filter element and housing		
	<b>18</b>	18" (46 cm) nominal length filter element and housing		
	<b>27</b>	27" (69 cm) nominal length filter element and housing		
	<b>36</b>	36" (91 cm) nominal length filter element and housing		
<b>Bypass</b>	<b>3</b>	50 psid (3.4 bard) bypass		
	<b>6</b>	90 psid (6.2 bard) bypass		
	<b>X<sup>2</sup></b>	No bypass		
<b>ΔP Indicator</b>	<b>Indicator Options</b>	<b>Thermal Lockout</b>	<b>Surge Control</b>	<b>Reset</b>
	<b>D</b> Visual / Electrical (DIN 43650)	No	No	Auto
	<b>S</b> Visual / Electrical (DIN 43650)	Yes	Yes	Manual
	<b>V</b> Visual	No	No	Auto
	<b>X</b> No indicator (port plugged)	-	-	-
<b>Y</b> Visual only	Yes	Yes	Manual	
<b>Special Options</b>	<b>C</b>	Reverse flow check valve		
	<b>N</b>	Nickel plated internal components for high water applications (not available with Special Option C)		
<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>	
	<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b>	$\beta_{4(c)} \geq 4000$
	<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b>	$\beta_{6(c)} \geq 4000$
	<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>12A</b>	$\beta_{11(c)} \geq 4000$
	<b>12M</b>	$\beta_{11(c)} \geq 4000$	<b>25A</b>	$\beta_{22(c)} \geq 4000$
	<b>16M</b>	$\beta_{16(c)} \geq 4000$		
	<b>25M</b>	$\beta_{22(c)} \geq 4000$		
	<b>Dynafuzz stainless fiber</b>		<b>Stainless wire mesh</b>	
	<b>3SF</b>	$\beta_{4(c)} \geq 4000$	<b>10W</b>	10 $\mu$ nominal
	<b>6SF</b>	$\beta_{6(c)} \geq 4000$	<b>25W</b>	25 $\mu$ nominal
<b>10SF</b>	$\beta_{11(c)} \geq 4000$	<b>40W</b>	40 $\mu$ nominal	
<b>25SF</b>	$\beta_{22(c)} \geq 4000$	<b>74W</b>	74 $\mu$ nominal	
		<b>149W</b>	149 $\mu$ nominal	
<b>Seals</b>	<b>B</b>	Nitrile (Buna)		
	<b>V</b>	Fluorocarbon		
	<b>E-WS</b>	EPR seals + stainless steel support mesh		

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>K3 or K5 series elements only

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PFH

## High Pressure In-Line Filter Assemblies

Donaldson Hy-Pro's PFH14, PFH55, and PFH167 pressure filters are designed to protect sensitive components in hydraulic circuits. Install the series upstream of specific components or directly after the pressure pump in smaller systems to minimize risk of failure and costly system downtime.

Ideal for use as a power unit pump discharge filter or a pilot filter, and to protect components that are sensitive to particulate contamination and require clean pressurized fluid for reliable operation, such as servo valves.

**Max Flow Rate: 95 gpm (360 lpm)**

**Max Operating Pressure: 6090 psi (420 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Dynamic Filter Efficiency

Hydraulic applications see dynamic flow changes on a regular basis. Dynamic Filter Efficiency testing takes the ISO16889 Multi-Pass testing even further with variable flow shifts to ensure your filter elements stand up to real world conditions and maintain the highest capture and retention rates in the industry.



221



## Industrial duty.

Standard mounting holes for optional brackets, aluminum ID tags, a variety of indicator options, and standard drain ports make the PFH the ideal choice for heavy duty hydraulic filtration.

## Unique applications.

With available nickel plating, the PFH14, PFH55 and PFH167 are ideal choices for rough duty, high water contamination applications. Media options include wire mesh, water removal, and Dualglass to address even the most unique contamination. A reverse flow check valve option enables usage in reversing hydrostatic drive systems.




## Minimize the mess.

The PFH series comes standard with bowl drains to minimize mess during servicing. The circumferential o-ring bowl seal eliminates leaking and weeping.

## Extend the life of your element.

Unique internal flow paths provide low resistance to flow, resulting in a low housing pressure drop. Donaldson Hy-Pro's advanced filter media delivers lower operating ISO Codes to eliminate internally generated contamination meaning your filter will have an incredibly long service life to protect your sensitive components better than ever.

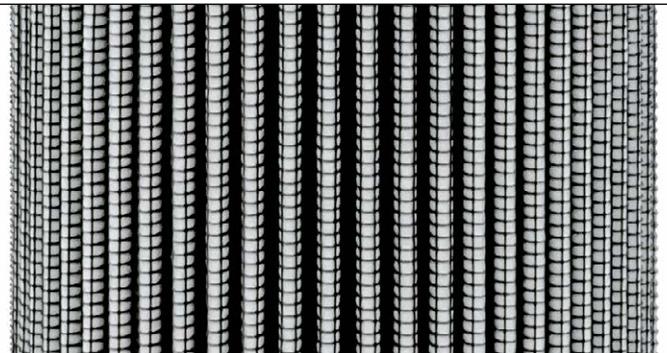

## The ideal choice for hydraulics.

Use the PFH as the main high pressure filter(s) in a hydraulic system or upstream of sensitive components as a pilot filter to protect your valves and actuators. The PFH series is engineered to provide lower operating ISO Codes than what is required for compliance with hydraulic component manufacturers' warranties.

# PFH Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.


## $\Delta P$ Factors<sup>1</sup>

Series	Length	Units	Media						
			1M	3M	6M	10M	16M	25M	**W
PFH14	L3	psid/gpm	2.709	2.286	1.772	1.589	1.555	1.497	0.270
		bard/lpm	0.049	0.042	0.032	0.029	0.028	0.027	0.005
	L5	psid/gpm	2.071	1.748	1.355	1.215	1.189	1.145	0.206
bard/lpm		0.038	0.032	0.025	0.022	0.022	0.021	0.004	
L9	psid/gpm	1.075	0.907	0.703	0.630	0.617	0.594	0.107	
	bard/lpm	0.020	0.017	0.013	0.011	0.011	0.011	0.002	
PFH55	L5	psid/gpm	0.944	0.797	0.617	0.554	0.542	0.522	0.094
		bard/lpm	0.017	0.015	0.011	0.010	0.010	0.010	0.002
L9	psid/gpm	0.580	0.497	0.423	0.383	0.374	0.368	0.066	
	bard/lpm	0.011	0.009	0.008	0.007	0.007	0.007	0.001	
PFH167	L6	psid/gpm	0.536	0.452	0.350	0.314	0.308	0.296	0.053
		bard/lpm	0.010	0.008	0.006	0.006	0.006	0.005	0.001
	L10	psid/gpm	0.326	0.275	0.213	0.191	0.187	0.180	0.032
bard/lpm		0.006	0.005	0.004	0.003	0.003	0.003	0.001	
L15	psid/gpm	0.205	0.200	0.155	0.139	0.136	0.131	0.024	
	bard/lpm	0.004	0.004	0.003	0.003	0.002	0.002	0.000	


<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on page 22 for viscosity change.

# PFH Installation Drawings


## PFH14 Installation Drawing

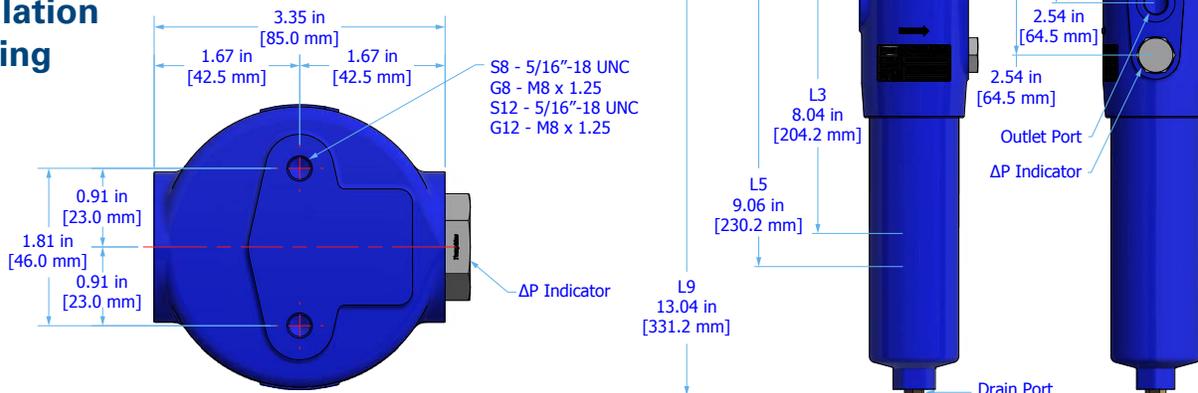

## PFH55 Installation Drawing

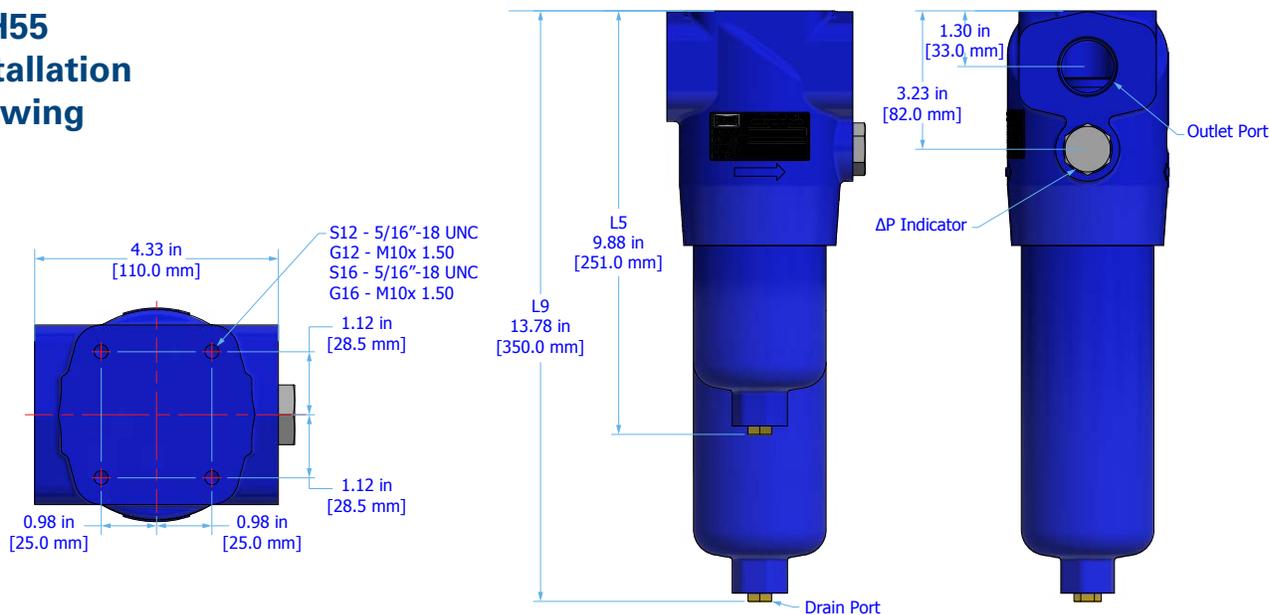

## PFH167 Installation Drawing

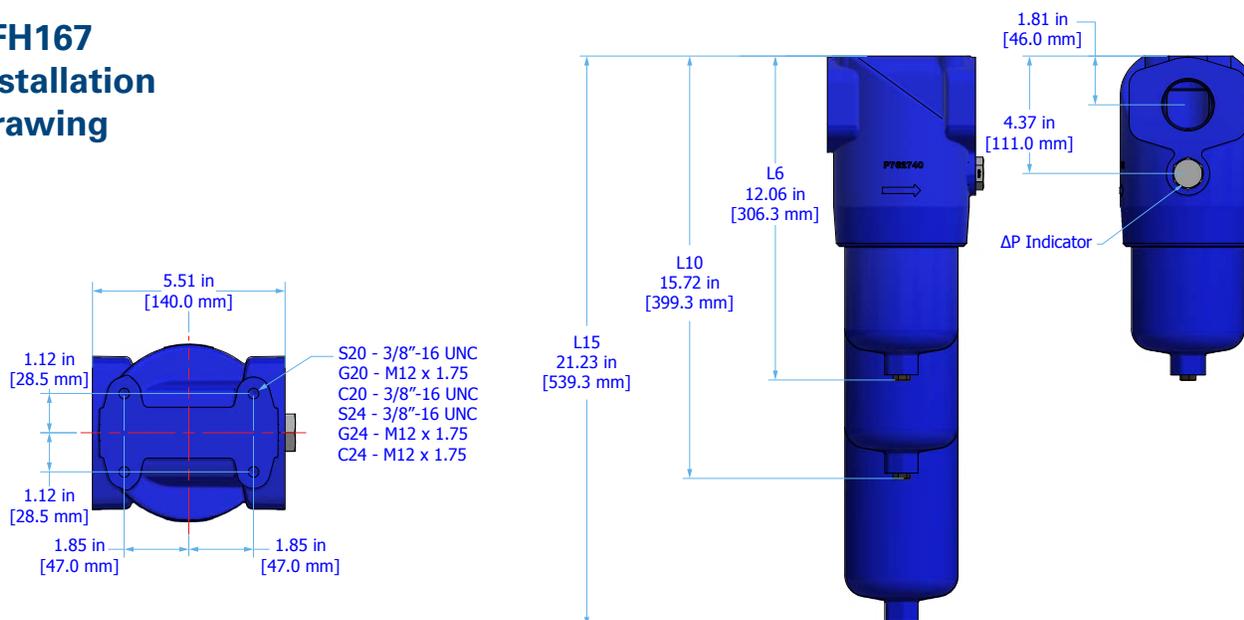

Bowl Torque 37 ft-lbs [50N-m]

# PFH Specifications

Dimensions	See Installation Drawings or model specific dimensions.			
Approximate Weight <sup>1</sup>	<b>PFH14</b> L3: 7.9 lbs (3.6 kg) L5: 9.2 lb (4.2 kg) L9: 13.2 lb (6.0 kg)	<b>PFH55</b> L5: 14.5 lb (6.6 kg) L9: 18.2 lb (8.3 kg)	<b>PFH167</b> L6: 34.6 lb (15.7 kg) L10: 39.2 lb (17.8 kg) L15: 43.9 lb (19.9 kg)	
Operating Temperature	-20°F to 250°F (-29°C to 121°C)			
Operating Pressure	<b>PFH14</b> 6090 psi (420 bar) max	<b>PFH55</b> 6090 psi (420 bar) max	<b>PFH167</b> 6090 psi (420 bar) max	
Burst Pressure	<b>PFH14</b> > 11,600 psi (800 bar)	<b>PFH55</b> > 11,600 psi (800 bar)	<b>PFH167</b> > 11,600 psi (800 bar)	
Flow Fatigue Rating	<b>PFH14</b> 2,000,000 cycles at 0-300 bar per NFPA T3.10.5.1, R2 2000	<b>PFH55</b> 2,000,000 cycles at 0-300 bar per NFPA T3.10.5.1, R2 2000	<b>PFH167</b> 2,000,000 cycles at 0-300 bar per NFPA T3.10.5.1, R2 2000	
ΔP Indicator Trigger	73 psid (5 bard)			
Element Collapse Rating	<b>HP***N</b> 450 psid (31.0 bard) max	<b>HP***H</b> 3000 psid (206.8 bard) max		
Integral Bypass Setting	<b>PFH14</b> 90 psid (6.2 bard)	<b>PFH55</b> 90 psid (6.2 bard)	<b>PFH167</b> 90 psid (6.2 bard)	
Materials of Construction	<b>Head</b> Spheroidal "cast iron"	<b>Bowl</b> Cold extruded steel	<b>Exterior Coating</b> Powder coated	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x(c)} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x(c)} \geq 4000$	<b>SF</b> Dynafuzz stainless steel fiber media $\beta_{x(c)} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x(c)} \geq 2$
Replacement Elements	To determine replacement elements, use the selected codes from the following page below:			
	<b>Series Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>	
	14	HP53[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP53HL5-10MB	
	55	HP152[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP152NL9-16MV	
	167	HP419[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP419NL15-3AB	
Fluid Compatibility	Biodegradable and mineral based fluids. For high water based or specified synthetics consult factory.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# PFH Part Number Builder

**PFH**

Series      Connection      Element Type      Collapse      Length      Bypass      ΔP Indicator      Special Options      Media      Seal

<b>Series</b>	<b>14</b>	Nominal flow rate up to 15 gpm (57 lpm) <sup>1</sup>
	<b>55</b>	Nominal flow rate up to 35 gpm (132 lpm) <sup>1</sup>
	<b>167</b>	Nominal flow rate up to 95 gpm (360 lpm) <sup>1</sup>

<b>Connection</b>	<b>PFH14</b>	<b>PFH55</b>	<b>PFH167</b>	
	<b>G12</b>	¾" G thread (BSPP)	<b>C16</b>	1" Code 62 flange (6000 psi)
	<b>S8</b>	½" SAE	<b>G12</b>	¾" G thread (BSPP)
	<b>S12</b>	¾" SAE	<b>G16</b>	1" G thread (BSPP)
			<b>S12</b>	¾" SAE
		<b>S16</b>	1" SAE	
			<b>C20</b>	1.25" Code 62 flange (6000 psi)
			<b>C24</b>	1.5" Code 62 flange (6000 psi)
			<b>G20</b>	1.25" G thread (BSPP)
			<b>G24</b>	1.5" G thread (BSPP)
			<b>S20</b>	1.25" SAE
			<b>S24</b>	1.5" SAE

<b>Element Type</b>	<b>PFH14</b>	<b>PFH55</b>	<b>PFH167</b>	
	<b>53</b>	HP53 filter element	<b>152</b>	HP152 filter element
			<b>419</b>	HP419 DIN standard filter element

<b>Collapse Rating</b>	<b>H</b>	3000 psid (206.8 bard) – High collapse element with no housing bypass
	<b>N</b>	450 psid (31.2 bard) – Core-in element with housing bypass

<b>Length</b>	<b>PFH14</b>	<b>PFH55</b>	<b>PFH167</b>	
	<b>3</b>	3" (10 cm) nominal element	<b>3</b>	3" (7 cm) nominal element
	<b>5</b>	5" (13 cm) nominal element	<b>5</b>	5" (13 cm) nominal element
	<b>9</b>	9" (23 cm) nominal element	<b>9</b>	9" (23 cm) nominal element
			<b>6</b>	6" (15 cm) nominal element
		<b>10</b>	10" (25 cm) nominal element	
		<b>15</b>	15" (38 cm) nominal element	

<b>Bypass</b>	<b>6</b>	90 psid (6.2 bard) bypass
	<b>X<sup>2</sup></b>	No bypass

<b>ΔP Indicator</b>	<b>Indicator Options</b>	<b>Thermal Lockout</b>	<b>Surge Control</b>	<b>Reset</b>	
	<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
	<b>DX</b>	Electrical switch only (DIN 43650)	No	No	Auto
	<b>T</b>	Visual / Electrical (DIN 43650)	Yes	No	Manual
	<b>V</b>	Visual	No	No	Auto
	<b>X</b>	No indicator (port plugged)	–	–	–

<b>Special Options</b>	<b>C<sup>3</sup></b>	Reverse flow check valve
	<b>M2</b>	Mounting bracket
	<b>N<sup>4</sup></b>	Nickel plated internal components for high water applications (non-bypass only)

<b>Media Selection</b>	<b>G8 Dualglass</b>	<b>G8 Dualglass + water removal</b>		
	<b>1M</b>	β <sub>3</sub> (c) ≥ 4000	<b>3A</b>	β <sub>4</sub> (c) ≥ 4000
	<b>3M</b>	β <sub>4</sub> (c) ≥ 4000	<b>6A</b>	β <sub>6</sub> (c) ≥ 4000
	<b>6M</b>	β <sub>6</sub> (c) ≥ 4000	<b>10A</b>	β <sub>11</sub> (c) ≥ 4000
	<b>10M</b>	β <sub>11</sub> (c) ≥ 4000	<b>25A</b>	β <sub>22</sub> (c) ≥ 4000
	<b>16M</b>	β <sub>16</sub> (c) ≥ 4000		
	<b>25M</b>	β <sub>22</sub> (c) ≥ 4000		

<b>Dynafuzz stainless fiber</b>	<b>Stainless wire mesh</b>	
<b>3SF</b>	β <sub>4</sub> (c) ≥ 4000	
<b>6SF</b>	β <sub>6</sub> (c) ≥ 4000	
<b>10SF</b>	β <sub>11</sub> (c) ≥ 4000	
<b>25SF</b>	β <sub>22</sub> (c) ≥ 4000	
	<b>25W</b>	25μ nominal
	<b>40W</b>	40μ nominal
	<b>74W</b>	74μ nominal
	<b>149W</b>	149μ nominal

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V<sup>3</sup></b>	Fluorocarbon
	<b>E-WS<sup>3</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.  
<sup>2</sup>Only available when paired with "H" high collapse element.  
<sup>3</sup>Must be paired with Bypass option "6". Not compatible with Special Option "N".  
<sup>4</sup>When selected, automatically adds nickel plating to filter element. For replacement elements, add "-N" to end of filter element part number. Not available on PFH840 series.  
 For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PFH62

## High Pressure In-Line Filter Assemblies

Donaldson Hy-Pro's PFH62 pressure filters are designed to protect sensitive components in hydraulic circuits. Install the series upstream of specific components or directly after the pressure pump to minimize risk of failure and costly system downtime.

Ideal for use as a power unit pump discharge filter and to protect components that are sensitive to particulate contamination and require clean pressurized fluid for reliable operation, such as servo valves.

**Max Flow Rate: 150 gpm (568 lpm)**

**Max Operating Pressure: 6,600 psi (455 bar)**

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Dynamic Filter Efficiency


Hydraulic applications see dynamic flow changes on a regular basis. Dynamic Filter Efficiency testing takes the ISO16889 Multi-Pass testing even further with variable flow shifts to ensure your filter elements stand up to real world conditions and maintain the highest capture and retention rates in the industry.



227

## Unique applications.

With available nickel plating, the PFH62 is an ideal choice for rough duty, high water contamination applications. Media options include wire mesh, water removal, and Dualglass to address even the most unique contamination. A reverse flow check valve option enables usage in reversing hydrostatic drive systems.

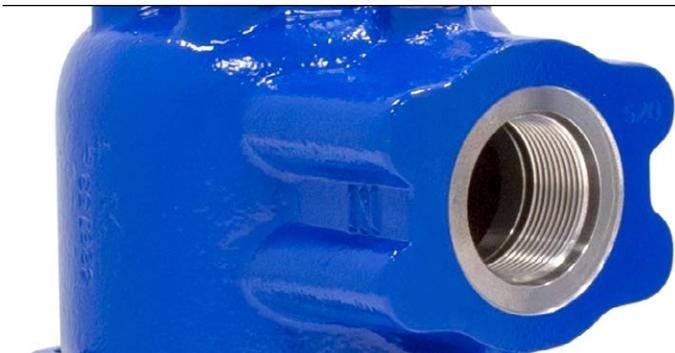

## Industrial duty.

Standard mounting holes for an optional mounting bracket, a variety of indicator options, head-up or inverted mounting options, and side-in / end-out "L-Head" port orientation or a sub-plate manifold mount option make the PFH62 the ideal choice for heavy duty hydraulic filtration.




## Minimize the mess.

The top loading housing on PFH62 filter assemblies provide easy and clean access when servicing or changing the element. Accessing the element is as simple as removing the housing cover, meaning you have no heavy bowl to lift and can get back in operation quicker than ever.



## Extend the life of your element.

Unique internal flow paths provide low resistance to flow, resulting in a low housing pressure drop. Donaldson Hy-Pro's advanced filter media delivers lower operating ISO Codes to eliminate internally generated contamination meaning your filter will have an incredibly long service life to protect your sensitive components better than ever.

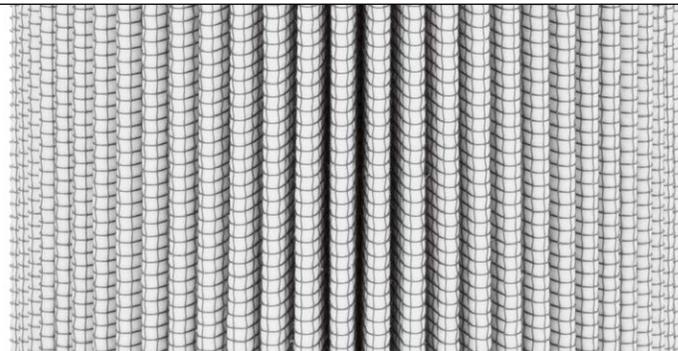

## The ideal choice for hydraulics.

Use the PFH62 as the main high pressure filter(s) in a hydraulic system or upstream of sensitive components as a pilot filter to protect your valves and actuators. The PFH series is engineered to provide lower operating ISO Codes than what is required for compliance with hydraulic component manufacturers' warranties.



# PFH62 Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.


## $\Delta P$ Factors<sup>1</sup>

Element Type	Length	Units	Media							**W
			1M	3M	6M	10M	16M	25M		
60	L8	psid/gpm	0.378	0.319	0.247	0.221	0.217	0.209	0.038	
		bard/lpm	0.007	0.006	0.004	0.004	0.004	0.004	0.001	
	L13	psid/gpm	0.237	0.200	0.155	0.139	0.136	0.131	0.024	
		bard/lpm	0.004	0.004	0.003	0.003	0.002	0.002	0.000	
	L16	psid/gpm	0.181	0.153	0.118	0.106	0.104	0.100	0.018	
		bard/lpm	0.003	0.003	0.002	0.002	0.002	0.002	0.000	
61	L8	psid/gpm	0.488	0.412	0.319	0.286	0.280	0.270	0.049	
		bard/lpm	0.009	0.008	0.006	0.005	0.005	0.005	0.001	
	L13	psid/gpm	0.307	0.259	0.201	0.180	0.176	0.170	0.031	
		bard/lpm	0.006	0.005	0.004	0.003	0.003	0.003	0.001	
	L16	psid/gpm	0.161	0.136	0.105	0.095	0.093	0.089	0.016	
		bard/lpm	0.003	0.002	0.002	0.002	0.002	0.002	0.000	


<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula.

# PFH62 Installation Drawings

## PFH62 Installation Drawing

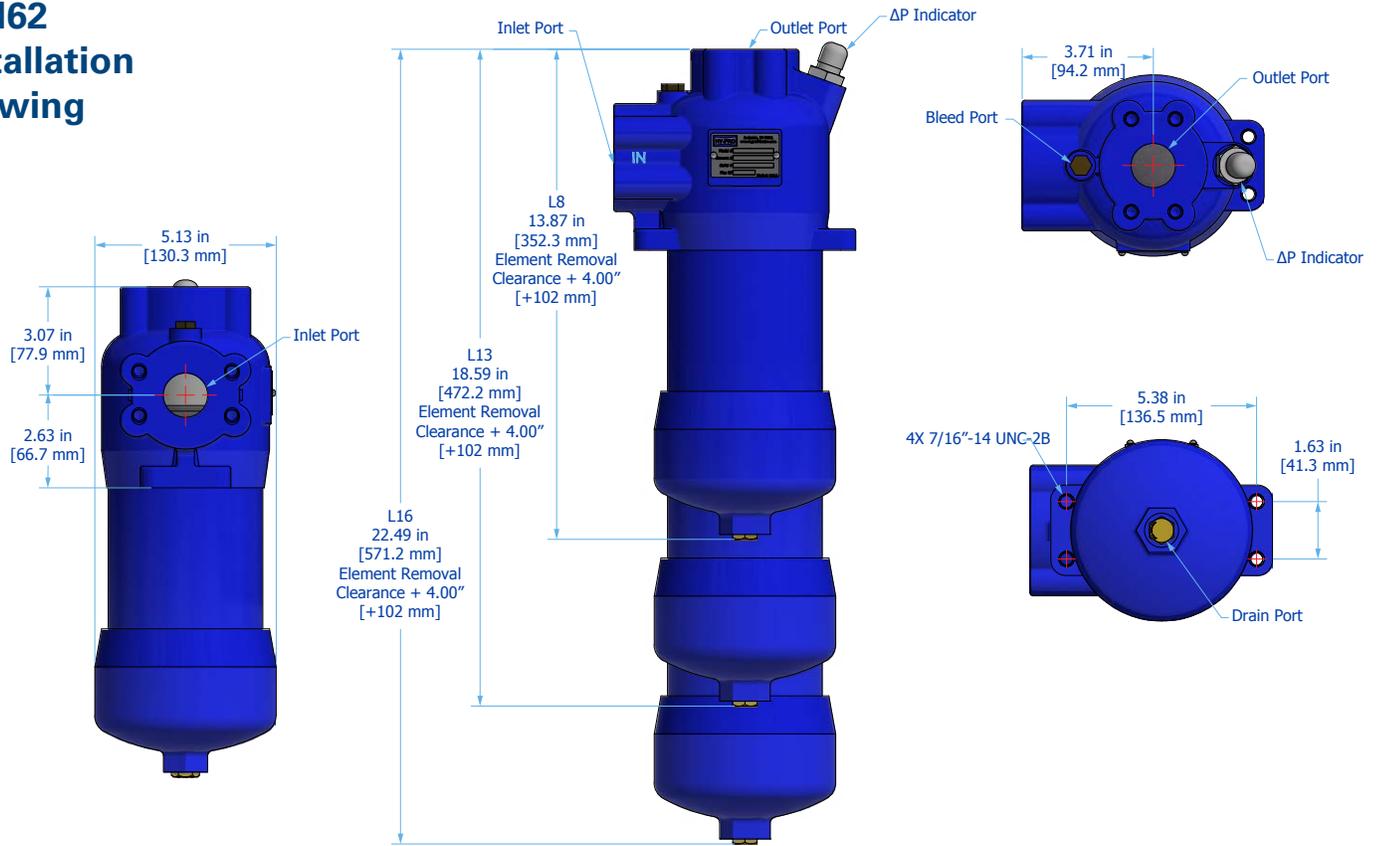

## PFH62M Installation Drawing

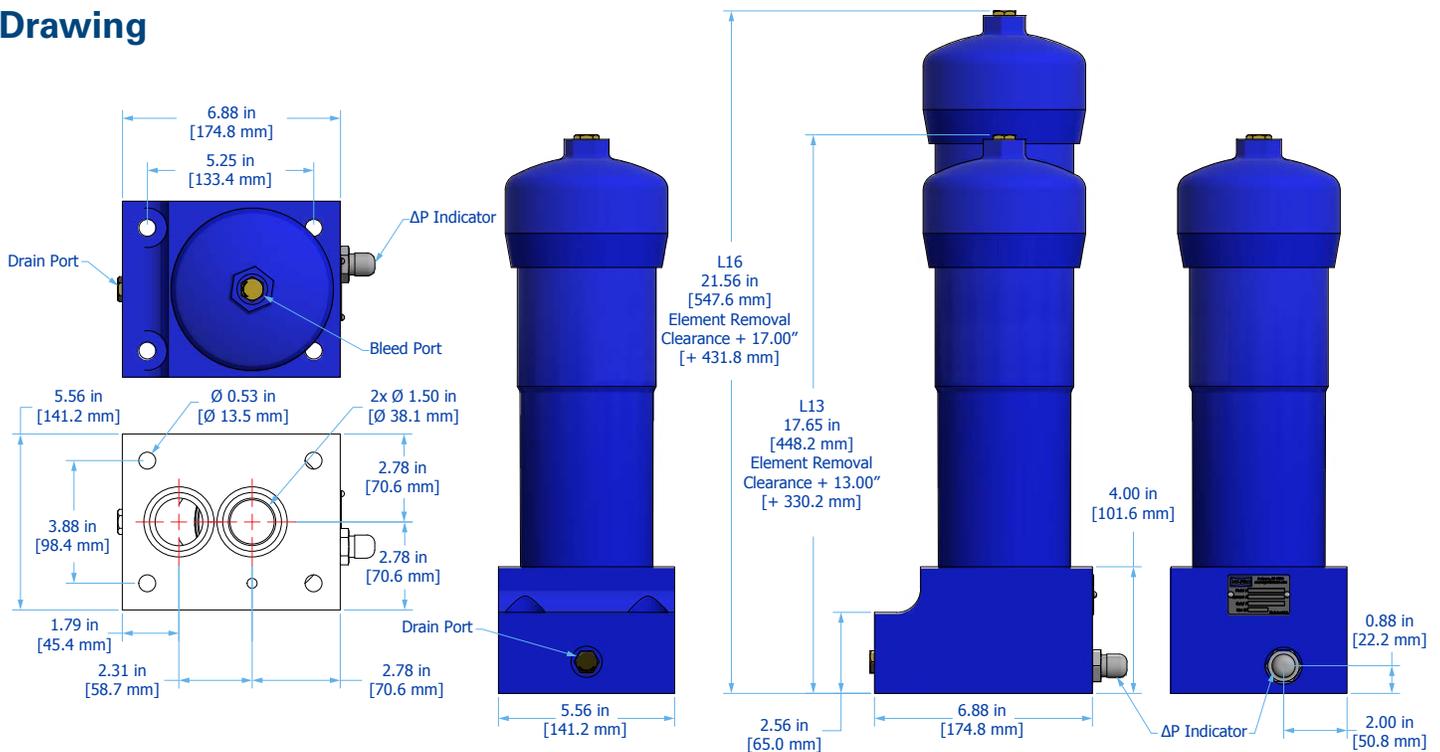


# PFH62 Specifications

Dimensions	See Installation Drawings for model specific dimensions.			
Approximate Weight <sup>1</sup>	<b>PFH62 L8</b> 33 lbs(15 kg)	<b>PFH62 L13</b> 42 lbs(19 kg)	<b>PFH62 L16</b> 48 lbs(21.8 kg)	
Operating Temperature	-20°F to 250°F (-29°C to 121°C)			
Operating Pressure	6,600 psi (455 bar) max			
Burst Pressure	19,900 psi (1,372 bar) max			
Flow Fatigue Rating	2000 cycles at 0-300 bar per NFPAT3.10.5.1, R2 2000			
ΔP Indicator Trigger	73 psid (5 bard)			
Element Collapse Rating	<b>HP60</b> 290 psid (20 bard) max	<b>HP61</b> 3000 psid (206.8 bard) max	<b>HP964</b> 150 psid (20 bard) max	
Integral Bypass Setting	90 psid (6.2 bard)			
Materials of Construction	<b>Head + Cover</b> Ductile iron	<b>Bowl</b> Seamless steel tubing	<b>Exterior Coating</b> Powder coated	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(C)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(C)}} \geq 4000$	<b>SF</b> Dynafluff stainless steel fiber media $\beta_{x_{(C)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(C)}} \geq 2$
Replacement Elements	To determine replacement elements, use the selected codes from the following page below: <b>Filter Element Part Number</b> HP[Element Type Code] L [Length Code] – [Media Selection Code][Seal Code]			<b>Example</b> HP61L8-2MB
Fluid Compatibility	Biodegradable and mineral based fluids. For high water based or specified synthetics consult factory.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# PFH62 Part Number Builder

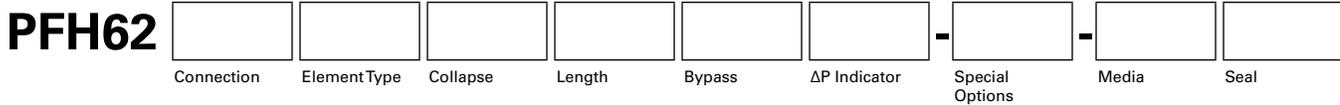

Connection	Port Option	Max Flow Rate
<b>C20</b>	1.25" Code 62 flange (6000 psi)	100 gpm (379 lpm)
<b>F20</b>	1.25" Code 61 flange	100 gpm (379 lpm)
<b>F24</b>	1.5" Code 61 flange	150 gpm (568 lpm)
<b>G20</b>	1.25" G thread (BSPP)	100 gpm (379 lpm)
<b>M24</b>	Manifold mount (see installation detail)	150 gpm (568 lpm)
<b>S16</b>	SAE - 16 Thread	100 gpm (379 lpm)
<b>S20</b>	1.25" SAE	125 gpm (473 lpm)
<b>S24</b>	1.5" SAE	

Element Type	Port Option
<b>60<sup>1</sup></b>	290 psid (20 bard) cored filter element (HF3 compatible)
<b>61</b>	3000 psid (207 bard) cored filter element (HF3 compatible)
<b>964</b>	Coreless filter element

Element Length	Port Option
<b>8</b>	8" (20 cm) nominal element
<b>13</b>	13" (33 cm) nominal element
<b>16</b>	16" (40 cm) nominal element

Bypass	Port Option
<b>6</b>	90 psid (6.2 bard) bypass
<b>X<sup>2</sup></b>	No bypass

ΔP Indicator	Indicator Options	Thermal Lockout	Surge Control	Reset
<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
<b>S</b>	Visual / Electrical (DIN 43650)	Yes	Yes	Manual
<b>V</b>	Visual	No	No	Auto
<b>X</b>	No indicator (port plugged)	-	-	-
<b>Y</b>	Visual	Yes	Yes	Manual

Special Options	Port Option
<b>C</b>	Reverse flow check valve
<b>M2</b>	Mounting bracket
<b>M3</b>	3/4" manifold bolts (Requires connection M24)

Media Selection	G8 Dualglass	G8 Dualglass + water removal
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A<sup>4</sup></b> $\beta_{4(c)} \geq 4000$
<b>2M<sup>3</sup></b>	$\beta_{4(c)} \geq 4000$	<b>6A<sup>4</sup></b> $\beta_{6(c)} \geq 4000$
<b>3M<sup>4</sup></b>	$\beta_{4(c)} \geq 4000$	<b>12A<sup>4</sup></b> $\beta_{11(c)} \geq 4000$
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>25A<sup>4</sup></b> $\beta_{22(c)} \geq 4000$
<b>12M<sup>4</sup></b>	$\beta_{11(c)} \geq 4000$	
<b>15M<sup>3</sup></b>	$\beta_{11(c)} \geq 4000$	
<b>16M</b>	$\beta_{16(c)} \geq 4000$	
<b>25M</b>	$\beta_{22(c)} \geq 4000$	

Media Selection	Dynafuzz stainless fiber	Stainless wire mesh
<b>3SF</b>	$\beta_{4(c)} \geq 4000$	<b>10W</b> 10μ nominal
<b>6SF</b>	$\beta_{6(c)} \geq 4000$	<b>25W</b> 25μ nominal
<b>10SF</b>	$\beta_{11(c)} \geq 4000$	<b>40W</b> 40μ nominal
<b>25SF</b>	$\beta_{22(c)} \geq 4000$	<b>74W</b> 74μ nominal
		<b>149W</b> 149μ nominal

Seals	Port Option
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-W</b>	EPR seals + stainless steel support mesh

<sup>1</sup>Requires Bypass option 6 selected.

<sup>2</sup>Only available when paired with "H" high collapse element.

<sup>3</sup>Compatible only with Element Type "61"; HP61L filter elements.

<sup>4</sup>Compatible only with Element Types "60"; HP60L filter elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PFH92

## High Pressure In-Line Filter Assemblies

Donaldson Hy-Pro's PFH92 pressure filters are designed to protect sensitive components in hydraulic circuits. Install the series upstream of specific components or directly after the pressure pump to minimize risk of system failure and costly downtime.

Ideal for use in all high pressure and high flow hydraulic applications.

**Max Flow Rate: 250 gpm (946 lpm)**

**Max Operating Pressure: 6,000 psi (414 bar)**

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Dynamic Filter Efficiency.

Hydraulic applications see dynamic flow changes on a regular basis. Dynamic Filter Efficiency testing takes the ISO16889 Multi-Pass testing even further with variable flow shifts to ensure your filter elements stand up to real world conditions and maintain the highest capture and retention rates in the industry.



## Industrial duty.

Standard code 62 port connections for high pressure applications. Mounting holes and bracket for head-up or inverted mounting options. Side-in / end-out "L-Head" port orientation make the PFH92 the ideal choice for heavy duty hydraulic filtration.



## You choose the element.

Choose between a cored or coreless style element. Housings for coreless elements use a permanent inner liner, making element servicing and disposal easier. For critical applications where unfiltered fluid can not reach critical components, we offer high collapse elements with up to a 3000 psi collapse rating. The choice is yours to make.



## Bypass and Reverse Flow Check Valve.

Donaldson Hy-Pro's PFH92 uses a unique bypass valve design that can be configured for a variety of bypass, reverse flow check, and filter element options. Whether you want a standard bypass and element or a non-bypass element with reverse flow check valve, we can customize a solution to fit your needs.



## Installation made easy.

With the optional mounting bracket, adding the PFH92 to your equipment just got easier. The mounting bracket provides a solid support mounted to the head that can be bolted to your equipment. The standard lifting hook allows the housing to easily be placed into position during installation.



## Minimize the mess.

The top loading housing on PFH92 filter assemblies provide easy and clean access when servicing or changing the element. Accessing the element is as simple as removing the housing cover, meaning there is no heavy bowl to remove. A hex nut on the cover makes servicing simple to minimize the downtime required to service the element.



# PFH92 Sizing Guide

## Filter Sizing<sup>1</sup>

Filter assembly clean element  $\Delta P$  after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.






## $\Delta P$ Factors<sup>1</sup>

Element Type	Length	Units	Media						
			1M	3M	6M	12M	16M	25M	**W
94	L13	psid/gpm	0.22560	0.15060	0.10909	0.08054	0.06887	0.06264	0.03797
		bard/lpm	0.00411	0.00274	0.00199	0.00147	0.00125	0.00114	0.00069
	L26	psid/gpm	0.12803	0.09073	0.07009	0.05589	0.05008	0.04699	0.03472
		bard/lpm	0.00233	0.00165	0.00128	0.00102	0.00091	0.00086	0.00063
	L39	psid/gpm	0.09550	0.07077	0.05708	0.04767	0.04382	0.04177	0.03363
		bard/lpm	0.00174	0.00129	0.00104	0.00087	0.00080	0.00076	0.00061
944	L13	psid/gpm	0.21663	0.14510	0.10550	0.07828	0.06714	0.06120	0.03767
		bard/lpm	0.00395	0.00264	0.00192	0.00143	0.00122	0.00111	0.00069
	L26	psid/gpm	0.11812	0.08465	0.06613	0.05339	0.04818	0.04540	0.03439
		bard/lpm	0.00215	0.00154	0.00120	0.00097	0.00088	0.00083	0.00063
	L39	psid/gpm	0.08742	0.06582	0.05385	0.04563	0.04227	0.04047	0.03337
		bard/lpm	0.00159	0.00120	0.00098	0.00083	0.00077	0.00074	0.00061
			<b>Media</b>						
			<b>1M</b>	<b>2M</b>	<b>6M</b>	<b>15M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
91	L13	psid/gpm	0.29551	0.19351	0.13703	0.09821	0.08233	0.07386	0.04031
		bard/lpm	0.00538	0.00352	0.00250	0.00179	0.00150	0.00135	0.00073
	L26	psid/gpm	0.16097	0.11095	0.08325	0.06421	0.05642	0.05227	0.03582
		bard/lpm	0.00293	0.00202	0.00152	0.00117	0.00103	0.00095	0.00065
	L39	psid/gpm	0.11734	0.08417	0.06581	0.05319	0.04803	0.04527	0.03436
		bard/lpm	0.00214	0.00153	0.00120	0.00097	0.00087	0.00082	0.00063

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula.

# PFH92 Installation Drawings

## PFH92 Installation Drawing

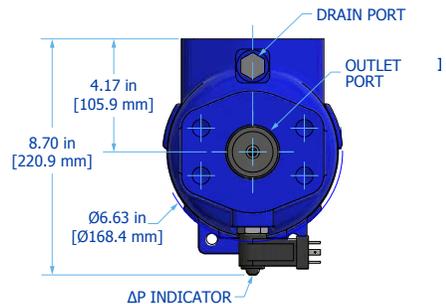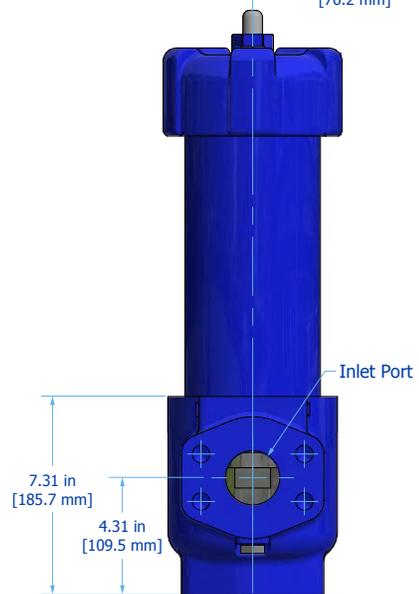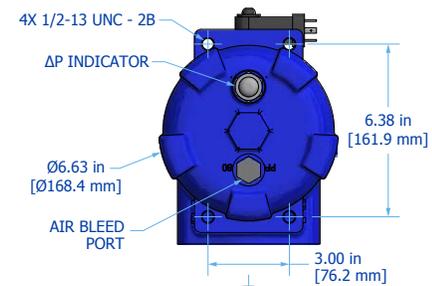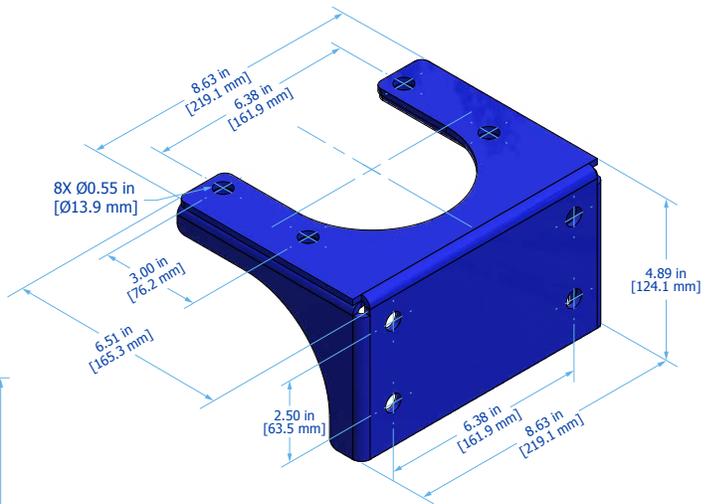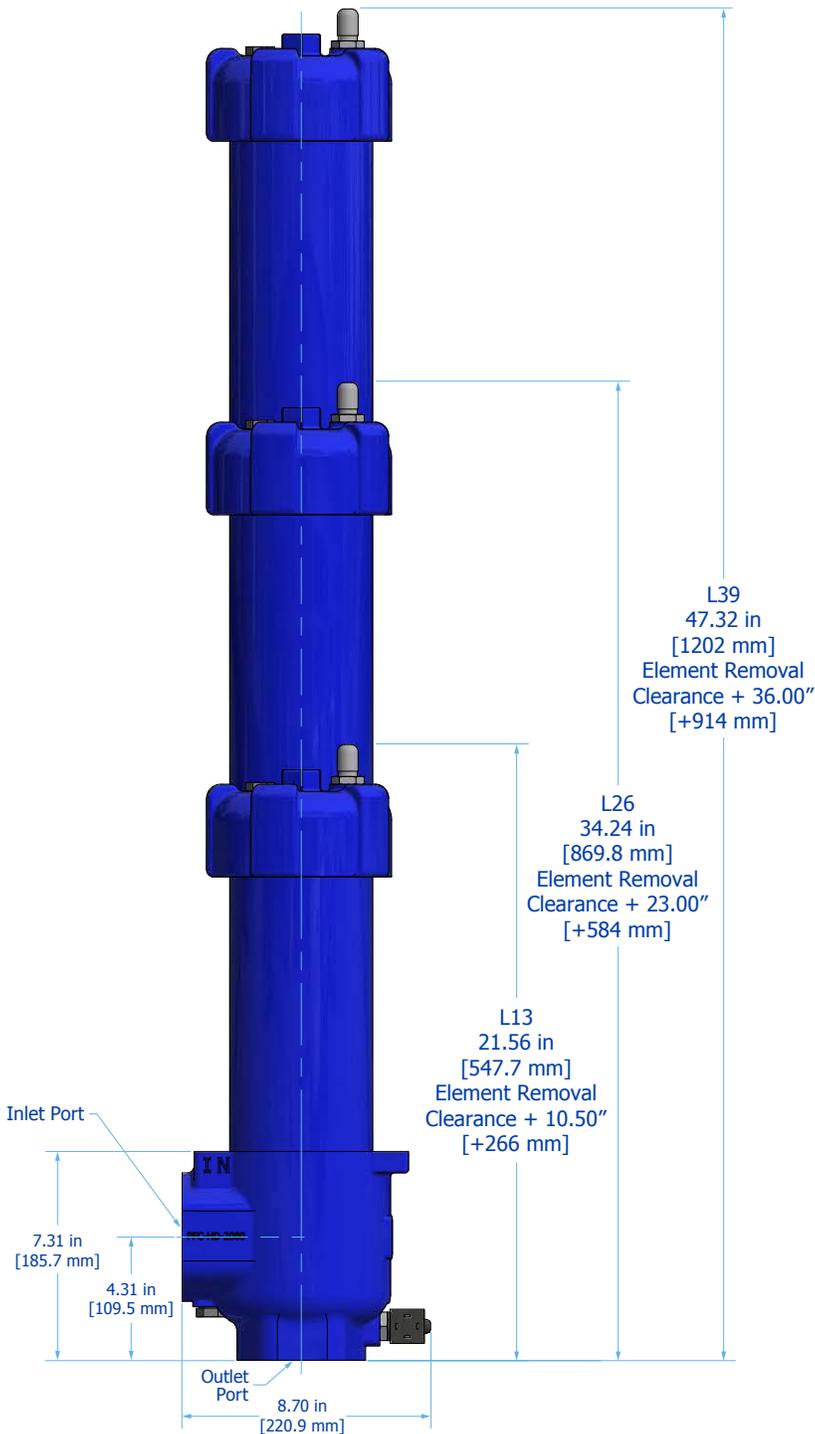


# PFH92 Specifications

Dimensions	See Installation Drawings for model specific dimensions.			
Approximate Weight <sup>1</sup>	<b>PFH92 L13</b> 92 lbs (41.7 kg)	<b>PFH92 L26</b> 127 lbs (57.6 kg)	<b>PFH92 L39</b> 152 lbs (68.9 kg)	
Operating Temperature	-20°F to 250°F (-29°C to 121°C)			
Operating Pressure	6,000 psi (415 bar) max			
Burst Pressure	17,300 psi (1,193 bar) max			
ΔP Indicator Trigger	70 psid (4.8 bar) for bypass 100 psid (6.9 bar) for non-bypass			
Element Collapse Rating	<b>HP94</b> 290 psid (20.0 bar) max	<b>HP91</b> 3000 psid (206.8 bar) max	<b>HP944</b> 150 psid (10.3 bar) max	
Integral Bypass Setting	90 psid (6.2 bar)			
Materials of Construction	<b>Head + Cover</b> Ductile iron	<b>Bowl</b> Seamless steel tubing	<b>Exterior Coating</b> Powder coated	
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{Cl}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{Cl}} \geq 4000$	<b>SF</b> Dynafuzz stainless steel fiber media $\beta_{x_{Cl}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{Cl}} \geq 2$
Replacement Elements	To determine replacement elements, use the selected codes from the following page below: <b>Filter Element Part Number</b> HP[Element Type Code] L [Length Code] – [Media Selection Code][Seal Code]			<b>Example</b> HP91L13-2MB HP94L26-6MB HP944L39-25MB
Fluid Compatibility	Biodegradable and mineral based fluids. For high water based or specified synthetics consult factory.			

<sup>1</sup>Dimensions & weights are approximations taken from base model and will vary according to options chosen.

# PFH92 Part Number Builder



Connection	Port Option	Max Flow Rate
<b>C24</b>	1.5" Code 62 flange (6000 psi)	175 gpm (662 lpm)
<b>C32</b>	2" Code 62 flange (6000 psi)	250 gpm (946 lpm)

Element Type	<b>94</b> <sup>1</sup> 290 psid (20.0 bard) cored filter element
<b>91</b> 3000 psid (206.8 bard) cored filter element	
<b>944</b> <sup>1</sup> 150 psid (10.3 bard) coreless filter element	

Element Length	<b>13</b> 13" (33 cm) nominal element
<b>26</b> 26" (66 cm) nominal element	
<b>39</b> 39" (99 cm) nominal element	

Bypass	<b>6</b> 90 psid (6.2 bar) bypass
<b>X</b> <sup>2</sup> No bypass	

ΔP Indicator	Indicator Options	Thermal Lockout	Surge Control	Reset
<b>D</b>	Visual / Electrical (DIN 43650)	No	No	Auto
<b>S</b>	Visual / Electrical (DIN 43650)	Yes	Yes	Manual
<b>V</b>	Visual/Mechanical	No	No	Auto
<b>X</b>	No indicator (port plugged)	-	-	-
<b>Y</b>	Visual only	Yes	Yes	Manual

Special Options	<b>C</b> Reverse flow check valve
<b>M2</b> Head mounting bracket	
<b>N</b> <sup>3</sup> Nickel plated for high water applications (non-bypass only)	

Media Selection	G8 Dualglass	G8 Dualglass + water removal
	<b>1M</b> $\beta_{3,  C } \geq 4000$ <b>2M</b> <sup>4</sup> $\beta_{4,  C } \geq 4000$ <b>3M</b> <sup>5</sup> $\beta_{4,  C } \geq 4000$ <b>6M</b> $\beta_{6,  C } \geq 4000$ <b>12M</b> <sup>5</sup> $\beta_{11,  C } \geq 4000$ <b>15M</b> <sup>4</sup> $\beta_{11,  C } \geq 4000$ <b>16M</b> $\beta_{16,  C } \geq 4000$ <b>25M</b> $\beta_{22,  C } \geq 4000$	<b>3A</b> <sup>5</sup> $\beta_{4,  C } \geq 4000$ <b>6A</b> <sup>5</sup> $\beta_{6,  C } \geq 4000$ <b>12A</b> <sup>5</sup> $\beta_{11,  C } \geq 4000$ <b>16A</b> <sup>5</sup> $\beta_{16,  C } \geq 4000$ <b>25A</b> <sup>5</sup> $\beta_{22,  C } \geq 4000$

Dynafuzz stainless fiber	Stainless wire mesh
<b>3SF</b> $\beta_{4,  C } \geq 4000$ <b>6SF</b> $\beta_{6,  C } \geq 4000$ <b>10SF</b> $\beta_{11,  C } \geq 4000$ <b>25SF</b> $\beta_{22,  C } \geq 4000$	<b>10W</b> 10μ nominal <b>25W</b> 25μ nominal <b>40W</b> 40μ nominal <b>74W</b> 74μ nominal <b>149W</b> 149μ nominal

Seals	<b>B</b> Nitrile (Buna)
<b>V</b> Fluorocarbon	
<b>E-WS</b> EPR seals + stainless steel support mesh	

<sup>1</sup>Requires Bypass option 6 selected.  
<sup>2</sup>Only available when paired with "H" high collapse element.  
<sup>3</sup>When selected, automatically adds nickel plating to filter element. For replacement elements, add "-N" to end of filter element part number.  
<sup>4</sup>Compatible only with Element Type "91"; HP91L filter elements.  
<sup>5</sup>Compatible only with Element Types "94" and "944"; HP94L and HP944L filter elements.

# PFH840

## High Pressure In-line Filter Assemblies

Donaldson Hy-Pro's PFH pressure filters are designed to protect sensitive components in hydraulic circuits. Install the series upstream of specific components or directly after the pressure pump in smaller systems to minimize risk of failure and costly system downtime.

Ideal for use on a power unit pump discharge filter or pilot filter directly in front of valves and actuators.

**Max Flow Rate: 200 gpm (757 lpm)**

**Max Operating Pressure: 8267 psi (570 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Dynamic Filter Efficiency.

Hydraulic applications see dynamic flow changes on a regular basis. Dynamic Filter Efficiency testing takes the ISO 4409 Multi-Pass testing even further with variable flow shifts to ensure your filter elements stand up to real world conditions and maintain the highest capture and retention rates in the industry.



239



## Industrial duty.

Standard mounting holes for optional brackets, stainless steel ID tags, a variety of indicator options, and standard drain ports make the PFH the ideal choice for heavy duty hydraulic filtration.

## Unique applications.

With available nickel plating of internal components and coarse wire mesh media options, the PFH series is perfect for applications like drill rig mud pump and gearbox applications where water contamination wrecks traditional filtration. Even include Donaldson Hy-Pro's G8 Dualglass media with Water Removal to take out dirt and water and leave your equipment operating more efficiently than ever.




## Minimize the mess.

The PFH series is available with Donaldson Hy-Pro's coreless filter elements that can be readily disposed of through crushing or incineration. The circumferential o-ring bowl seal eliminates leaking and weeping. For easy cleaning and service, PFH bowls come standard with drain plugs.

## Extend the life of your element.

Unique internal flow paths provide low resistance to flow, resulting in a low housing pressure drop. Donaldson Hy-Pro's advanced filter media delivers lower operating ISO Codes to eliminate internally generated contamination meaning your filter will have an incredibly long service life to protect your sensitive components better than ever.

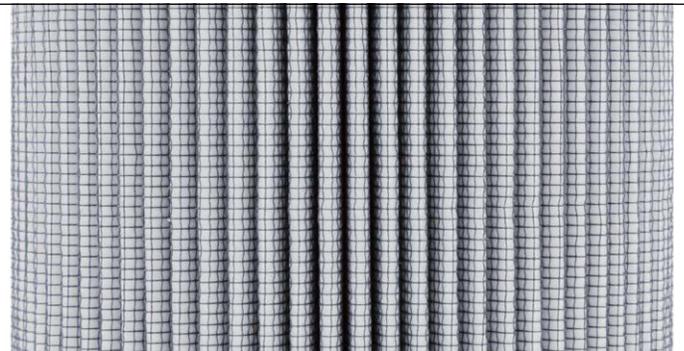

## The ideal choice for hydraulics.

Use the PFH as the main high pressure filter(s) in a hydraulic system or upstream of sensitive components as a pilot filter to protect your valves and actuators. The PFH series are engineered to provide lower operating ISO Codes than what is required for compliance with hydraulic component manufacturers warranties.

# PFH840 Reference Guide

## PFH840 model shown

(4) 1/2" - 13 UNC mounting holes

Outlet

$\Delta$ P indicator

Assembly ID tag





Powder coated filter bowl

Bowl drain with removal cap for easy service

# PFH840 Installation Drawings

Can be mounted as shown or inverted (bowl-up)

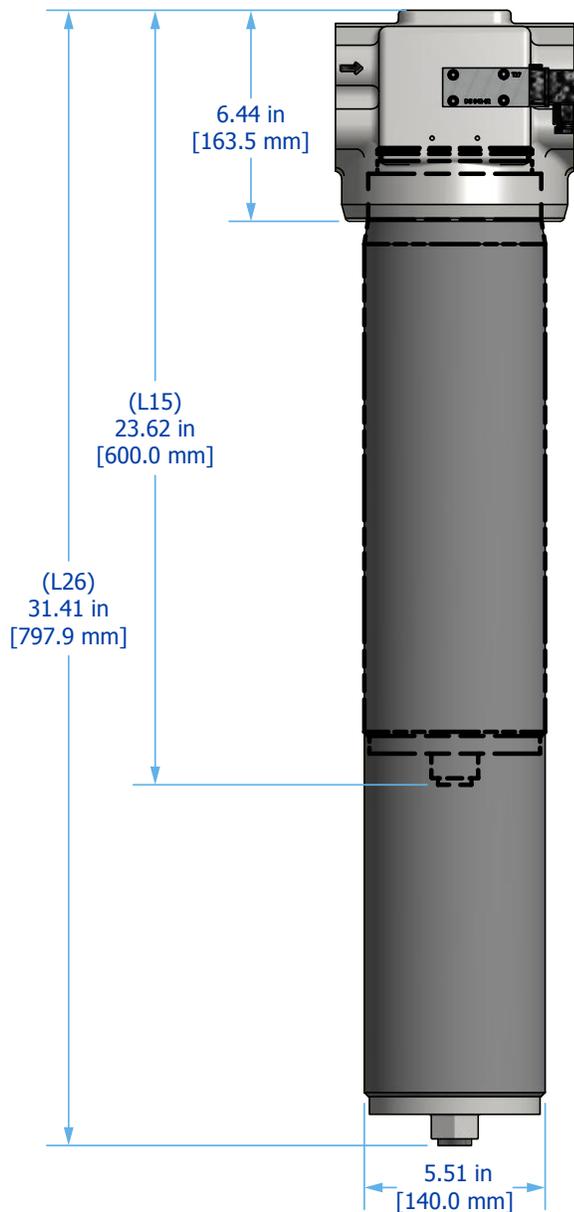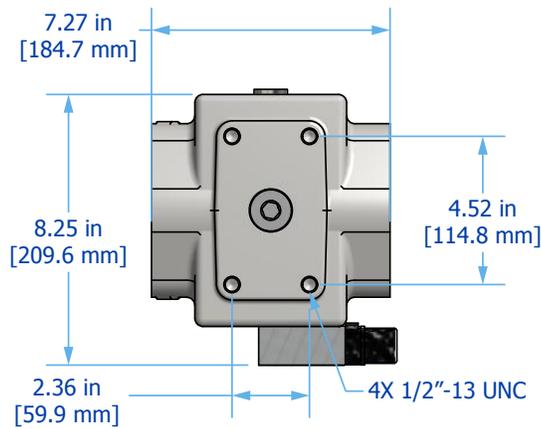

# PFH840 Specifications

Dimensions	See Installation Drawings for model specific dimensions.								
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)	<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)							
Operating Pressure	<b>PFH840</b> 4061 psi (280 bar) min. 2 x 10 <sup>6</sup> pressure cycles Nominal pressure according to DIN 24550								
Flow Fatigue Rating	<b>PFH840</b> 8267 psi (570 bar) min. 2 x 10 <sup>4</sup> pressure cycles Quasi-static operating pressure								
ΔP Indicator Trigger	73 psid (5 bard)								
Element Collapse Rating	<b>HP***N</b> 450 psid (31.0 bard) max	<b>HP***H</b> 3000 psid (206.8 bard) max	<b>HP***C</b> 250 psid (17.2 bard) max						
Integral Bypass Setting	<b>PFH840</b> 87 psid (6.0 bard) – Integral element bypass								
Materials of Construction	<b>Head</b> Cast steel	<b>Bowl with Drain Plug</b> DOM tubing	<b>Interior Coating</b> Phosphate						
			<b>Exterior Coating</b> Industrial powder coating						
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(c)}} \geq 4000$	<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(c)}} \geq 4000$	<b>W</b> Stainless steel wire mesh media $\beta_{x_{(c)}} \geq 2$ ( $\beta_x \geq 2$ )						
Replacement Elements	<p>To determine replacement elements, use the selected codes from the following page below:</p> <table border="1"> <thead> <tr> <th>Series Code</th> <th>Filter Element Part Number</th> <th>Example</th> </tr> </thead> <tbody> <tr> <td>840</td> <td>HP840[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]</td> <td>HP840NL15-25MB</td> </tr> </tbody> </table> <p>When Special Option “N” selected for housing, add “-N” to end of filter element part number for compatible Nickel plated filter element. Example: HP840NL8-6MV-N</p>			Series Code	Filter Element Part Number	Example	840	HP840[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP840NL15-25MB
Series Code	Filter Element Part Number	Example							
840	HP840[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP840NL15-25MB							
Fluid Compatibility	Biodegradable and mineral based fluids. For high water based or specified synthetics consult factory.								

# PFH840 Part Number Builder



<b>Connection</b>	<b>C32</b> 2" Code 62 flange (6000 psi)	<b>Port Option</b>	<b>Max Flow Rate</b>
			200 gpm (757 lpm)

<b>Collapse Rating</b>	<b>C<sup>2</sup></b>	250 psid (17.2 bard) – Coreless element with integral bypass (includes post assembly for element support)
	<b>H</b>	3000 psid (206.8 bard) – High collapse element with no housing bypass
	<b>N<sup>3</sup></b>	450 psid (31.2 bard) – Core-in element with housing bypass

<b>Length</b>	<b>15</b>	15" (38 cm) nominal
	<b>26</b>	26" (66 cm) nominal

<b>Bypass</b>	<b>7<sup>4</sup></b>	87 psid (6 bard) bypass
	<b>X<sup>5</sup></b>	No bypass

<b>ΔP Indicator</b>	<b>DX</b>	Electrical switch only (DIN connection)
	<b>L</b>	Visual with electric switch (DIN connection) + LED indicator
	<b>V</b>	Visual
	<b>X</b>	No indicator (port plugged)

<b>Media Selection</b>	<b>G8 Dualglass</b>		<b>G8 Dualglass + water removal</b>		<b>Stainless wire mesh</b>	
	<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b>	$\beta_{4(c)} \geq 4000$	<b>25W</b>	25μ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b>	$\beta_{6(c)} \geq 4000$	<b>40W</b>	40μ nominal	
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>10A</b>	$\beta_{11(c)} \geq 4000$	<b>74W</b>	74μ nominal	
<b>10M</b>	$\beta_{11(c)} \geq 4000$	<b>25A</b>	$\beta_{22(c)} \geq 4000$	<b>149W</b>	149μ nominal	
<b>16M</b>	$\beta_{16(c)} \geq 4000$					
<b>25M</b>	$\beta_{22(c)} \geq 4000$					

<b>Seals</b>	<b>B</b>	Nitrile (Buna)
	<b>V<sup>7</sup></b>	Fluorocarbon
	<b>E-WS<sup>7</sup></b>	EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

<sup>2</sup>Available on PFH840 only.

<sup>3</sup>PFH840 includes integral element bypass and does not include a bypass in the housing.

<sup>4</sup>PFH840 bypass setting is 87 psid (6.0 bard).

<sup>5</sup>Only available when paired with "H" high collapse element.

<sup>6</sup>When selected, automatically adds nickel plating to filter element. For replacement elements, add "-N" to end of filter element part number. Not available on PFH840 series.

<sup>7</sup>Not available with PFH840 series housings.

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# PFHB

## High Pressure Full Flow Bi-Directional Filter Assemblies

Donaldson Hy-Pro's PFHB high pressure filter assemblies are designed for applications where flow direction changes and fluid must be filtered with full flow in both directions. Protect both components and clean fluid that typically does not return to the reservoir.

Ideal for steel mills, board plants, scrap yards, and concrete mixers.

**Max Flow Rate: 95 gpm (360 lpm)**

**Max Operating Pressure: 7250 psi (500 bar)**

---

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Elements that go beyond industry standard.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities to combat the dynamic flow changes in all hydraulic applications. With media options down to  $\beta_{3(C)} \geq 4000$ , + water absorption, you get the perfect element for your application, every time.



## Two directions, one result.


With unique flow paths and internal check valves, PFHB assemblies allow hydraulic fluids to travel in both directions while maintaining the highest of filter efficiencies. Whether installed at the end of a remotely located cylinder or small cylinders where used fluid is not able to return to the tank for standard filtration, the PFHB captures contaminants in both flow directions where others can't.

## Always ready.


Perfect for use in hydrostatic loop circuits and any system where flow can change direction, the PFHB is ready for capturing particles in both directions with absolute efficiency - automatically.



## PFHB Installation Drawing

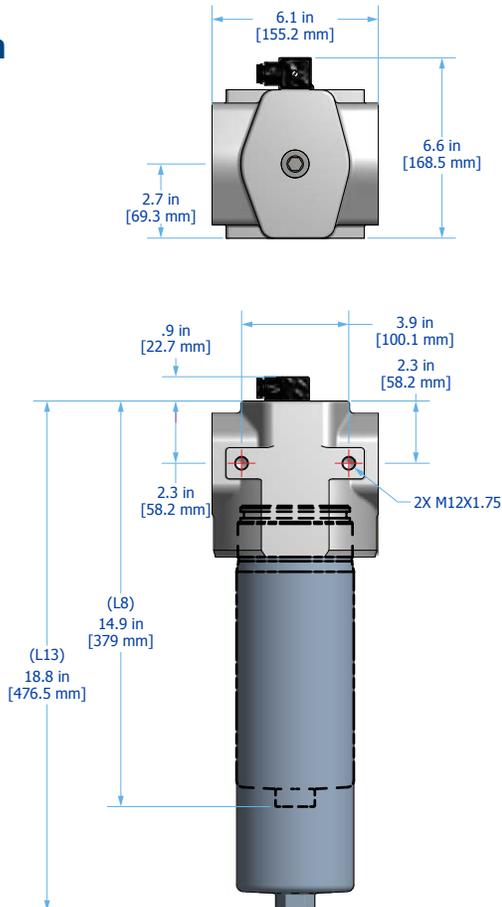

## Bi-Directional Schematic

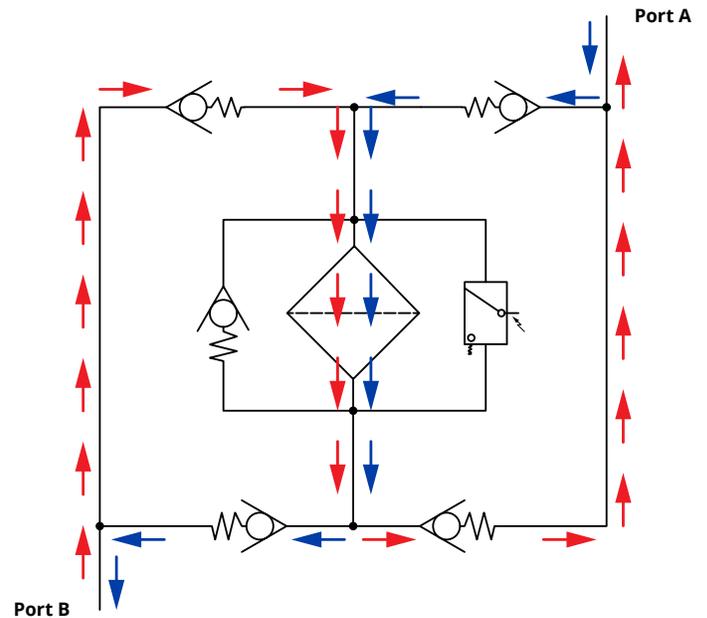

# PFHB Specifications

**Dimensions<sup>1</sup>** See Installation Drawing for model specific dimensions.

<b>Operating Temperature</b>	<b>Fluid Temperature</b>	<b>Ambient Temperature</b>
	30°F to 225°F (0°C to 105°C)	-4°F to 140°F (-20C to 60C)

<b>Operating Pressure</b>	7250 psi (500 bar)
---------------------------	--------------------

<b>ΔP Indicator Trigger</b>	73 psid (5 bard)
-----------------------------	------------------

<b>Element Collapse Rating</b>	<b>HP419NL</b>	<b>HP419HL</b>	<b>HP419CL</b>
	450 psid (31.0 bard) max	3000 psid (206.8 bard) max	250 psid (17.2 bard) max

<b>Materials of Construction</b>	<b>Head</b>	<b>Bowl<sup>1</sup></b>	<b>Interior Coating</b>	<b>Exterior Coating</b>
	Cast steel	Extruded steel	Phosphate	Industrial powder coating

<b>Media Description</b>	<b>M</b>	<b>A</b>	<b>W</b>
	G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[C]}} \geq 4000$	G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{[C]}} \geq 4000$	Stainless steel wire mesh media $\beta_{x_{[C]}} \geq 2$ ( $\beta_x \geq 2$ )

<b>Replacement Elements</b>	<b>To determine replacement elements, use the selected codes from the following page below:</b>
	<b>Filter Element Part Number</b> HP419[Collapse Code] L13 – [Media Selection Code][Seal Code]

**Example**  
HP419NL13-25MB

<b>Fluid Compatibility</b>	Biodegradable and mineral based fluids. For high water based or specified synthetics, consult factory.
----------------------------	--


**Filter Sizing<sup>2</sup>** Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

<b>ΔP Factors<sup>2</sup></b>	<b>Length</b>	<b>Units</b>	<b>Media</b>						
			<b>1M</b>	<b>3M</b>	<b>6M</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
L13		psid/gpm	0.2364	0.1995	0.1546	0.1387	0.1357	0.1307	0.0235
		bard/lpm	0.0043	0.0036	0.0028	0.0025	0.0025	0.0024	0.0004

<sup>1</sup>Bowl comes standard with drain plug.

<sup>2</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt.

# PFHB Part Number Builder



<b>Connection</b>	<b>Port Option</b> <b>C24</b> 1½" Code 62 flange	<b>Max Flow Rate</b> 95 gpm (360 lpm) <sup>1</sup>
-------------------	---	---

<b>Collapse</b>	<b>C</b> 250 psid (17.2 bard) – Coreless element with integral bypass (includes post assembly for element support) <sup>1</sup>
	<b>H</b> 3000 psid (206.8 bard) – High collapse element with no housing bypass
	<b>N</b> 450 psid (31.2 bard) – Core-in element with housing bypass

<b>Element Length</b>	<b>13</b> 13" (33 cm) nominal length filter element and housing
-----------------------	---

<b>Bypass</b>	<b>7</b> 102 psid (7 bard) bypass
	<b>X</b> No bypass

<b>ΔP Indicator</b>	<b>DX</b> Electrical switch only (DIN connection)
	<b>L</b> Visual with electric switch (DIN connection) + LED indicator
	<b>V</b> Visual/Mechanical
	<b>X</b> No indicator (port plugged)

<b>Media Selection</b>	<b>G8 Dualglass</b>	<b>G8 Dualglass + water removal</b>	<b>Stainless wire mesh</b>
	<b>1M</b> β <sub>3(c)</sub> ≥ 4000	<b>3A</b> β <sub>4(c)</sub> ≥ 4000	<b>25W</b> 25μ nominal
<b>3M</b> β <sub>4(c)</sub> ≥ 4000	<b>6A</b> β <sub>6(c)</sub> ≥ 4000	<b>40W</b> 40μ nominal	
<b>6M</b> β <sub>6(c)</sub> ≥ 4000	<b>10A</b> β <sub>11(c)</sub> ≥ 4000	<b>74W</b> 74μ nominal	
<b>10M</b> β <sub>11(c)</sub> ≥ 4000	<b>25A</b> β <sub>22(c)</sub> ≥ 4000	<b>149W</b> 149μ nominal	
<b>16M</b> β <sub>16(c)</sub> ≥ 4000			
<b>25M</b> β <sub>22(c)</sub> ≥ 4000			

<b>Seals</b>	<b>B</b> Nitrile (Buna)
	<b>V</b> Fluorocarbon
	<b>E-WS</b> EPR seals + stainless steel support mesh

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# DLF(M)

## Low Pressure High Flow Duplex Filter Assembly

Designed to maintain continuous filtration, even throughout element servicing, the DLF series filter assemblies provide two high efficiency, high capacity filter housings coupled by a user-friendly 6-way, 3 position valve that completely seals the system from the atmosphere. Use the DLF(M) to remove particulate and water from a variety of fluids and maximize your uptime.

Ideal for systems where filters must be serviced without system interruption such as hydraulic, gearbox, pulp and paper, rolling mill oil, bulk oil handling, and high flow return-line filtration.

**Max Operating Pressure: 150 psi (10 bar)**

**Available options up to 450 psi (31 bar)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## One assembly, twice the filtration.

DLF assemblies combine two powerful LF housings to deliver lower ISO Codes faster than ever. With a turn of the lever, you'll introduce a new element to your fluid while simultaneously valving the used element out of service to easily change and replace, all while your system continues operating at full capacity.



## Built for industrial use.

Constructed from heavy duty carbon steel (standard) or the optional 304 or 316 stainless steel, the DLF filter housings are designed to excel in even the toughest industrial conditions. Multiround units go even further to provide increased capacity whether you're operating with incredibly high viscosity oils or extreme flow rates.



## Filtration starts with the filter.

The oversized coreless filter element in every DLF delivers lower ISO Codes over a long element lifespan to ensure low disposal impact, simultaneously reducing your environmental footprint and your bottom line. To top it off, select elements come standard with an integral zero-leak bypass so with every filter change you get a new bypass along with peace of mind.



## Seamlessly integrated into your systems.

Multiple connection options provide you with the ability to integrate the DLF directly in-line on your systems and get the most impact from your filtration directly where you need it.



## Inherently safe.

The true 6-way valve with internal pressure equalization and fill line allows for seamless transition of flow from one housing to the other. As the valve is repositioned, oil from the in-service housing is redistributed to the out-of-service housing to purge air before it can move downstream – meaning you maintain fluid levels, preserve system control and prevent cavitation of your components, all while ensuring your fluid stays remarkably clean.




## Clean oil has never been easier.

Designed to combine incredible capacity and low maintenance, the oversized housing with secure swivel bolts allow for effortless element changes with all the parts kept right where they need to be. The top loading housing and post/nipple system provide incredible ease of use and make element installation and maintenance easier than ever.




# DLF Installation Drawing

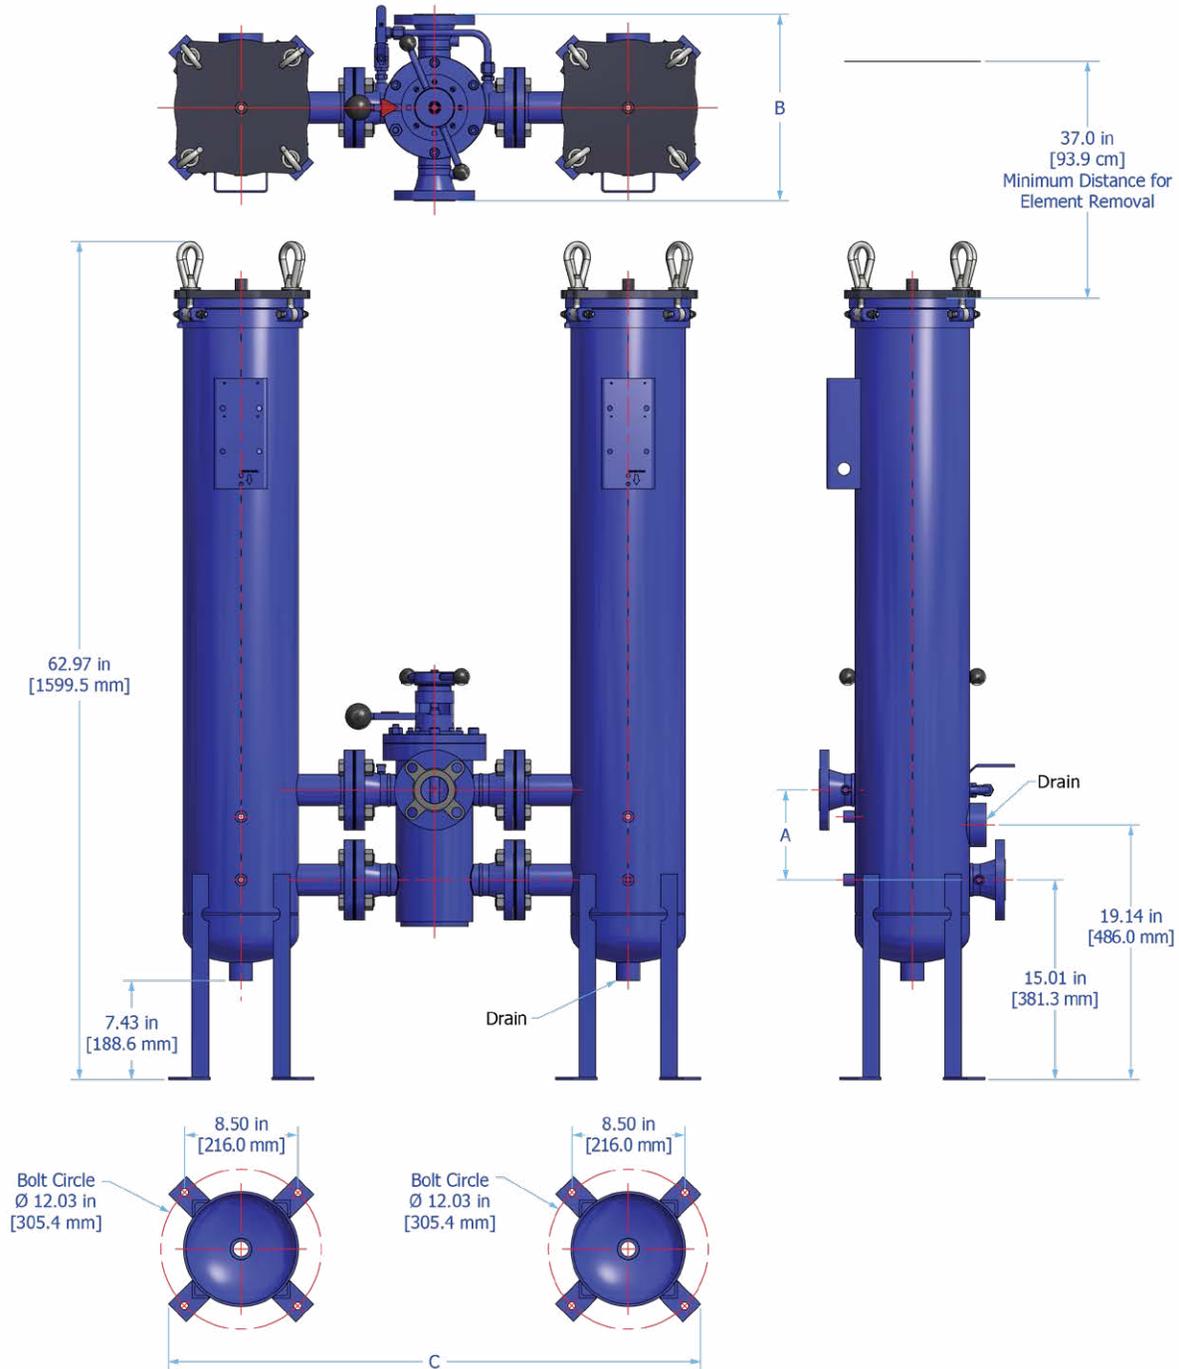

Series	Port Size	Vessel Diameter	A	B	C	Weight
DLF	2	8.0 in 20.3 cm	11.7 in 29.7 cm	14.0 in 35.6 cm	41.4 in 105.2 cm	389.0 lb 176.4 kg
	3	8.0 in 20.3 cm	11.7 in 29.7 cm	14.0 in 35.6 cm	43.4 in 110.2 cm	451.0 lb 204.6 kg
	4	8.0 in 20.3 cm	15.2 in 38.6 cm	17.0 in 43.2 cm	50.7 in 128.8 cm	544.0 lb 246.8 kg

<sup>1</sup>Dimensions are approximations taken from base model and will vary according to options chosen and customer sizing requirements.

# DLFM Installation Drawing

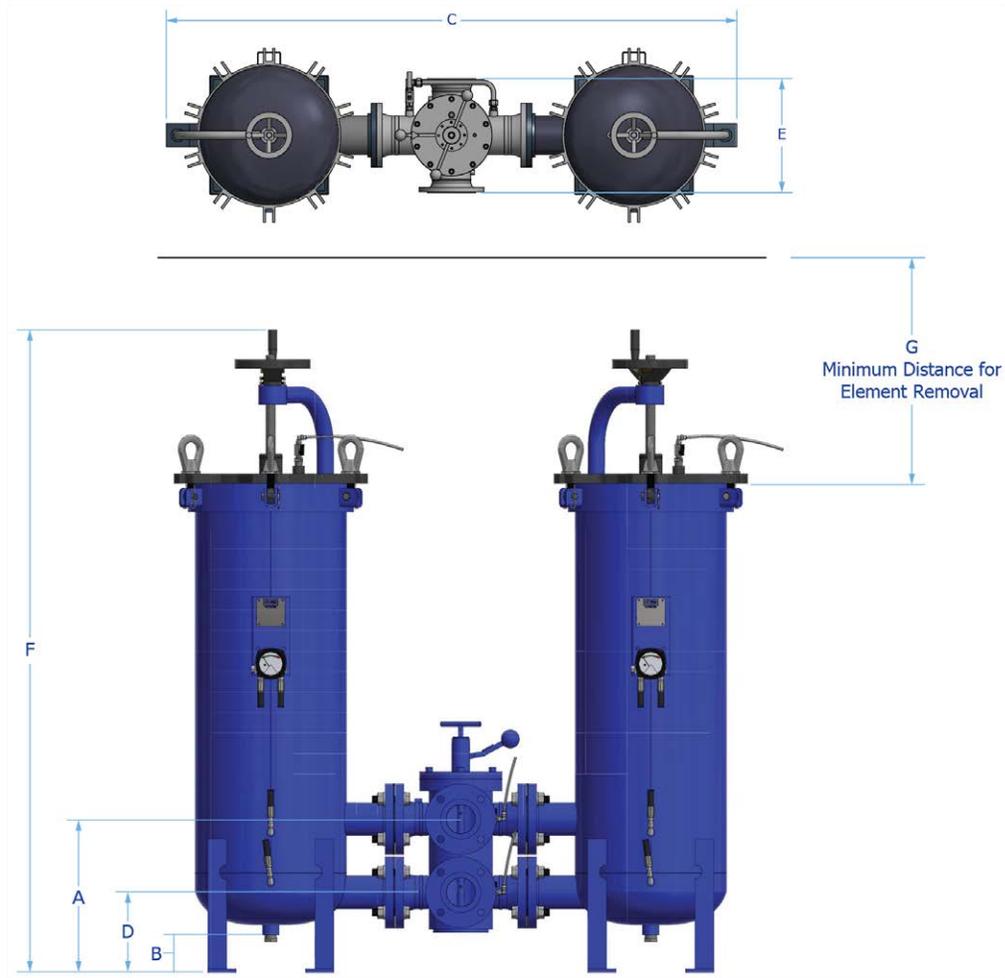

Series	Number of Elements	Port Size	Vessel Diameter	A	B	C	D	E	F	G	Weight
DLFM	3	2	16.0 in 40.6 cm	19.1 in 48.6 cm	8.4 in 21.3 cm	68.8 in 172.2 cm	12.4 in 31.4 cm	14.0 in 35.6 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	774.0 lb 351.0 kg
		3	16.0 in 40.6 cm	20.1 in 51.1 cm	8.4 in 21.3 cm	69.8 in 177.3 cm	12.4 in 31.4 cm	14.0 in 35.6 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	875.0 lb 397.0 kg
	4	4	16.0 in 40.6 cm	22.6 in 57.5 cm	8.4 in 21.3 cm	76.8 in 195.0 cm	12.4 in 31.4 cm	16.8 in 42.5 cm	74.0 in 187.9 cm	37.0 in 94.0 cm	988.0 lb 448.0 kg
		2	18.0 in 45.7 cm	19.1 in 48.6 cm	7.9 in 20.1 cm	71.8 in 182.4 cm	12.4 in 31.4 cm	14.0 in 35.6 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	944.0 lb 428.0 kg
4	3	3	18.0 in 45.7 cm	20.1 in 51.1 cm	7.9 in 20.1 cm	73.8 in 187.5 cm	12.4 in 31.4 cm	14.0 in 35.6 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	1045.0 lb 474.0 kg
		4	18.0 in 45.7 cm	22.6 in 57.5 cm	7.9 in 20.1 cm	80.8 in 205.3 cm	12.4 in 31.4 cm	16.8 in 42.5 cm	79.0 in 200.6 cm	37.0 in 94.0 cm	1160.0 lb 526.0 kg
	9	3	24.0 in 61.0 cm	20.1 in 51.1 cm	7.5 in 19.1 cm	85.8 in 217.9 cm	12.4 in 31.4 cm	14.0 in 35.6 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	1629.0 lb 739.0 kg
9	4	4	24.0 in 61.0 cm	22.6 in 57.5 cm	7.5 in 19.1 cm	92.8 in 235.7 cm	12.4 in 31.4 cm	16.8 in 42.5 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	1742.0 lb 791.0 kg
		6	24.0 in 61.0 cm	23.9 in 60.7 cm	7.5 in 19.1 cm	97.8 in 248.4 cm	12.4 in 31.4 cm	19.8 in 50.2 cm	81.5 in 207.0 cm	37.0 in 94.0 cm	2063.0 lb 936.0 kg


<sup>1</sup>Dimensions are approximations taken from base model and will vary according to options chosen and customer sizing requirements. Contact factory to request model specific drawings or for any models not listed above.  
Dimensions shown are for 36" long filter elements.

# DLF(M) Specifications

Dimensions	See Installation Drawing for model specific dimensions.									
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)					<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)				
Operating Pressure	150 psi (10.3 bar) standard. See special options for additional pressure ratings.									
Element Collapse Rating	<b>HP105</b> 150 psi (10.3 bar)	<b>HP106</b> 150 psi (10.3 bar)	<b>HP107</b> 150 psi (10.3 bar)	<b>HP8314 (All Codes)</b> 150 psi (10.3 bar)						
Integral Element Bypass Setting	<b>HP106</b> 25 psid (1.7 bard)	<b>HP107</b> 50 psid (3.4 bard)	<b>HP8314 (Code 82)</b> 25 psid (1.7 bard)				<b>HP8314 (Code 83)</b> 50 psid (3.4 bard)			
Materials of Construction	<b>Housing</b> Industrial coated carbon steel									
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{(c)}} \geq 4000$			<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{(c)}} \geq 4000$				<b>W</b> Stainless steel wire mesh media $\beta_{x_{(c)}} \geq 2$ ( $\beta_x \geq 2$ )		
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:									
	<b>Element Type Code</b>	<b>Filter Element Part Number</b>							<b>Example</b>	
	5	HP105L[Length Code] – [Media Selection Code][Seal Code]							HP105L36–6AB	
	6	HP106L[Length Code] – [Media Selection Code][Seal Code]							HP106L18–10MV	
	7	HP107L[Length Code] – [Media Selection Code][Seal Code]							HP107L36–25MB	
	8X	HP8314L[Length Code] – [Media Selection Code][Seal Code]							HP8314L39–25WV	
	82	HP8314L[Length Code] – [Media Selection Code][Seal Code]							HP8314L16–12MB	
	85	HP8314L[Length Code] – [Media Selection Code][Seal Code]							HP8314L39–16ME–WS	
Fluid Compatibility	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester or skydrol fluid compatibility select fluid compatibility from special options.									
Filter Sizing <sup>1</sup>	Filter assembly clean element $\Delta P$ after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See filter assembly sizing guidelines & examples. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.									
$\Delta P$ Factors <sup>1</sup>	<b>Model</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>						
				<b>1M</b>	<b>3M</b>	<b>6L</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	DLF	L36/L39	psid/gpm bard/lpm	0.0324 0.0009	0.0273 0.0008	0.0212 0.0007	0.0190 0.0007	0.0186 0.0007	0.0179 0.0007	0.0032 0.0006
	DLFM3	L36/L39	psid/gpm bard/lpm	0.0081 0.00015	0.0055 0.0001	0.0051 0.00009	0.0045 0.00008	0.0041 0.00007	0.0035 0.00006	0.0029 0.00005
	DLFM4	L36/L39	psid/gpm bard/lpm	0.0067 0.00012	0.0048 0.00009	0.0044 0.00008	0.004 0.00007	0.0037 0.00007	0.0032 0.00006	0.0025 0.00005
	DLFM9	L36/L39	psid/gpm bard/lpm	0.0034 0.00006	0.0025 0.00005	0.0022 0.00004	0.002 0.00004	0.0019 0.00003	0.0016 0.00003	0.0013 0.00002

<sup>1</sup>Max flow rates and  $\Delta P$  factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on page 22 for viscosity change.

# DLF(M) Part Number Builder

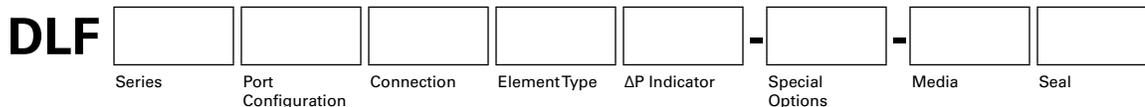

Series	Number of Elements	Max Flow Rate
<b>omit</b>	1 element	200 gpm (757 lpm) <sup>1</sup>
<b>M3</b>	3 elements	600 gpm (2271 lpm) <sup>1</sup>
<b>M4</b>	4 elements	800 gpm (3028 lpm) <sup>1</sup>
<b>M9</b>	9 elements	1800 gpm (6814 lpm) <sup>1</sup>
<b>M14</b>	14 elements	2800 gpm (10,600 lpm) <sup>1</sup>
<b>M22</b>	22 elements	4400 gpm (16,656 lpm) <sup>1</sup>

Port Configuration	Options
<b>K</b>	Opposite side porting (180°, same center line)
<b>O</b>	Opposite side porting (180°, in-line (different center line))
<b>S</b>	Same side porting (standard)

Connections	Options
<b>A2</b>	2" ANSI flange
<b>A3</b>	3" ANSI flange
<b>A4</b>	4" ANSI flange (M3-M14 Options Only)
<b>A6</b>	6" ANSI flange (M3-M14 Options Only)
<b>D2</b>	DN50 2" DIN flange
<b>D3</b>	DN80 3" DIN flange
<b>D4</b>	DN100 4" DIN flange (M3-M14 Options Only)
<b>D6</b>	DN150 6" DIN flange (M3-M14 Options Only)
<b>F15</b>	1.5" Code 61 flange
<b>F2</b>	2" Code 61 flange
<b>F3</b>	3" Code 61 flange

Element Type	Options
<b>5</b>	HP105 – no bypass
<b>6</b>	HP106 – 25 psid (1.7 bard) integral element bypass
<b>7</b>	HP107 – 50 psid (3.4 bard) integral element bypass
<b>8X</b>	HP8314 – no bypass
<b>82</b>	HP8314 – 25 psid (1.7 bard) integral housing bypass
<b>85</b>	HP8314 – 50 psid (3.4 bard) integral housing bypass

ΔP Indicator	Options
<b>D</b>	22 psid visual gauge + electric switch
<b>E</b>	22 psid visual gauge
<b>F</b>	45 psid visual gauge + electric switch
<b>G</b>	45 psid visual gauge
<b>H*</b>	65 psid visual gauge + electric switch
<b>J*</b>	65 psid visual gauge (elements 5 or 8* only)
<b>P</b>	2 pressure gages (industrial liquid filled)
<b>X</b>	None (ports plugged)

Special Options	Options
<b>omit</b>	150 psi (10.3 bar) max operating pressure, carbon steel
<b>F</b>	Filter element ΔP gauge with tattle tale follower needle
<b>G</b>	Spill retention pan with fork guides (industrial coated steel)
<b>P9<sup>2</sup></b>	Phosphate ester fluid compatibility modification
<b>S1<sup>3</sup></b>	150 psi (10.3 bar) max oper. pressure, 304 stainless steel
<b>S2<sup>3</sup></b>	250 psi (17.2 bar) max oper. pressure, 304 stainless steel
<b>S3<sup>3</sup></b>	450 psi (31.0 bar) max oper. pressure, 304 stainless steel
<b>S9<sup>4</sup></b>	Skydrol fluid compatibility modification
<b>U1<sup>5</sup></b>	U Code (ASME U code certified - only applies to vessels)
<b>W</b>	Automatic air bleed valve
<b>X</b>	250 psi (17.2 bar) max oper. pressure, carbon steel
<b>Y</b>	450 psi (31.0 bar) max oper. pressure, carbon steel

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A</b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25μ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A</b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40μ nominal
<b>6L</b>	$\beta_{6(c)} \geq 4000$	<b>10A<sup>6</sup></b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74μ nominal
<b>10M<sup>6</sup></b>	$\beta_{11(c)} \geq 4000$	<b>25A</b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149μ nominal
<b>16M</b>	$\beta_{16(c)} \geq 4000$		
<b>25M</b>	$\beta_{22(c)} \geq 4000$		

Seals	Options
<b>B</b>	Nitrile (Buna)
<b>V</b>	Fluorocarbon
<b>E-WS</b>	EPR + Stainless Support Mesh (For Skydrol Applications)

<sup>1</sup>Maximum recommended flow rate based on velocity through port and internal flow path. Consult sizing guidelines or consult factory for sizing based on flow rate, viscosity, temperature, filter media selection.  
<sup>2</sup>When selected, must be paired with Seal option "V" Contact factory for more information or assistance in fluid compatibility.  
<sup>3</sup>Lid closure hardware is plated carbon steel.  
<sup>4</sup>When selected, must be paired with Seal option "E-WS." Contact factory for more information or assistance in fluid compatibility.  
<sup>5</sup>U1 option only applies to vessels not to transfer valve.  
<sup>6</sup>For elements HP8314, use 12M or 12A for respective media code in place of 10M or 10A.  
<sup>6</sup>5psi indicator options are to only to be used with 3" connection and lower.  
 For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# DFN

## Low Pressure Duplex Filter Assembly

Designed to maintain continuous filtration, even throughout element servicing, the DFN series filter assemblies provide a compact and user-friendly 4-way, 2 position housing completely sealed from the atmosphere. Remove particulate and water from a variety of fluids including hydrogen seal, oil, turbine lube oil, bearing lube oil, and FD-ID-PA fan lube.

Ideal for systems where filters must be serviced without system interruption such as hydraulic, gearbox, wind turbine, boiler feed pump, mechanical/electro hydraulic control, and servo systems.

**Max Operating Pressure: 888 psi (61.2 bar)**

**Max Flow Rate: 70 gpm (265 lpm)**

Donaldson  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Two positions, one result.

DFN housings provide unmatched in-line filtration with incredible ease of use. With a squeeze of the trigger and turn of the wrist, you'll introduce a new element to your fluid while simultaneously valving the used element out of service to easily change and replace, all while your system continues operating at full capacity.



## All duplexes are not created equal.


Air in any lube system can quickly cause failure and force you to take your system down for maintenance. DFN assemblies utilize internal equalization and external vent ports to automatically push oil into and purge air out from the unused housing without any added effort.

## Elements that go beyond industry standard.


DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3(C)} \geq 4000 +$  water absorption, you get the perfect element for your application, every time.



## DFN19 Installation Drawing

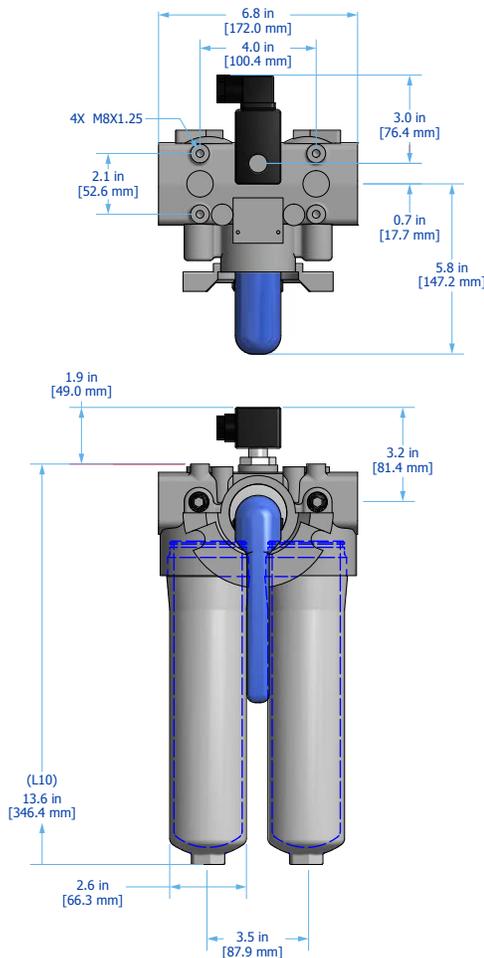

## DFN39 Installation Drawing

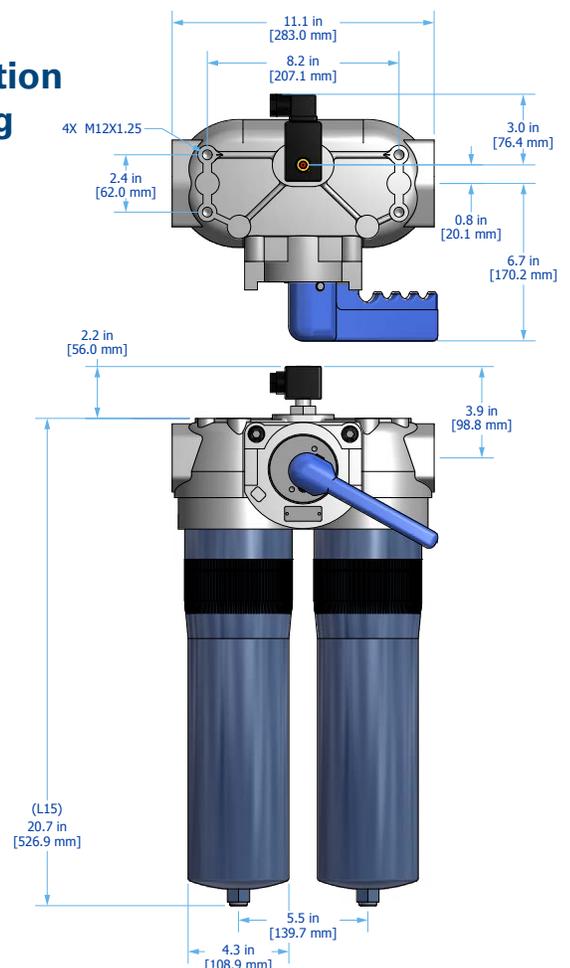

# DFN Specifications

**Dimensions** See Installation Drawing for model specific dimensions.

<b>Operating Temperature</b>	<b>Fluid Temperature</b>	<b>Ambient Temperature</b>
	30°F to 225°F (0°C to 105°C)	-4°F to 140°F (-20C to 60C)

<b>Operating Pressure</b>	<b>DFN19</b>	<b>DFN39</b>
	888 psi (61.2 bar) max	350 psi (24.1 bar) max

**ΔP Indicator Trigger** 32 psid (2.21 bard)

<b>Element Collapse Rating</b>	<b>Normal Collapse (Collapse Option N)</b>	<b>High Collapse (Collapse Option H)</b>
	450 psid (31.0 bard)	3000 psid (206.8 bard)

<b>Materials of Construction</b>	<b>Head</b>	<b>Bowl</b>	<b>Interior Coating</b>
	Aluminum	L10 – Aluminum L15 – Steel	Anodized

<b>Media Description</b>	<b>M</b>	<b>A</b>	<b>W</b>
	G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[C]}} \geq 4000$	G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{[C]}} \geq 4000$	Stainless steel wire mesh media $\beta_{x_{[C]}} \geq 2$ ( $\beta_x \geq 2$ )

**Replacement Elements** To determine replacement elements, use corresponding codes from your assembly part number:

<b>Series Code</b>	<b>Filter Element Part Number</b>	<b>Example</b>
19	HP19[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP19HL6-10MB
39	HP39[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]	HP39NL6-6AV

**Fluid Compatibility** Biodegradable and mineral based fluids. For high water based of specified synthetics, consult factory.

**Filter Sizing<sup>1</sup>** Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.

ΔP Factors <sup>1</sup>	Model	Length	Units	Media						
				1M	3M	6M	10M	16M	25M	**W
DFN19N	L10		psid/gpm	1.4943	1.2610	1.0420	0.7820	0.6489	0.6250	0.3130
			bard/lpm	0.0272	0.0230	0.0190	0.0142	0.0118	0.0114	0.0057
DFN39N	L15		psid/gpm	0.4633	0.3910	0.3010	0.2660	0.2180	0.2100	0.1170
			bard/lpm	0.0084	0.0071	0.0055	0.0048	0.0040	0.0038	0.0021

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt.

# DFN Part Number Builder



Series	<b>19</b>	25 gpm (95 lpm) max flow rate <sup>1</sup>
	<b>39</b>	70 gpm (265 lpm) max flow rate <sup>1</sup>

Connection	<b>DFN19</b>	<b>DFN39</b>
	<b>F16<sup>2</sup></b> 1" Code 61 flange	<b>F24<sup>2</sup></b> 1½" Code 61 flange

Collapse Rating	<b>H</b>	3000 psid (206.8 bard)
	<b>N</b>	450 psid (31.0 bard)

Element Length	<b>DFN19</b>	<b>DFN39</b>
	<b>10</b> 10" (25 cm) nominal length filter element and housing	<b>15</b> 15" (38 cm) nominal length filter element and housing

Bypass	<b>3</b>	Integrated bypass – 50 psid (3.4 bard)
	<b>X</b>	No bypass

ΔP Indicator	<b>D</b>	Visual with electric switch (DIN connection)
	<b>V</b>	Visual/Mechanical
	<b>X</b>	No indicator (port plugged)

Media Selection	<b>G8 Dualglass</b>	<b>G8 Dualglass + water removal</b>	<b>Stainless wire mesh</b>
	<b>1M</b> β <sub>3(c)</sub> ≥ 4000 <b>3M</b> β <sub>4(c)</sub> ≥ 4000 <b>6M</b> β <sub>6(c)</sub> ≥ 4000 <b>10M</b> β <sub>11(c)</sub> ≥ 4000 <b>16M</b> β <sub>16(c)</sub> ≥ 4000 <b>25M</b> β <sub>22(c)</sub> ≥ 4000	<b>3A<sup>3</sup></b> β <sub>4(c)</sub> ≥ 4000 <b>6A<sup>3</sup></b> β <sub>6(c)</sub> ≥ 4000 <b>10A<sup>3</sup></b> β <sub>11(c)</sub> ≥ 4000 <b>25A<sup>3</sup></b> β <sub>22(c)</sub> ≥ 4000	<b>25W</b> 25μ nominal <b>40W</b> 40μ nominal <b>74W</b> 74μ nominal <b>149W</b> 149μ nominal

Seals	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon

<sup>1</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>2</sup>Metric threads for flange connection bolts. See Appendix for exact connection sizes and specifications.

<sup>3</sup>Water Removal Media available only with Collapse option "N."

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# DFH

## High Pressure Duplex Filter Assembly

The DFH series is designed to remove particulate and water from a variety of fluids including hydrogen seal oil, turbine lube oil, bearing lube oil, and FD-ID-PA fan lube. Applicable for wind turbine, boiler feed pump, mechanical/electro hydraulic control, and fuel handling systems.

Ideal for systems where filters must be serviced while continuous operation is not interrupted such as hydraulic, gearbox, and servo systems.

**Max Operating Pressure: 3600 psi (248 bar)**

**Max Flow Rate: 70 gpm (265 lpm)**

**Donaldson.**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Elements that go beyond industry standard.

DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3(C)} \geq 4000$ , + water absorption, you get the perfect element for your application, every time.



## Two positions, one result.


DFH housings provide unmatched in-line filtration with incredible ease of use. With a squeeze of the trigger and turn of the wrist, you'll introduce a new element to your fluid while simultaneously valving the used element out of service to easily change and replace, all while your system continues operating at full capacity.

## All duplexes are not created equal.


Air in any lube system can quickly cause failure and force you to take your system down for maintenance. DFH assemblies utilize internal equalization and external vent ports to automatically push oil into and purge air out from the unused housing without any added effort.



### DFH19 Installation Drawing

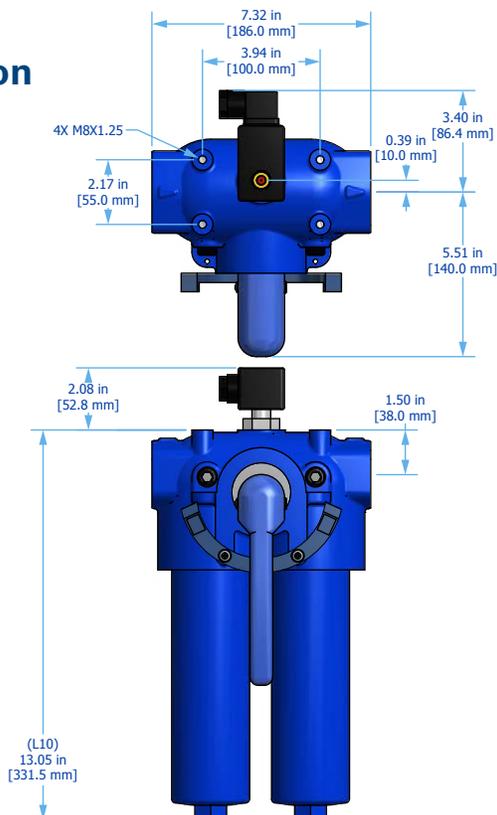

### DFH39 Installation Drawing

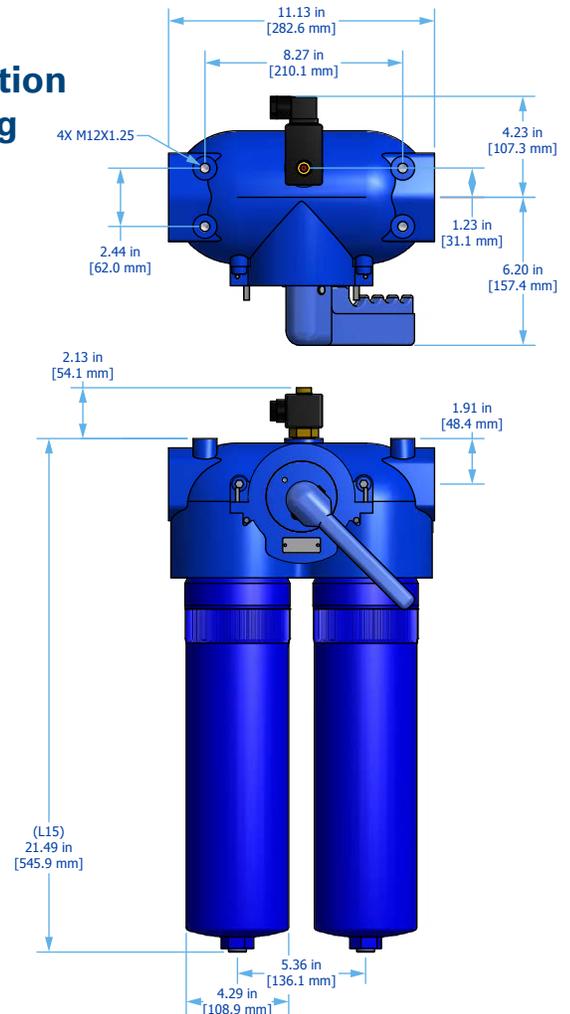

# DFH Specifications

Dimensions	See Installation Drawing for model specific dimensions.											
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)			<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)								
Operating Pressure	<b>DFH19</b> 3600 psi (248.2 bar) max			<b>DFH39</b> 3000 psi (206.8 bar) max								
ΔP Indicator Trigger	73 psid (5 bard)											
Element Collapse Rating	<b>Normal Collapse (Collapse Option N)</b> 450 psid (31.0 bard)				<b>High Collapse (Collapse Option H)</b> 3000 psid (206.8 bard)							
Materials of Construction	<b>Head</b> Cast steel			<b>Bowl</b> Cast steel			<b>Housing Bypass Valve</b> Steel					
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[c]}} \geq 4000$			<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{[c]}} \geq 4000$			<b>W</b> Stainless steel wire mesh media $\beta_{x_{[c]}} \geq 2$ ( $\beta_x \geq 2$ )					
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:											
	<b>Series Code</b>	<b>Filter Element Part Number</b>					<b>Example</b>					
	19	HP19[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]					HP19HL6-10MB					
	39	HP39[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]					HP39NL6-6AV					
Fluid Compatibility	Biodegradable and mineral based fluids. For high water based of specified synthetics, consult factory.											
Filter Assembly Sizing <sup>1</sup>	Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See below for viscosity correction formula. For applications with extreme cold start condition contact Donaldson Hy-Pro for sizing recommendations.											
	Step 1: Calculate ΔP coefficient for actual viscosity											
	Using Saybolt Universal Seconds (SUS)				Using Centistokes (cSt)							
	$\Delta P$ Coefficient	=	$\frac{\text{Actual Operating Viscosity}^1 \text{ (SUS)}}{150}$	X	$\frac{\text{Actual Specific Gravity}}{0.86}$	$\Delta P$ Coefficient	=	$\frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32}$	$\frac{\text{Actual Specific Gravity}}{0.86}$			
	Step 2: Calculate actual clean filter assembly ΔP at both operating and cold start viscosity											
	Actual Assembly Clean ΔP	=	Flow Rate	X	ΔP Coefficient (from Step 1)	X	Assembly ΔP Factor (from sizing table)					
ΔP Factors <sup>1</sup>	<b>Model</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>		<b>1M</b>	<b>3M</b>	<b>6M</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	DFH19	L10	psid/gpm bard/lpm	1.494 0.0272	1.261 0.0230	1.042 0.0190	0.782 0.0142	0.649 0.0118	0.625 0.0114	0.313 0.0057		
	DFH39	L15	psid/gpm bard/lpm	0.463 0.0084	0.391 0.0071	0.301 0.0055	0.266 0.0048	0.218 0.0040	0.210 0.0038	0.117 0.0021		

<sup>1</sup>Max flow rates and ΔP factors assume  $\beta = 150$  SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on page 22 for viscosity change.

# DFH Part Number Builder



Series	<b>19</b>	25 gpm (95 lpm) max flow rate <sup>1</sup>
	<b>39</b>	70 gpm (265 lpm) max flow rate <sup>1</sup>

Connection	<b>DFH19</b>	<b>DFH39</b>
	<b>F16<sup>2</sup></b> 1" Code 61 flange	<b>F24<sup>2</sup></b> 1½" Code 61 flange

Collapse	<b>H</b>	3000 psid (206.8 bard)
	<b>N</b>	450 psid (31.0 bard)

Element Length	<b>DFH19</b>	<b>DFH39</b>
	<b>10</b> 10" (25 cm) nominal length filter element and housing	<b>15</b> 15" (38 cm) nominal length filter element and housing

Bypass	<b>7</b>	102 psid (7 bard) bypass
	<b>X</b>	No bypass

ΔP Indicator	<b>D</b>	Visual with electric switch (DIN connection)
	<b>V</b>	Visual/Mechanical
	<b>X</b>	No indicator (port plugged)

Media Selection	G8 Dualglass	G8 Dualglass + water removal	Stainless wire mesh
<b>1M</b>	$\beta_{3(c)} \geq 4000$	<b>3A<sup>3</sup></b> $\beta_{4(c)} \geq 4000$	<b>25W</b> 25μ nominal
<b>3M</b>	$\beta_{4(c)} \geq 4000$	<b>6A<sup>3</sup></b> $\beta_{6(c)} \geq 4000$	<b>40W</b> 40μ nominal
<b>6M</b>	$\beta_{6(c)} \geq 4000$	<b>10A<sup>3</sup></b> $\beta_{11(c)} \geq 4000$	<b>74W</b> 74μ nominal
<b>10M</b>	$\beta_{11(c)} \geq 4000$	<b>25A<sup>3</sup></b> $\beta_{22(c)} \geq 4000$	<b>149W</b> 149μ nominal
<b>16M</b>	$\beta_{16(c)} \geq 4000$		
<b>25M</b>	$\beta_{22(c)} \geq 4000$		

Seals	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon

<sup>1</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>2</sup>Metric threads for flange connection bolts. See Appendix for exact connection sizes and specifications.

<sup>3</sup>Water Removal Media available only with Collapse option "N."

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# BT Breathers

with T.R.A.P.<sup>™</sup> Technology

## Self-Regenerating Moisture and Particulate Breathers

Protect your uptime, critical hydraulic & lube assets and fluid life. Donaldson Hy-Pro Thermally Reactive Advanced Protection (T.R.A.P) breathers are critical in Donaldson Hy-Pro's Total System Cleanliness approach as a barrier preventing airborne particles and water from entering reservoirs and gearboxes. Unlike traditional desiccant breathers, T.R.A.P breathers can self-regenerate their water-holding capacity, extending the life of the breather and lowering the total cost of ownership.

Donaldson  
HY-PRO<sup>™</sup>



THERMALLY REACTIVE  
ADVANCED PROTECTION

[hyprofiltration.com/](http://hyprofiltration.com/)




## Long life, fewer change-outs.

Unlike traditional silica gel breathers, Donaldson Hy-Pro T.R.A.P. breathers utilize a technology that allows the breather to continuously regenerate its water absorbing capacity. This technology allows the breather life to be extended up to 6 months. By reducing the number of change-outs required, money is saved in both parts and labor.



263


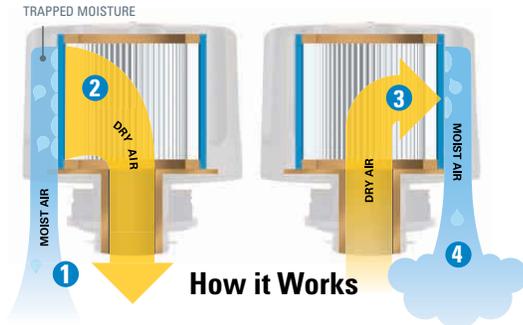


## Self-Regenerating Water Absorbing Capacity.

Atmospheric moisture is a continuous threat to efficient operations of your equipment and machinery. Donaldson Hy-Pro T.R.A.P. Breathers absorb water from the air coming into the reservoir. Air is heated and dried in the warm hydraulic reservoir. As the tank exhales, the dry air strips the moisture from the saturated T.R.A.P. media, regenerating its life.

## Dual contamination prevention.

Each Donaldson Hy-Pro T.R.A.P. Breather is equipped with an internal 3 micron particulate filter along with a proprietary water absorbing media to keep your system both clean and dry. T.R.A.P. Breathers utilize a full pleated media pack to maximize dirt holding capacity and minimize pressure drop.

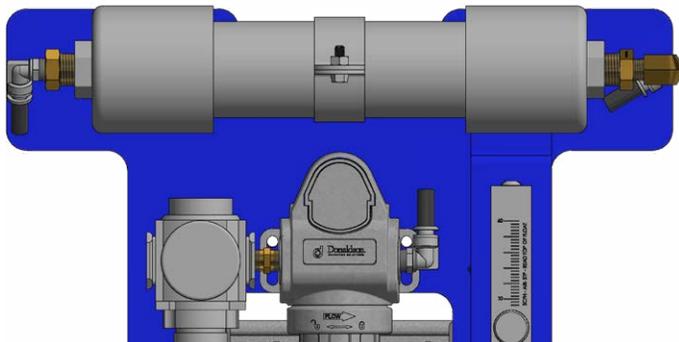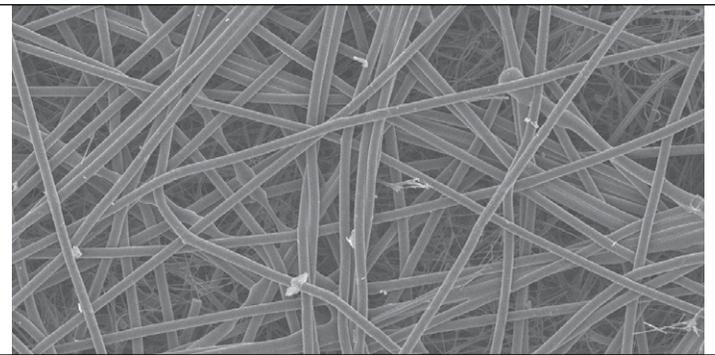

## Complete drying system.

Achieve the ultimate head space drying system when paired with Donaldson Hy-Pro's Head Space Dryer. The combination of the two technologies will eliminate condensation issues in tanks and reservoirs.

## The perfect fit for your system.


T.R.A.P. Breathers come in a variety of sizes, connections, and other options designed for countless applications. Whether you're installing on a small gearbox reservoir or on-board a high vibration mobile application, there's a Donaldson Hy-Pro T.R.A.P. Breather suited perfectly to fit your needs.



## Total Systems Cleanliness

Used in conjunction with more robust particulate filtration, Donaldson Hy-Pro T.R.A.P. Breathers are a pivotal component to achieving Total Systems Cleanliness and ensuring your equipment is protected from all forms of airborne contamination.

# BT Reservoir Adapters

Part Number	Element Connection	Reservoir Connection	Material	Indicator Set Point	Use with Breather	
BT25IK15	3/4" FNPT	3/4" MNPT	Stainless Steel	Indicator Kit Included 20" H2O/5 kPa Trip Point	HPBT25N12-X	
BT45IK15	1" FNPT	1" MNPT	Plastic	Indicator Kit Included 20" H2O/5 kPa Trip Point	HPBT45N16-X	
136501-00520	3/8 - 24 UN		Plastic	20" H2O/5 kPa Trip Point	Replacement Indicator	
P570353	1" FNPT & 1 1/2 -16 UN	Bayonet	Plastic	N/A	HPBT45	


# BT Disposable Cartridge Breathers



Model	HPBT3N4-X	HPBT3N6-X	HPBT25N12-X	HPBT45N16-X	HPBT45N16-DX	HPBT25UNST1.5-DX	HPBT52N32-X
Height	2.21"	2.21"	2.85"	4.57"	4.57"	7.25"	9.72"
	5.6 cm	5.6 cm	7.2 cm	11.6 cm	11.6 cm	18.42 cm	24.68 cm
Diameter	1.65"	1.65"	3.18"	4.5"	4.5"	6.95"	6.95"
	4.2 cm	4.2 cm	8.1 cm	11.4 cm	11.4 cm	17.6 cm	17.6 cm
Connection	1/4" MNPT	3/8" MNPT	3/4" MNPT	1" MNPT	1" MNPT	1.5" UNF female	1.25" BSP
Allowable Tank Connections	1/4" BSPT	3/8" BSPT	3/4" BSPT	1" BSPT	1" BSPT		
	1/4" FNPT	3/8" FNPT	3/4" G	1" G	1" G		
			3/4" FNPT	1" FNPT	1" FNPT		
Airflow	3 cfm	3 cfm	25 cfm	45 cfm	45 cfm	60 cfm	70 cfm
	5 m <sup>3</sup> /h	5 m <sup>3</sup> /h	42 m <sup>3</sup> /h	76 m <sup>3</sup> /h	76 m <sup>3</sup> /h	102 m <sup>3</sup> /h	119 m <sup>3</sup> /h
Reservoir Flow	22 gpm	22 gpm	187 gpm	337 gpm	337 gpm	450 gpm	515 gpm
	85 lpm	85 lpm	708 lpm	1274 lpm	1274 lpm	1699 lpm	1950 lpm
Particulate Efficiency	3μ <sub>(c)</sub> @ 97%						
Material	ABS Plastic	ABS Plastic	Steel E-coated	ABS Plastic	ABS Plastic	Plastic/stainless	Plastic
Indicator	None	None	None	None	Electric LED light	Visual	None

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

TRAPPED MOISTURE

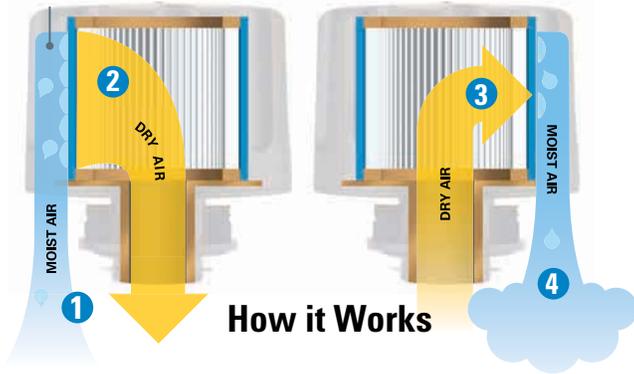


## How it Works

### INTAKE CYCLE (INHALATION)

- 1 The circuit "breathes in" air containing moisture vapor.
- 2 The T.R.A.P. breather strips moisture and particulate from the incoming air, allowing only clean, dry air to enter the circuit.


### OUTFLOW CYCLE (EXHALATION)

- 3 During the "exhalation" cycle, the T.R.A.P. breather allows unrestricted airflow outward.
- 4 The outflow of dry air picks up the moisture collected by the T.R.A.P. breather during intake, and "blows it back out" – fully regenerating the breather's water-holding capacity.

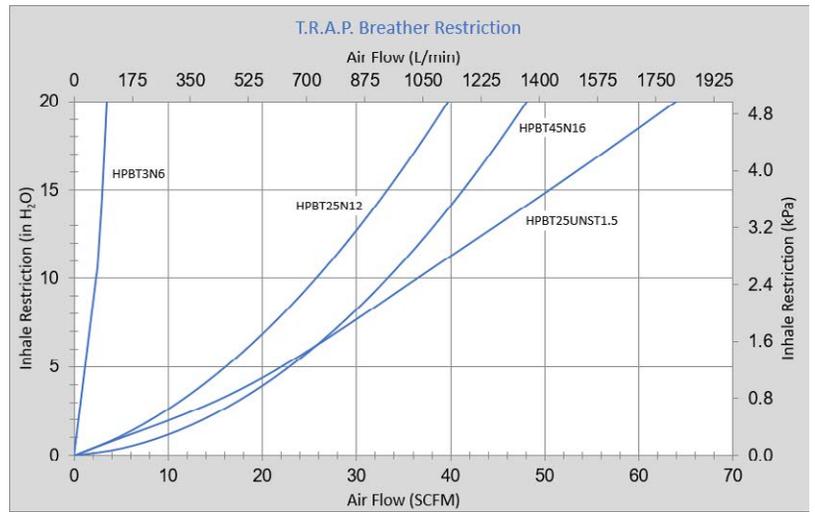


# BT Installation Drawing


HPBT3N4-X

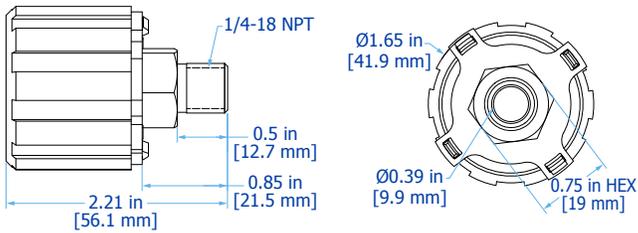


HPBT25UNST1.5-DX

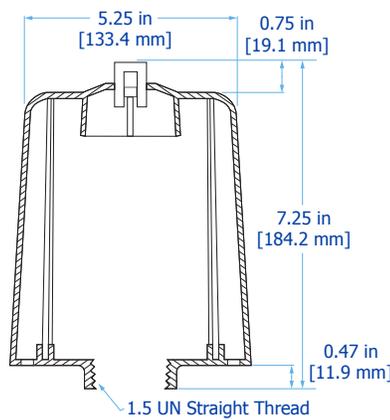


HPBT53N32-X

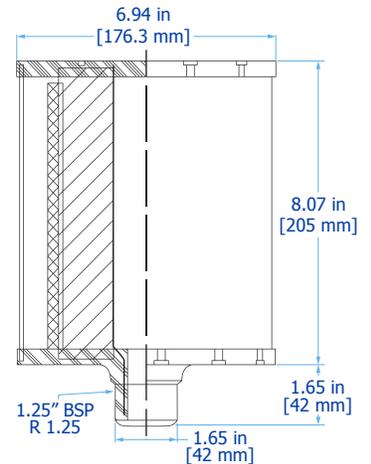


HPBT3N6-X

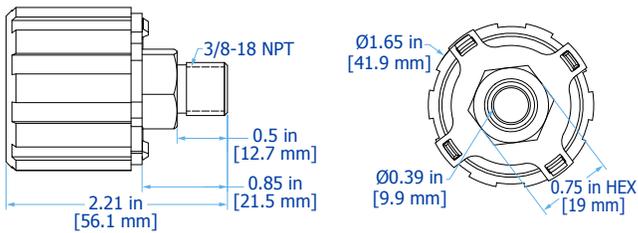


HPBT45N16-X

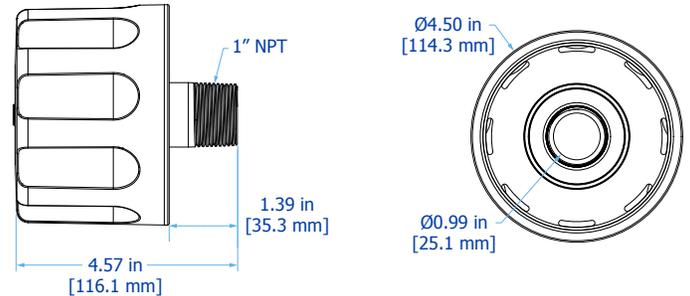

HPBT25N12-X

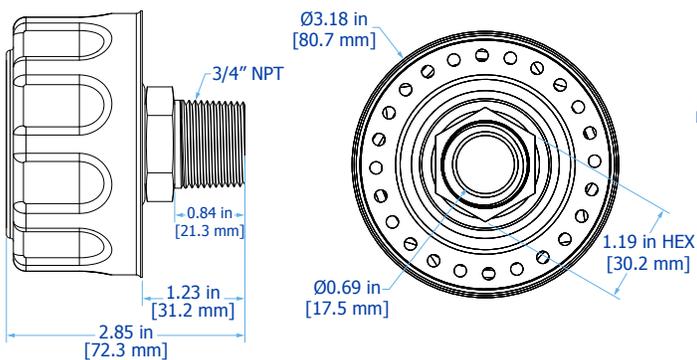

HPBT45N16-DX

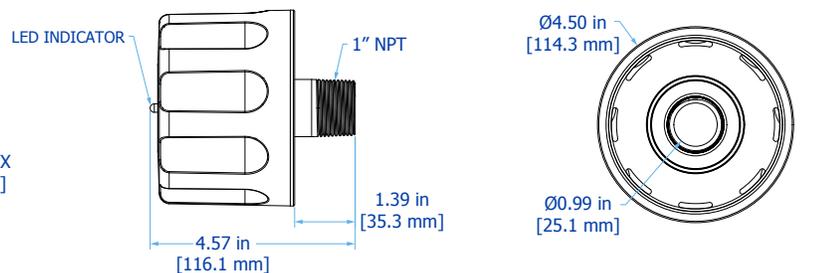

# BF Breathers

## High Flow Particulate Breathers

Control airborne contamination and extend the life of other filters in your system. BF Breathers go beyond ineffective filler/breather caps to protect your system with high capacity, high efficiency pleated glass media elements. Combine with Donaldson Hy-Pro Filter Assemblies and Fluid Conditioning Equipment for the ultimate in Total Systems Cleanliness.

Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)




### Let it breathe.

The same Donaldson Hy-Pro Dualglass you trust to remove particulate from your hydraulic and lube oils pulls double duty in the BF Breathers by removing airborne contamination from incoming air as your reservoir levels change. Designed to withstand the constant flexing of hydraulic systems, Donaldson Hy-Pro filter media is the hands-down best at capturing and preventing contaminants from ever entering your systems.

### Tells the tale of your system.

BF Breathers are equipped with tattle-tale gauges that capture the maximum vacuum level caused by rising and falling fluid levels to let you know exactly how your system is operating. And unlike those nagging kids, you'll be more than grateful for this tattle-tale.

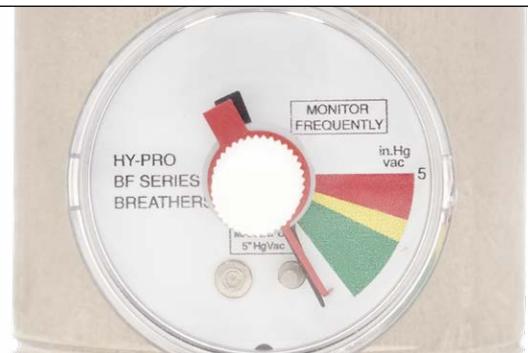

### The perfect fit.


Whether you're operating reservoirs with high cylinder return flows or large extrusion presses, BF Breathers offer the perfect fit for your system. And with numerous standard connections, you can set yours up straight from the box - no adapters required.

# BF Specifications<sup>1</sup>

Model	BF*256	BF*2511	BF*2517	BF*36	BF*311	BF*317
Height	12.4 in	18.1 in	23.7 in	12.4 in	18.1 in	23.7 in
	31.5 cm	46.0 cm	60.2 cm	31.5 cm	46.0 cm	60.2 cm
Diameter	8.9 in	8.9 in	8.9 in	8.9 in	8.9 in	8.9 in
	22.6 cm	22.6 cm	22.6 cm	22.6 cm	22.6 cm	22.6 cm
Weight	21 lb	22 lb	28 lb	25 lb	26 lb	32 lb
	9.5 kg	10.0 kg	12.7 kg	11.3 kg	11.8 kg	14.5 kg
Air Flow	1320 gpm	1450 gpm	1580 gpm	1825 gpm	2100 gpm	2375 gpm
	176 cfm	194 cfm	211 cfm	244 cfm	281 cfm	317 cfm
	4997 lpm	5489 lpm	5981 lpm	6908 lpm	7949 lpm	8990 lpm
Operating Temperature	30°F to 225°F (0°C to 105°C)					
Materials of Construction	<b>Tube Assembly</b> Nickel Plated Carbon Steel		<b>Shell</b> Stainless Steel		<b>Element End Caps + Handle</b> Synthetic – incinerates @ 1100°F (593°C)	

<sup>1</sup>Specifications are approximations taken from base models (Connection options B\*\*/N\*\*) and will vary according to options chosen. Connection option A\*\* dimensions will vary slightly. Contact Donaldson Hy-Pro for exact specifications.

## BF Part Number Builder



Connection	Code	Description
Connection	<b>A2</b>	2" ANSI flange
	<b>A3</b>	3" ANSI flange
	<b>B15</b>	1.5" BSPT
	<b>B2</b>	2" BSPT
	<b>B25</b>	2.5" BSPT
	<b>B3</b>	3" BSPT
	<b>N15</b>	1.5" NPT
	<b>N2</b>	2" NPT
	<b>N25</b>	2.5" NPT
	<b>N3</b>	3" NPT

Length	Code	Description
Length	<b>6</b>	6" (15 cm) nominal length filter
	<b>11</b>	11" (28 cm) nominal length filter
	<b>17</b>	17" (38 cm) nominal length filter

Media Selection	Code	Description
Media Selection	<b>G8 Dualglass</b>	
	<b>1M</b>	0.1μ absolute
	<b>3M</b>	0.3μ absolute
	<b>6M</b>	0.6μ absolute
	<b>10M</b>	1.0μ absolute
	<b>25M</b>	2.5μ absolute

Seals	Code	Description
Seals	<b>B</b>	Nitrile (Buna)
	<b>V</b>	Fluorocarbon
	<b>E-WS</b>	EPR seals + stainless steel support mesh

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# Spin-On Breathers

## G8 Dualglass Particulate Breathers + Adapters

Control solid contaminant ingress with high capacity, high efficiency pleated glass elements. Spin-On Breathers combine ease of installation and adaptability to prevent airborne contamination and extend the life of other filters in your system.



Donaldson.  
HY-PRO™ [hyprofiltration.com/](http://hyprofiltration.com/)



### Contamination Prevention 101.

Fluid contamination is the root cause of most hydraulic system failures and while most systems today utilize oil filters, it is not uncommon for airborne contamination to go overlooked altogether. By preventing airborne contamination ingress, Spin-On Breathers help reduce strain on system filters to extend the life of your fluids and protect your critical components.

### Plug and play.

With common threaded and bayonet style adapters and numerous media options, Spin-On Breathers are a quick way to replace ineffective filler/breather caps right out of the box.



### Total Systems Cleanliness.

Combining Spin-On Breathers with other Donaldson Hy-Pro Fluid Contamination Solutions will yield a clean, healthy, and reliable hydraulic or lubrication system.




# Spin-On Breather Adapters



Adapter Model	ADBB-75	ADBB-76	ADTB-75	ADTB-76	ADTB-76V
Material of Construction	Aluminum	Aluminum	Plated steel	Plated steel	Plated steel
Overall Length	2.58" (65.53 mm)	2.38" (60.45 mm)	3.70" (93.98 mm)	1.75" (44.45 mm)	2.48" (62.99 mm)
Element Thread Length	0.70" (17.78 mm)	0.70" (17.78 mm)	0.50" (12.7 mm)	0.30" (7.62 mm)	0.35" (8.89 mm)
Element Connection	1½" - 16 UN (HP75 series spin-on)	1" - 12 UNF-2A (HP76 series spin-on)	1½" - 16 UN (HP75 series spin-on)	1" - 12 UNF-2A (HP76 series spin-on)	1" - 16 UNF (HP76V series spin-on)
Reservoir Connection	1.87" pin length 1.40" diameter boss	1.87" pin length 1.40" diameter boss	1¼" NPT	¾" NPT	¾" NPT
Seals	Nitrile (Buna)	Nitrile (Buna)	Nitrile (Buna)	Nitrile (Buna)	Nitrile (Buna)

## Spin-On Breather Installation Drawings

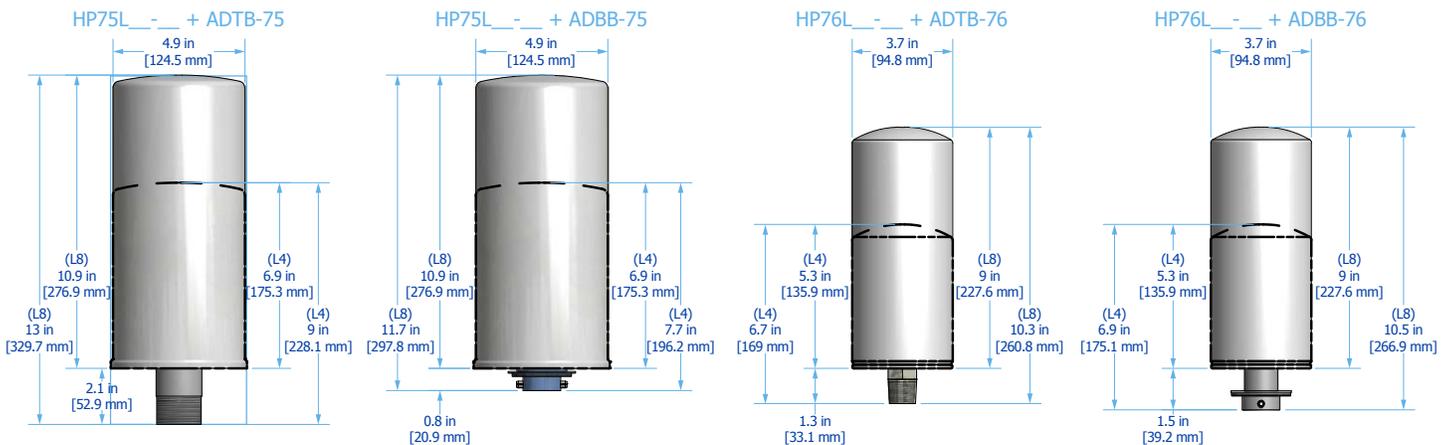

## Spin-On Breather Part Number Builder

**HP**  -  - **B**  
 Flow Rate                      Media Selection

Flow Rate	Media Selection
<b>75L4</b> 290 gpm (1097 lpm), 39 cfm (66 m³/h)	<b>G8 Dualglass</b>
<b>75L8</b> 290 gpm (1097 lpm), 39 cfm (66 m³/h)	
<b>76L4</b> 212 gpm (802 lpm), 28 cfm (47 m³/h)	
<b>76L8</b> 212 gpm (802 lpm), 28 cfm (47 m³/h)	

Media Selection	Media Selection
<b>1M</b> 0.1µ absolute air filtration	<b>G8 Dualglass</b>
<b>3M</b> 0.3µ absolute air filtration	
<b>6M</b> 0.6µ absolute air filtration	
<b>12M</b> 1.0µ absolute air filtration	
<b>25M</b> 2.2µ absolute air filtration	

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PTK1

## Oil Analysis Patch Test Kit

With PTK1, oil cleanliness can be visually analyzed in the field without waiting for lab results and losing control of the analysis process. The PTK1 kit provides the opportunity to see the type, concentration, and actual size of particulate contamination inside the system.

**Donaldson**  
HY-PRO™

hyprofiltration.com/




### Protect your investment and your equipment.

From the sample bottles to the microscope, everything you need for running patch tests on your oil comes neatly packed away in the PTK1 case. Watertight, crushproof, and dust proof, the Pelican™ Protector Case that houses every PTK1 protects your test equipment so whether you're stowing it for flights between plants or working in the dirtiest of environments, your test equipment is safe and ready when you need it.

### See the difference.

With the 100x magnification desktop microscope in every PTK1, examining and monitoring the condition of your oils has never been easier.

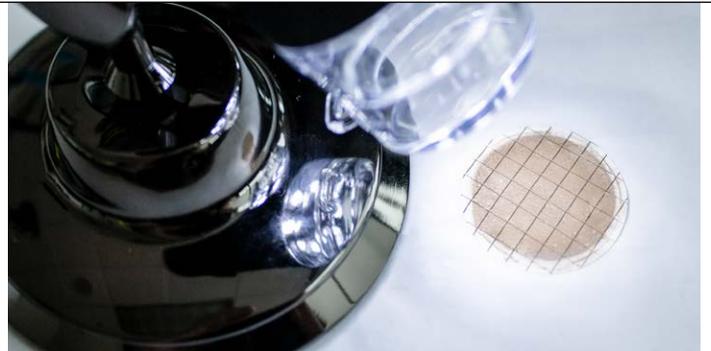

### Trending samples has never been easier.

Included in every PTK1 is a Patch Analysis Card Booklet to document and reference for the approximate ISO codes and types of contamination present in your system. Combined with using Donaldson Hy-Pro filter elements, you'll be amazed as you watch contamination disappear from your fluids, sample after sample.

# PTK1 Specifications

## Complete PTK-1 Kit includes:



100x Magnification, USB operated desktop microscope



Pelican™ 1520 – watertight, crushproof, and dust proof case



1.2µm and 5.0µm filter test patches with patch mounting cards and adhesive covers to protect samples from ambient contamination and to preserve samples for future reference



Forceps for filter patch handling



Vacuum pump to extract fluid samples from the system and process 25 ml sample through filter patch



Machined stainless steel funnel assembly with ml fill line for accuracy



Sample bottles (6)



Solvent dispenser with dispensing filters



Visual correlation chart to determine approximate ISO Cleanliness Code of patch test kit sample



Visual correlation chart to determine type of particles captured on the patch



Patch Analysis Card Booklet

For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# VTK

## On-Site Varnish Test Kits

Condition monitoring is critical in staying ahead of lube oil degradation issues. Varnish Test Kits from Donaldson Hy-Pro provide on-site access to laboratory grade Membrane Patch Colorimetric (MPC) testing as a key piece in predicting potential varnish problems before unit trip or fail-to-start conditions occur, all according to the world recognized ASTM D7843-12 standard for the measurement of insoluble oxidation by-products.



**Donaldson**  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



### Unmistakably easy.

Specifically calibrated for MPC testing according to ASTM D7843-12, the Spectrophotometer in every VTK provides incredible ease of use in colorimetry testing for your fluids with results displayed right on the screen.

### Bring the lab to you.

VTKs put the same equipment used in labs around the world directly at your disposal to give you access to the most accurate varnish potential testing and trending. Everything you need to properly prepare and analyze a filter patch for varnish potential comes included.



### Results before your eyes.

Testing in-house provides the fastest results to understand the status of your fluid. With varnish removal filtration from Donaldson Hy-Pro and VTK on-site testing, you'll be amazed as your fluids become cleaner sample after sample.

# VTK Specifications

Complete Varnish Test Kit includes:

	Spectrophotometer calibrated for MPC $\Delta E$		Bench piston vacuum pump (120V AC, 1P, 60 Hz) or (220V AC, 1P, 50 Hz)
	.45 $\mu$ 47 mm membrane filter patches (100)		Glass filter funnel + filter holder top assembly
	125 ml glass mixing flask (for sample oil & solvent)		Glass filter funnel flask with vacuum pump tube port
	Solvent dispenser with cap, squirt nozzle, and syringe filters (3)		Forceps
	Vacuum pump hose		Instruction manual including details on patch preparation, spectrophotometer operation, sample result interpretation and solutions for lube oil varnish

\*MPC testing should be performed to specifications documented in ASTM D7843-12. For more information or to purchase a report, visit <http://www.astm.org/Standards/D7843.htm>  
For all up to date option details and compatibilites, please reference our Contamination Solutions Price List or contact customer service.

# PM-1

## On-Line ISO Code Particle Monitor

Get fast and accurate ISO cleanliness code readings from your hydraulic and lube oils in real time with the PM-1 Particle Monitor.



[hyprofiltration.com/](http://hyprofiltration.com/)




### Eliminate the guesswork.

Dedicating PM-1 to hydraulic and lube systems can eliminate the need for bottle sampling and let's you know how clean your oil is at all times. PM-1 can be integrated into operating software for constant monitoring and can also be set up to trigger alarms if a system gets too dirty, giving you complete control of your fluids and your systems.

### Unmistakably easy.

As the PM-1 analyzes your fluids, the on-screen counts update in real time to show you the ISO cleanliness codes for the 4 $\mu$ , 6 $\mu$ , 14 $\mu$  and 21 $\mu$  channels in incredible clear and easy to read figures.

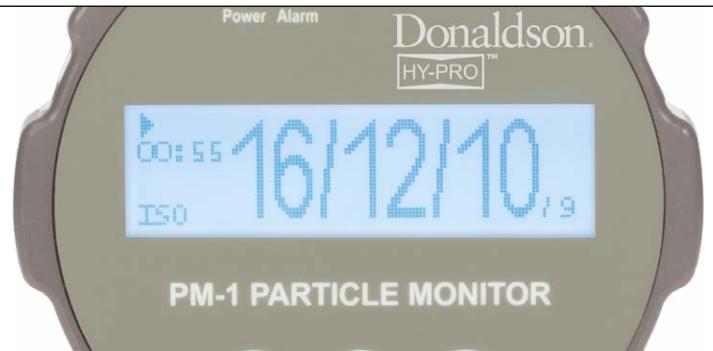

### Perfectly integrated.

Add the PM-1 to almost any Donaldson Hy-Pro Filtration System with Special Option code "O" (where applicable) to get real time ISO Codes integrated directly on your filtration and always know exactly how clean your hydraulic and lube oils are.

# PM-1 Specifications

Display	The device is calibrated to ISO 11943. It calculates and displays results according to ISO 4406:2021, SAE AS 4059, NAS 1638 und GOST 17216.		
Voltage	9-33 V dc		
Operating Pressure	Up to 6,090 psi (420 bar) dynamic		
Protection Class	IP67		
Flow Rate	50-400 ml/min (required for operation)		
Fluid Connection	M16 x 2.0 (Minimess®)		
Electric Connection	M12 x 1 (8 Pole)		
Data Memory	On-board 4MB storage capacity		
Fluid Compatibility	Mineral oils, phosphate esters and specified synthetics (Skydrol by special option only). Not for use with water glycol or other water based fluids. Water levels above saturation in any fluids will cause the PM-1 to malfunction.		
Temperature Range	<b>Oil</b> 14°F to 176°F (-10°C to 80°C)	<b>Air</b> 14°F to 176°F (-10°C to 80°C)	<b>Storage</b> -4°F to 176°F (-20°C to 80°C)
Interface	RS-232, analog output 4-20 mA configurable, digital alarm output, digital input to start and stop readings		
Ordering Information	<b>PM-1</b>	PM-1 Particle Monitor	
	<b>PM-1-PWRSUP-60<sup>1</sup></b>	PM-1 electrical power supply for portable use (120V AC, 1P, 60 Hz to 24 V dc)	
	<b>PM-1-PWRSUP-50<sup>1</sup></b>	PM-1 electrical power supply for portable use (220V AC, 1P, 50 Hz to 24 V dc)	
	<b>PM-1-PWRCAB</b>	PM-1 9-33 V power cable with M-12 x 1 (8 pole) connection 15' (5 m) power cable plus 1 x 8 pole connection for PM-1	
	<b>PM-1-HKIT-60</b>	Portability kit for PM-1. Includes: Pelican™ case, sampling hoses for high pressure Minimess® & low pressure lube application adapters, outlet line flow control attachment, PM-1-PWRSUP-60 power supply (60 Hz) and PM-1-DAT data/power adapter.	
	<b>PM-1-HKIT-50</b>	Portability kit for PM-1. Includes: Pelican™ case, sampling hoses for high pressure Minimess® & low pressure lube application adapters, outlet line flow control attachment, PM-1-PWRSUP-50 power supply (50 Hz) and PM-1-DAT data/power adapter.	
	<b>PM-1-BR</b>	PM-1 back mounting bracket with rubber vibration suppression	
	<b>PM-1-USB</b>	USB adapter – RS-232 serial	
	<b>PM-1-DAT<sup>1</sup></b>	15' (5 m) data cable with open ends	
	<b>PM-1-FITLOW</b>	Low pressure lube system fittings to replace standard Minimess® inlet & outlet connections. <sup>2</sup> Suitable for low pressure systems < 29 psi (2 bar) where achieving minimum flow index 50,000 reading (50 ml/min) is not possible.	
	<b>PM-1-SC<sup>3</sup></b>	PM-1 Soft Calibration	
<b>PM-1-HC<sup>3</sup></b>	PM-1 Hard Calibration		

<sup>1</sup>For PM-1 portable counting you must purchase the PM-1-DAT AND either the PM-1-PWRSUP-60 (for 60 Hz) or the PM-1-PWRSUP-50 (50 Hz) to power the unit. The unit cannot be powered with just the PM-1-PWRSUP-60 or -50. The PM-1-DAT allows for connection to RS232 data port for data acquisition and download.

<sup>2</sup>Minimess® is a registered trademark of Hydrotechnik GMBH.

<sup>3</sup>It is recommended that the unit receives a soft calibration every 2 years of service to ensure the unit is still operating as intended.

If soft calibration indicates the unit is not functioning properly, a hard calibration should be performed.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# PFM75

## Portable Fluid Monitor

Designed as a mobile on-line laboratory to measure particulate, water, and overall oil health, the PFM75 is an easy and cost effective way to track oil condition and optimize the efficiency of your hydraulic and lube assets. Take control of your oil analysis with the PFM75 to eliminate bottle sampling error and to get your results in real time without having to wait for the lab.



Donaldson.  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Small size, huge results.

Portability is the first priority when you have to track the condition of all your plant's oils. That's why the PFM75 is designed to pair unmatched portability with comprehensive condition monitoring, all in a rugged package. Lightweight and easy to use, the PFM75 will revolutionize the way you track your oil cleanliness.

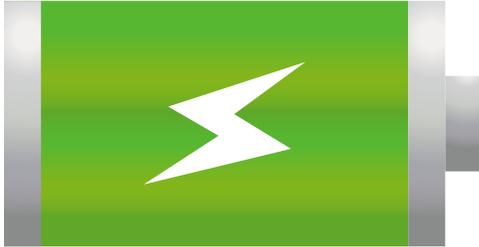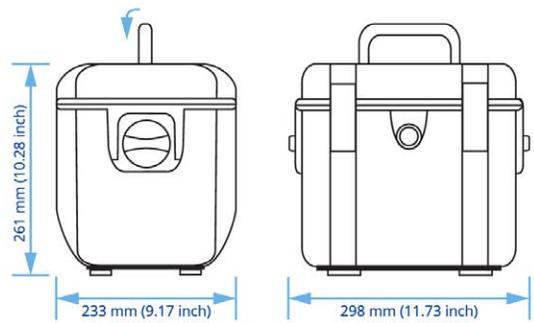

## Powerful data. All day long.

Capable of providing measurements for more than 24 hours on a single charge when running without the pump, the PFM75 provides powerful insight into your fluid condition without the need to be tied down by power cords. And when it is time to recharge, you'll be back up and running in less than an hour.

## Measurements on your time.

Sampling with the PFM75 can be carried out directly via a pressure line or the integrated pump to measure your oil condition quickly and easily. The integrated real-time clock adds a time stamp to all measured data which can also be marked with a freely definable measuring point indicator to make cataloging, tracking and trending your data easier than ever.



## Results in front of your eyes.

For immediate results, the PFM75's integrated printer delivers all of your oil information with the push of a button. Internal data storage also allows for saving more than 1,250 data records which can easily be transferred for processing via the included USB-B adapter or SD card. You can even choose which measurement standard (ISO, SAE, NAS, & GOST) to quantify to make your data more accessible than ever.



## Poor sampling port location? No problem.

In our experience, 90% of OEM sample port locations don't stand up to sampling best practices. Pair your PFM75 with Donaldson Hy-Pro's integrated sample port fittings and proper sampling techniques to provide best practice sampling and get the most accurate data for trending your oil condition time and time again.



## Monitor on the move.

Supplied with everything you need to hit the ground running, the PFM75 is the perfect solution for monitoring your fluid conditions when and where you need it. To make it even easier, the power supply, hoses, couplings, and monitor all fit conveniently in the included accessory bag.

# PFM75 Specifications

Operating Pressure	<b>High Pressure Connection<sup>1</sup></b> 73 - 4640 psi (5 - 320 bar)	<b>With Pump Operation</b> 0 psi (0 bar)		
Fluid Viscosity Range <sup>2</sup>	5 - 1000 cSt			
Operating Conditions	<b>Fluid Temperature</b> 32°F to 140°F (0°C to 60°C)	<b>Ambient Temperature</b> 14°F to 176°F (-10°C to 80°C)	<b>Relative Humidity</b> 0%-95% r.H. (non-condensing)	
Fluid Compatibility	Mineral oils (H, HL, HLP, HLPD, HVLP), synthetic esters (HETG, HEPG, HEES, HEPR), polyalkyleneglycols (PAG), zinc and ash-free oils (ZAF), polyalphaolefins (PAO)			
Wetted Materials	Chrome, aluminum, stainless steel, Viton, steel, brass, HNBR, NBR, polyurethane resin, epoxy resin, chemical nickel/gold (ENIG), soldering tin (Sn96, 5Ag3CuO, 5NiGe), aluminum oxide, glass (DuPont QQ550), gold, silver-palladium, sapphire, PVC (hoses)			
Device Power Supply	<b>Power Supply</b> 24 V dc	<b>Power Consumption</b> Max 8 A		
Power Adapter Power Supply	<b>Power Supply</b> 100 - 240 V ac (50/60 Hz). European and US plugs included	<b>Power Consumption</b> Max 4 A	<b>Power at 24 V dc - Output</b> Max 221 W	
Battery	<b>Nominal Capacity</b> 7500 mAh	<b>Loading Time</b> <1 h	<b>Running Time When Measuring Without Pump</b> >24 h	
Display Particle Measurement	<b>ISO 4406:2021</b> 0 - 28 (calibrated area 10 - 22)	<b>SAE AS 4059E</b> 000 - 12	<b>NAS 1638 (based)<sup>3</sup></b> 00 - 12	<b>GOST 17216 (based)<sup>3</sup></b> 00 - 17
	<b>Size Channels</b> 4 $\mu$ m <sub>(C)</sub> , 6 $\mu$ m <sub>(C)</sub> , 14 $\mu$ m <sub>(C)</sub> , 21 $\mu$ m <sub>(C)</sub>			
Measuring Range Oil Parameter	<b>Relative Permittivity</b> 1 - 7	<b>Relative Humidity</b> 0 - 100%	<b>Conductivity</b> 100 - 800,000 pS/m	<b>Temperature</b> -4°F to 248°F (-20°C to 120°C)
Measuring Accuracy	<b>Particle Measurement (within calibr. range)</b> <b>ISO 4 / ISO 6</b> ±1	<b>Particle Measurement (within calibr. range)</b> <b>ISO 14 / ISO 21</b> ±2	<b>Relative Dielectric Number<sup>4</sup></b> ±0.015	<b>Relative Humidity (10-90%)<sup>5</sup></b> ±3% r.H.
	<b>Relative Humidity (&lt;10,&gt;90%)<sup>5</sup></b> ±5% r.H.	<b>Conductivity (100 - 2000 pS/m)</b> ±200 pS/m	<b>Conductivity (2000 - 800,000 pS/m)</b> Typ. <10%	<b>Temperature</b> ±2 K
Interfaces	USB-B, SD-card (SD or SD-HC in FAT/FAT16/FAT32-data format)			
Internal Data Memory	1250 readings (with time stamp)			

<sup>1</sup>Depending on the oil viscosity.

<sup>2</sup>Depending on the permissible operating pressure.

<sup>3</sup>From software version 1.70.15 upwards.

<sup>4</sup>Calibrated to n-Pentan at 77°F (25°C).

<sup>5</sup>Calibrated to air at room temperature.

# PFM75 Reference Guide



## Ordering Information

	Part Number	Description
Base Package	<b>PFM75</b>	PFM75 Portable Fluid Monitor unit with operating manual, power supply (100-240 V), power cable with both European and non-European plugs, low-pressure hose set including connection couplings, high-pressure hose, SD memory card, and carrier bag for PFM75 and accessories.
Spare Parts	<b>PFM75SP-0001</b>	Set of covers for SD and USB ports
	<b>PFM75SP-0002</b>	Hose set with couplings
	<b>PFM75SP-0003</b>	Minimesse® cable with 6.6 ft (2 m) M16 x 2
	<b>PFM75SP-0004</b>	Paper rolls for thermal printer
	<b>PFM75SP-0005</b>	Power supply
	<b>PFM75SP-0006</b>	Power cable
	<b>PFM75SP-0007</b>	Protection caps (2)
	<b>PFM75SP-0008</b>	Suction connection
	<b>PFM75SP-0009</b>	Protective strainer
	<b>PFM75-SC</b>	Soft Calibration

Minimesse® is a registered trademark of Hydrotechnik GMBH.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

# Integrated Sample Port Fittings

Upgrade Existing Lines with Integrated Sample Ports for Best Practice Sampling

Donaldson  
HY-PRO™

[hyprofiltration.com/](http://hyprofiltration.com/)



## Best practice sampling.

Every sample port fitting comes assembled straight from the factory to ensure best practice samples are easier than ever. The fittings are set up to pull fluids directly from the center of flow through the angle cut pitot tube, providing consistently accurate readings.




## Easy integration.

Designed to be integrated into existing lines with incredible ease, the Donaldson Hy-Pro Sample Port Fittings provide access to hydraulic and lube oil sampling where previously thought impossible.

## Unmistakably accurate.

The down tube on each sample port fitting is laser etched to clearly indicate the position of the angle cut on the tube. Ensuring correct alignment and flow direction is easier than ever and with proper sampling procedure, you'll be pulling consistently accurate samples every time.

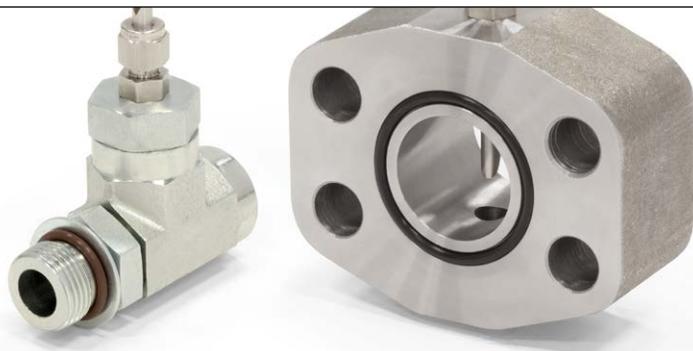

## Flange or straight thread options.

Accurate and trend-able oil analysis has never been easier. Simply decouple the connection, add in your new fitting and reconnect, then get to work properly trending your fluid cleanliness. And with numerous connection types and sizes, there's a sample port fitting available for all of your applications.

## Add-On kit

For applications with existing ports in place, the Add-On configuration delivers a seamless addition without the need to hassle with plumbing. Configured with the exact length and adapter for your existing pipe and port setup, the Add-On is the easiest way to make proper sampling a part of your maintenance plan.




## Sample port options


Sample port valves come in a variety of options to fit your preferences and system requirements. From low pressure ball valves suitable for high viscosity/low pressure lube apps to Minimes® for high pressure hydraulics, you'll get the perfect solution no matter your application.

# Installation's never been easier.


Step 1: Locate the connection in which to install your sample port fitting.

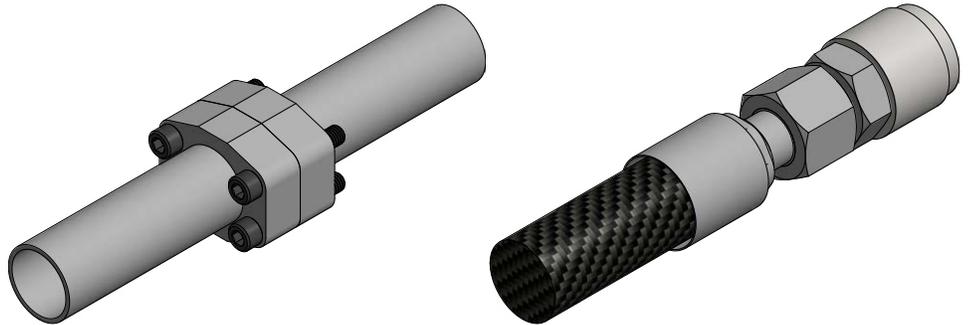


Step 2: Decouple the connection.

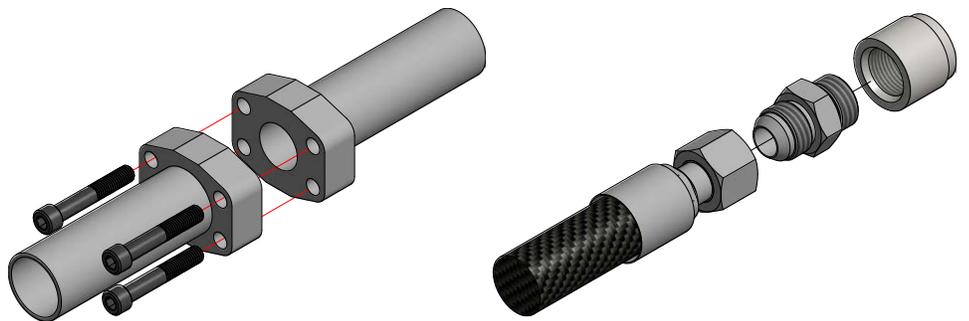

Step 3: Insert Sample Port Fitting into connection using extended bolts (Sandwich Plate models) or existing adapters (T-Fitting models).

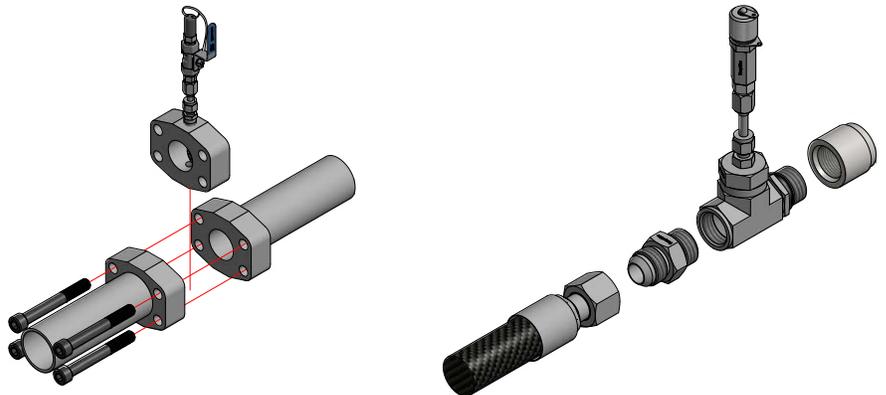

Step 4: Reconnect and tighten all fittings and hardware.

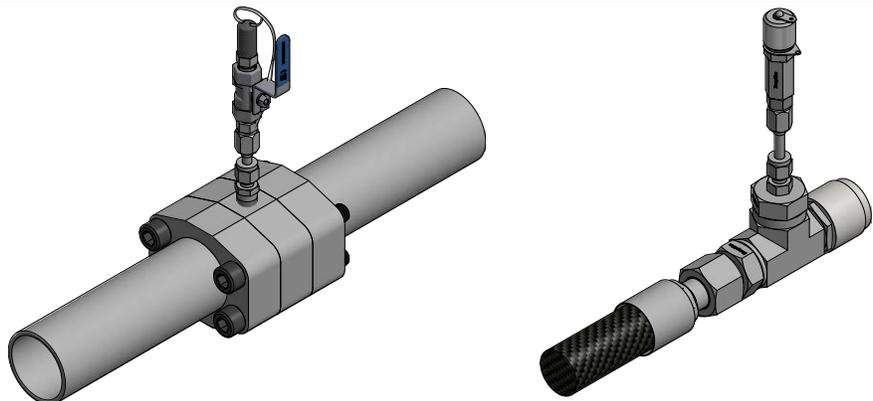

# Reference Guide

## Add-On Kit

### FTG-SAM-ASN6-FN12B-32-0

Swivel 90 with 6" (15 cm) nylon hose

1/4" ball valve with powder coated handle

Laser engraved alignment arrow

Adapter for installation to existing port

Angle cut pitot tube aligned to center of existing pipe



### FTG-SAM-SUBV-F24B

1/4" MJIC sample connection with dust cap

1/4" ball valve with plastic coated handle

Dust cap retention chain

Laser engraved alignment arrow

Code 61 sandwich plate

Nitrile (Buna) o-ring installed

Angle cut pitot tube aligned to center of port



### FTG-SAM-TTP-S16V

Minimess® Test Point with dust cap

Dust cap retention chain

Laser engraved alignment arrow

Angle cut pitot tube aligned to center of port (not visible)

Fluorocarbon o-ring installed

Threaded fitting for installation




#### Not pictured:

Extended bolts: hardware supplied to be Grade 8, equivalent, or higher.




# Part Number Builder

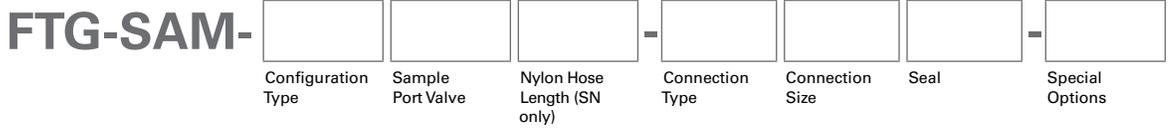

<b>Configuration Type</b>	<b>SM</b>	Sandwich plate with Metric bolts included (Grade 8, equivalent, or higher fasteners supplied)
	<b>SU</b>	Sandwich plate with US standard/Imperial bolts included (Grade 8, equivalent, or higher fasteners supplied)
	<b>T</b>	In-line "T" fitting

Sample Port Valve	Description	Operating Pressure
<b>BV</b>	1/4" Ball valve with 1/4" MJIC	< 450 psi (31 bar)
<b>SN</b>	sample port and dust cap	< 450 psi (31 bar)
<b>TP</b>	1/4" Ball valve with Swivel 90 and nylon hose Minimesse® Test Point	≥ 450 psi (31 bar)

Nylon Hose Length SN sample valve only	omit	BV or TP Sample Valves		
<b>6</b>		6 in (15.2 cm)	<b>22</b>	22 in (55.9 cm)
<b>8</b>		8 in (20.3 cm)	<b>24</b>	24 in (61 cm)
<b>10</b>		10 in (25.4 cm)	<b>26</b>	26 in (66 cm)
<b>12</b>		12 in (30.5 cm)	<b>28</b>	28 in (71.1 cm)
<b>14</b>		14 in (35.6 cm)	<b>30</b>	30 in (76.2 cm)
<b>16</b>		16 in (40.6 cm)	<b>32</b>	32 in (81.3 cm)
<b>18</b>		18 in (45.7 cm)	<b>34</b>	34 in (86.4 cm)
<b>20</b>		20 in (50.8 cm)	<b>36</b>	36 in (91.4 cm)

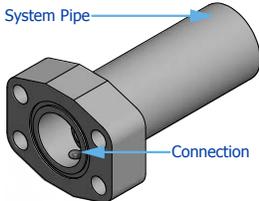Connection Type	"SM" + "SU" Configurations	"T" Configuration
	<b>A</b> ANSI flange <b>C</b> Code 62 flange <b>F</b> Code 61 flange	

Connection Size		
<b>4</b>	1/4"	
<b>8</b>	1/2"	
<b>12</b>	3/4"	
<b>16</b>	1"	
<b>20</b>	1 1/4"	
<b>24</b>	1 1/2"	
<b>32</b>	2"	

Seal		
<b>B</b>	Nitrile (Buna)	
<b>E</b>	EPR	
<b>V</b>	Fluorocarbon	

Special Options		
<b>S</b>	Stainless steel	
<b>T1</b>	1/4" T fitting with gauge port + isolation ball valve	
<b>T2</b>	1/4" T fitting with gauge port and transducer connection + isolation ball valves	

Minimesse® is a registered trademark of Hydrotechnik GMBH.

# VUD Questionnaire

---

<b>Name</b>	<b>Phone</b>
<b>Position</b>	<b>Email</b>
<b>Company</b>	<b>Fax</b>
<b>Address</b>	

---

## System Questions

---

**Oil Characteristics**

---

**ISO Cleanliness**

---

**Water Content (PPM)**

---

**Water Ingress**

---

**Current Unit**

---

**Why Change?**

---

**Objective in hours (High PPM to Target PPM)**

---

## Location Questions

---

**Temperature**

---

**Utility Services Available**

---

**General Environment (i.e. dry, wet, dust, etc)**

---

**Explosion Proof Requirement?**

---

**Unit**

---

**Plant Application (i.e. turbine, paper mill, etc)**

---

## Information & Respond

---

**Reply Required (in days)**

---

**Customer Objectives**

---

# Filter Application Data Sheet

287

<b>Name</b>		<b>Company</b>	
<b>Phone</b>		<b>Email</b>	
<b>Mobile</b>		<b>Fax</b>	
<b>System Description</b>			
<b>Critical System Components</b>			
<b>Filter Location (pressure, return, etc)</b>			
<b>Existing System Filtration (location, micron rating)</b>			
<b>Fluid Information</b>		<b>Manufacturer/Tradename:</b>	
		<b>ISO VG:</b>	<b>S.G.:</b>
		<b>Viscosity cSt:</b>	<b>Viscosity SUS:</b>
		<b>Emulsion Mix:</b>	<b>Water Content (PPM):</b>
<b>Operating Temperature Range</b>	<b>From:</b>	<b>To:</b>	<input type="checkbox"/> °F <input type="checkbox"/> °C
<b>Cold Start Temperature</b>	<input type="checkbox"/> °F <input type="checkbox"/> °C	<b>Time Interval to Operating Temp:</b>	
<b>Contaminant Ingression Rate &amp; Description (coal mill, paper mill)</b>	<input type="checkbox"/> Low	<input type="checkbox"/> Medium	<input type="checkbox"/> Severe
<b>Contaminant (wear metal, gel, etc)</b>			
<b>Maximum Clean Element ΔP</b>	<input type="checkbox"/> PSID	<input type="checkbox"/> BARD	(Typically 15-30% indicator trip setting)
<b>Maximum Loaded Element ΔP</b>	<input type="checkbox"/> PSID	<input type="checkbox"/> BARD	(dependent on bypass valve setting)
<b>Element Change Interval</b>			
<b>Target ISO Cleanliness Code (per ISO4409:1999, 4/6/14)</b>			
<b>System Pressure</b>	<b>Normal:</b>	<b>Maximum:</b>	<input type="checkbox"/> PSID <input type="checkbox"/> BARD
<b>Pump Flow Rate</b>	<b>Normal:</b>	<b>Maximum:</b>	<input type="checkbox"/> GPM <input type="checkbox"/> LPM
<b>Return Flow Rate</b>	<b>Normal:</b>	<b>Maximum:</b>	<input type="checkbox"/> GPM <input type="checkbox"/> LPM
<b>Seal Material</b>	<input type="checkbox"/> Nitrile (Buna)	<input type="checkbox"/> Viton	<input type="checkbox"/> EPR <input type="checkbox"/> Silicone <input type="checkbox"/> Other:
<b>Bypass Valve</b>	<input type="checkbox"/> None	<input type="checkbox"/> 3 psi (0.21 bar)	<input type="checkbox"/> 5 psi (0.34 bar) <input type="checkbox"/> 15 psi (1.03 bar) <input type="checkbox"/> 25 psi (1.72 bar) <input type="checkbox"/> 50 psi (3.45 bar) <input type="checkbox"/> 102 psi (7.0 bar)
<b>Differential Pressure Indicator</b>	<input type="checkbox"/> Visual Pop-Up	<input type="checkbox"/> Electrical	<input type="checkbox"/> Visual + Electrical <input type="checkbox"/> ΔP Gauge <input type="checkbox"/> ΔP Gauge + Electrical <input type="checkbox"/> None
<b>Mounting Arrangement (bowl down, top loading, etc)</b>			
<b>Port Configuration (in-line 180°, 90°, dual inlet, etc)</b>			
<b>Other Requirements (duplex, reverse flow, bi-directional, etc)</b>			
<b>Space Restrictions (overhead)</b>			
<b>Quantity and Required Delivery</b>			
<b>Notes:</b>			



# Non-Standard Filter Element Worksheet

Name		Company	
Phone		Email	
Part Number		Element OEM	
Element Style*		(Select from grid pg.2) Temperature Range	
Collapse Rating		(psid/bar) Fluid Type + Name + Grade	
Quantity Required		Estimated Annual Usage	
End Cap Material	<input type="checkbox"/> Plated Steel	<input type="checkbox"/> Stainless Steel	<input type="checkbox"/> Plastic Molded <input type="checkbox"/> Aluminum
Support Tube	<input type="checkbox"/> No-coreless	<input type="checkbox"/> Inner Only	<input type="checkbox"/> Outer Only <input type="checkbox"/> Inner + Outer
Bypass Valve	<input type="checkbox"/> Yes	<input type="checkbox"/> No	Bypass Setting (psid/bar)
Media Type	<input type="checkbox"/> Cellulose	<input type="checkbox"/> Glass	<input type="checkbox"/> Wire Mesh <input type="checkbox"/> Stainless Fiber
Media Rating	(nominal, absolute, $\beta_x = ?$ , $\beta_{x_{cl}} = ?$ )		
Seal Location	<input type="checkbox"/> None	<input type="checkbox"/> Single End	<input type="checkbox"/> Double End
Seal Type	<input type="checkbox"/> Captured O-Ring	<input type="checkbox"/> Male O-Ring	<input type="checkbox"/> Flat Gasket <input type="checkbox"/> Grommet
Seal Material	<input type="checkbox"/> Buna	<input type="checkbox"/> Viton	<input type="checkbox"/> EPR <input type="checkbox"/> Silicone <input type="checkbox"/> Neoprene
Flow Direction	<input type="checkbox"/> In to Out	<input type="checkbox"/> Out to In	
Additional Components Required			(Spring, Seals, Etc.)

**Dimensions**

Dimension boxes H, I, L have been left blank for use in a sketch or other features that need to be added to the drawing. When measuring for dimensions E and F (o-ring touch-off) be sure that the o-ring is still installed and that the caliper blade makes only very light contact with the o-ring. Do not apply pressure to the o-ring. With captured o-ring seal end caps the B or D dimension will typically be smaller than the A or C dimension respectively.

inches  cm

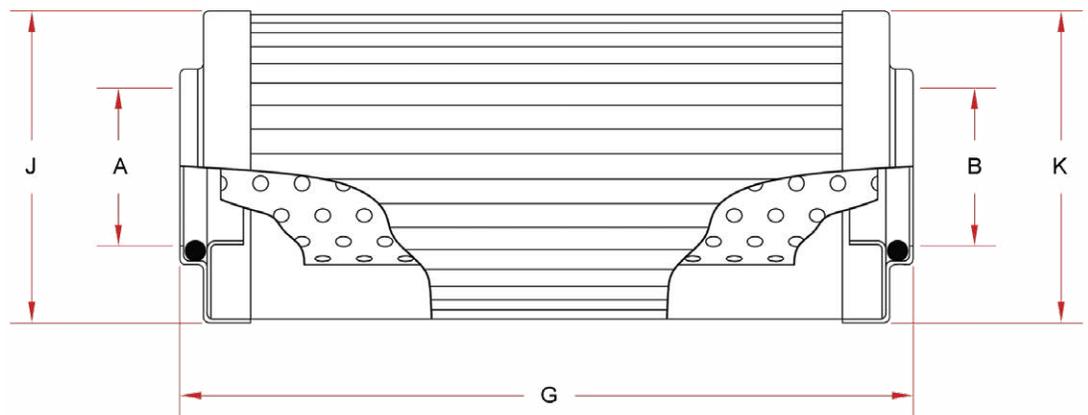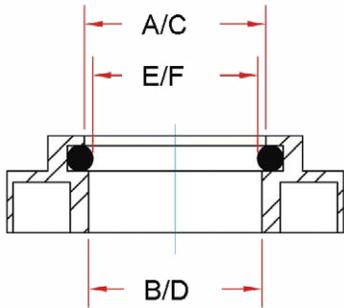

A (id1):	E (ort1):	I:
B (id1a):	F (ort2):	J (od1):
C (id2):	G (oal):	K (od2):
D (id2a):	H:	L:

\*If your element style is not on the grid (see page 2), please send a sketch and/or digital photos

# Non-Standard Filter Element Worksheet





1

2





3

4




A

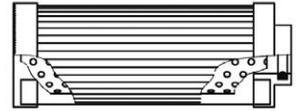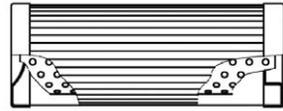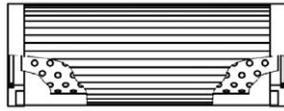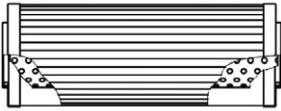





B

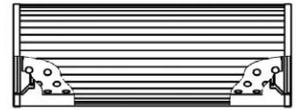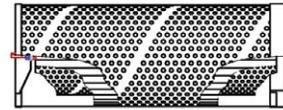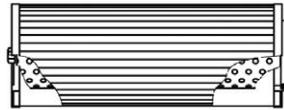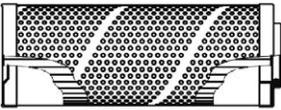





C

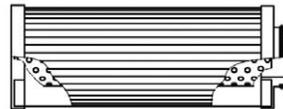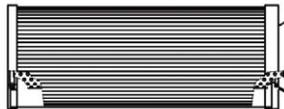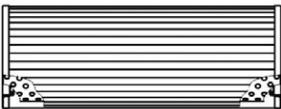





D

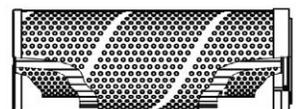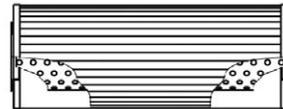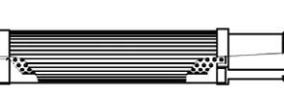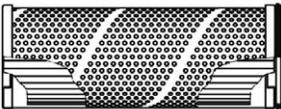





E

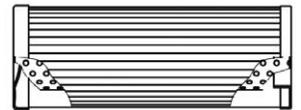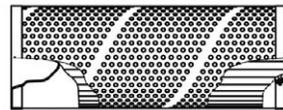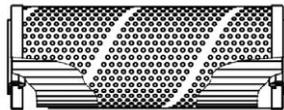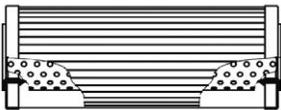




F

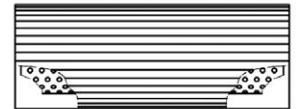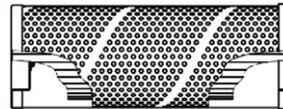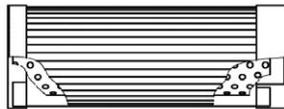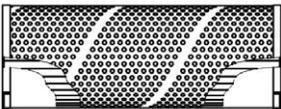




G

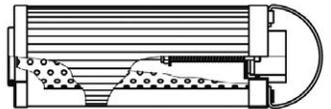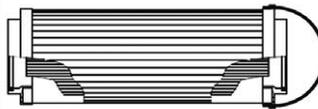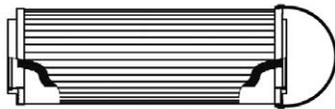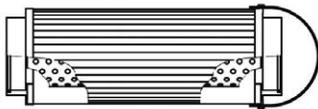

H

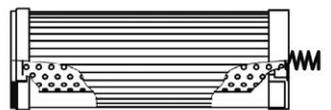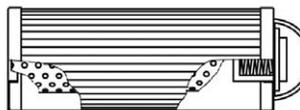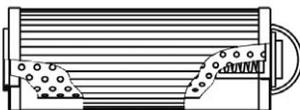

I

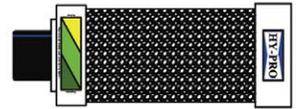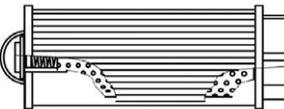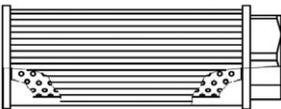



# Donaldson Company, Inc. General Terms and Conditions of Sale

- 1. Offer, Governing Provisions, Amendment & Revocation:** This document ("Terms") is an offer or counter-offer by Donaldson Company, Inc. or one of its affiliates (hereinafter referred to as "Seller"), as identified on the applicable quote, order acknowledgement, invoice or other sales document ("Sales Document"), to sell the goods and/or services to the named Buyer on the Sales Document ("Buyer") solely in accordance with these Terms and any signed agreement between Seller and Buyer. This is not an acceptance of any offer made by Buyer, even if received elsewhere by a salesperson, selling agent or representative of Seller. This sale is expressly conditioned upon Buyer's assent solely to the Terms. Each order from Buyer shall be deemed to be an offer by Buyer to purchase the goods and/or services solely pursuant to these Terms. Acceptance, either by acknowledgment, shipment of goods or commencement of services, of any order does not constitute acceptance by Seller of any of the terms or conditions of those orders or of any request for quotation, except as to identification and quantity of goods/ services. Seller objects to any additional or different terms contained in any order, request for quote or other communication provided by Buyer. No additional or different terms or conditions will be of any force or effect. Seller may revoke its offer at any time before it is accepted by Buyer. The terms contained in or incorporated into these Terms by reference, including the Sales Documents, any product disclaimer, important product notice, product-specific warranty statement and Seller's quotation or proposal comprise the entire agreement between Seller and Buyer on the subject of the transactions described herein and there are no conditions to that agreement that are not so contained or incorporated, except that any confidentiality/non-disclosure agreement executed by the parties shall remain in effect according to its terms. Oral representations are specifically excluded from and overridden by the Terms. No accepted offer may be altered by Buyer and no changes to this document can be made except in writing signed by Seller's authorized representative. Notwithstanding anything herein to the contrary, if a written contract signed by both parties exists covering the sale of the goods and/or services, the terms and conditions of such contract shall prevail to the extent they are inconsistent with these Terms.
- 2. Services:** Buyer shall (i) cooperate with Seller in all matters relating to the services and provide access to Buyer's premises and other facilities as Seller reasonably requests; (ii) respond promptly to Seller requests for direction, information, approvals, authorizations or decisions that are reasonably necessary for Seller to perform services in accordance with the requirements of the Terms; (iii) provide such materials or information as Seller requests to carry out the services in a timely manner and ensure that Buyer-supplied materials, equipment or information are complete and accurate in all material respects; (iv) obtain and maintain all necessary permits, approvals, licenses and consents necessary for the services; and (v) comply with all applicable laws in relation to services before the start date.
- 3. Order Acceptance & Governing Law:** No order is binding on Seller until accepted and acknowledged in writing by Seller, which acceptance shall be delivered by mail or electronic communication. Orders may be held or cancelled at Seller's discretion where local law allows. These Terms shall be governed by and construed according to the laws of the jurisdiction where the main office of the Seller entity is located ("Jurisdiction"), without reference to its principles of conflicts of laws. Any legal suit, action or proceeding arising out of or relating to the Terms shall be instituted in the appropriate courts located in the Jurisdiction and each party irrevocably submits to the exclusive jurisdiction of such courts in any such suit, action or proceeding. The rights and obligations of the parties shall not be governed by the 1980 United Nations Convention for the International Sale of Goods.
- 4. Shipment, Delivery & Risk of Loss:** Unless otherwise agreed in writing by Seller, title to goods and all risk of loss or damage thereto shall pass to and be borne by Buyer FCA (Incoterms® 2020) Seller's point of manufacture or distribution facility. Buyer's purchase order must specify a preferred carrier; otherwise, goods will be shipped by Seller on a Prepaid and Add basis notwithstanding the FCA delivery terms. A handling charge will be added to all freight charges to compensate Seller for preparing and shipping the goods when Seller arranges for shipment on a Prepaid and Add basis. Delivery of the

goods to a carrier at Seller's point of shipment shall constitute delivery. Buyer is responsible for all freight, sales and other taxes, customs duties, insurance costs and other expenses relating to the shipment of the goods. In the event of a dispute regarding the delivery, quantity or quality of the goods or services, the burden of proving the goods or services were not delivered or that the quantity or quality thereof was not in accordance with the order, shall rest with the Buyer. Seller recommends that Buyer insures its goods while in transit. Buyer is responsible for all costs, reporting, and compliance with export control laws related to the goods' export in the event the purchase order has specified a preferred carrier; this shall constitute a routed export transaction and applicable country-specific regulations will apply. If Seller's carrier is used, then Buyer must notify Seller, within ten (10) days after Seller's delivery of the applicable goods to the carrier, of any claim that goods were lost or damaged in shipment, and any claim not so made is waived. Seller will cooperate with Buyer in Buyer's claims against the carrier for lost or damaged goods. Buyer shall make claims for loss or damage to goods while in transit against the carrier. Additional charges will be incurred by Buyer for special processing for export orders and drop shipments outside of country of manufacture. Seller will not make any "drop shipments" to Buyer's customers unless Seller, in its sole discretion, deems it necessary. Unless the parties agree otherwise in writing, Buyer must take all goods ordered within six (6) months of the order date. If all shipments have not been completed within that time, Buyer will pay a cancellation charge as set by Seller. Seller may agree to hold goods for a longer time, with Buyer paying all storage/holding fees.

The ship date(s) designated by Seller represent a reasonable estimate of the time required to manufacture the goods from the date the order is accepted by Seller. All delivery dates are approximate and such dates do not represent Seller's promise to ship or deliver goods on such dates unless otherwise expressly agreed in writing. Goods may be tendered in partial shipments at Seller's discretion. If Seller determines it is necessary to modify the design or specifications for the goods, the shipping date shall be extended by the period of time required to achieve the agreed-upon modifications to the design, specifications, or terms of sale. The performance date(s) designated by Seller for services represent a reasonable estimate of the time required to begin and complete the services. Some services are contingent on appropriate environmental conditions. Delays in services caused by inappropriate environmental or site conditions, including weather, shall not be a breach of the Terms.

- 5. Inspection:** Buyer has the right to inspect goods or services upon receipt and run adequate tests to determine whether the goods shipped conform to the warranties. Buyer shall compensate Seller at the contract price for all goods used in testing and Buyer bears all expenses incurred in any inspection or testing, whether or not the goods conform. Failure to inspect the goods or services or failure to notify Seller in writing that such are nonconforming within ten (10) days of the receipt by Buyer shall constitute a waiver of Buyer's rights of inspection and rejection for nonconformity and shall be an irrevocable acceptance of goods by Buyer.
- 6. Insurance:** The parties shall obtain and maintain insurance coverage with limits sufficient to cover the liabilities outlined in these Terms. Seller or Buyer will provide a basic certificate of insurance evidencing coverage on the other party's request. In no event will Buyer be an additional insured on Seller's policies, nor will Seller waive its subrogation rights.
- 7. Warranty:** Except as otherwise stated in Seller's published, product-specific warranty or product disclaimer, Seller warrants to Buyer, for a period of one year from the date of shipment from Seller's plant, that all goods manufactured by Seller and/or sold under these Terms shall be free from defects in materials and manufacture. Buyer is solely responsible for determining if goods fit Buyer's particular purpose and are suitable for Buyer's process and application. Seller's statements, engineering and technical information, and recommendations are provided for the Buyer's convenience and the accuracy or completeness thereof is not warranted. If, after Seller receives written notice, within the warranty period, that any goods allegedly do not meet Seller's warranty, and Seller, in its sole discretion, determines that such claim is valid, Seller's sole obligation and Buyer's exclusive remedy for breach of the foregoing warranty or any Seller published warranty, will be, at Seller's option, either: (i) repair or replacement of such goods or (ii) credit or refund to Buyer for the purchase price from Seller. In the case of repair or replacement, Seller will be responsible for the cost of shipping the parts but not for labor to remove, repair, replace or reinstall the allegedly defective goods. Refurbished goods may be used to repair or replace the goods and the warranty on such repaired or replaced goods shall be the balance of the warranty remaining on the goods which were repaired or replaced. Any repair or rework made by anyone other than Seller is not permitted without prior written authorization by Seller, and voids the warranty set forth herein. Seller warrants to Buyer that it will perform services in accordance with the Sales Documents using personnel of required skill, experience and qualifications and in a professional and workmanlike manner in accordance with generally recognized industry standards for similar services. With respect to any services subject to a claim under the warranty set forth above, Seller shall, in its sole discretion, (i) repair or re-perform the applicable services or (ii) credit or refund the price of such services at the pro rata contract rate and such shall be Seller's

sole obligation and the exclusive remedy for breach of the foregoing warranty on services. Products manufactured by a third-party ("Third-Party Product") may constitute, contain, be contained in, incorporated into, attached to or packaged together with, the goods. Buyer agrees that: (a) Third-Party Products are excluded from Seller's warranty in this Section 7 and carry only the warranty extended by the original manufacturer, and (b) Seller's liability in all cases is limited to goods of Seller's design and manufacture only. EXCEPT FOR SELLER'S WARRANTY OF TITLE TO THE GOODS, SELLER EXPRESSLY DISCLAIMS AND EXCLUDES ALL OTHER WARRANTIES WHATSOEVER, WHETHER, EXPRESSED OR IMPLIED, ORAL, STATUTORY, OR OTHERWISE, INCLUDING BUT NOT LIMITED TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY AND ANY WARRANTIES ARISING FROM TECHNICAL ADVICE OR RECOMMENDATIONS, COURSE OF DEALING OR OF PERFORMANCE, CUSTOM OR USAGE OF TRADE. Seller's obligations do not cover normal wear and tear or deterioration, defects in or damage to any goods resulting from improper installation, accident or any utilization, maintenance, repair or modification of the goods, or any use that is inconsistent with Seller's instructions as to the storage, installation, commissioning or use of the goods or the designed capabilities of the goods or that, in its sole judgment, the performance or reliability thereof is adversely affected thereby, or which is subjected to abuse, mishandling, misuse or neglect or any damage caused by connections, interfacing or use in unforeseen or unintended environments or any other cause not the sole fault of Seller, and shall be at Buyer's expense. Seller's warranty is contingent upon the accuracy of all information provided by Buyer. Any changes to or inaccuracies in any information or data provided by Buyer voids this warranty. Seller does not warrant that the operation of the goods will be uninterrupted or error-free, that the functions of the goods will meet Buyer's or its customer's requirements unless specifically agreed to, or that the goods will operate in combination with other products selected by Buyer or Buyer's customer for its use.

8. **Waiver of Subrogation:** Buyer agrees to waive all rights of subrogation that would otherwise be available to its insurers, regardless of the theory of recovery, relating in any way to the design, testing, manufacture, sale, warnings, use, maintenance, or installation of any goods, any components, or any related services.
9. **Nuclear Application Exclusion:** GOODS AND SERVICES SOLD HEREUNDER ARE NOT INTENDED FOR USE IN ANY NUCLEAR OR NUCLEAR-RELATED APPLICATIONS. Buyer: (i) accepts goods and services in accordance with the restriction set forth in this Section, (ii) agrees to communicate such restriction in writing to any and all subsequent purchasers or users and (iii) agrees to defend, indemnify and hold harmless Seller from any and all claims, losses, liabilities, suits, judgments and damages, including incidental and consequential damages, arising from use of goods and services in any nuclear or nuclear-related applications, whether the cause of action be based in tort, contract or otherwise, including allegations that the Seller's liability is based on negligence or strict liability.
10. **Buyer's Processes, Materials, and Systems:** Buyer is purchasing filtration products only. Buyer has not purchased, and is not relying on Seller to provide, services, including services related to engineering, system design, process safety, environmental health and safety, or code and standard compliance. Seller disclaims all liability related to gratuitous information, assistance or advice provided by but not required of Seller under the Agreement. The parties agree that Buyer shall be solely responsible for all hazards associated with its processes, products, and ingredients, regardless of whether the hazards relate to fire, explosion, material handling, exposure to harmful dusts, fumes, or other contaminants, or any other hazard that poses a risk to person or property. As the process/system owner, Buyer is responsible for compliance with all applicable laws, standards, and regulations, and for mitigating all hazards safely. Buyer shall insure at all times that emissions from its processes and equipment are safe and within acceptable and permitted limits and that its operation of Seller's products is safe. The parties agree that Seller shall not be liable or responsible for exposure to pollutants, dusts, emissions, or fumes from Buyer's process or Seller's equipment. Buyer agrees that it is purchasing a component product that will be utilized within a system that Seller did not design, approve, install, operate, or maintain. Seller is a component product supplier only. If Buyer's employees, contractors, or representatives, or any third-party, claims harm as a result of exposure to emissions, dust, fumes, or pollutants from Buyer's processes, materials, ingredients, or systems, Buyer agrees to fully indemnify and defend Seller pursuant to these terms and conditions of sale.
11. **Government Sales:** Seller objects to the application of any United States Federal Acquisition Regulation ("FAR") or Defense Federal Acquisition Regulation ("DFAR") provision or clause to these Terms and any order, and Buyer acknowledges that any such FAR or DFAR provisions contained in any order or other document(s) furnished by Buyer shall be of no force or effect unless otherwise agreed in writing by an officer of Seller.

- 12. Credit and Payment:** Credit accounts will be opened only with Buyers approved by Donaldson's Credit Department. All sales made on credit are due and payable 30 days following the invoice date unless a different period is stated on the invoice. All amounts not paid when due shall bear interest at eight percent (8%) per annum, or the highest rate allowed by law, whichever is lower, until paid. Seller reserves the right at any time, to alter or suspend credit, or to change the credit terms provided herein, when in its sole opinion the financial condition of Buyer so warrants. Seller may at any time, with or without notice to Buyer, and at its option, suspend work and shipment under this contract if, in Seller's sole opinion, the financial condition of Buyer so warrants. In such cases, in addition to any other remedies herein or provided by law, Seller may require cash payment or satisfactory security from Buyer before credit is restored or Seller continues performance. If Buyer fails to make payment or fails to furnish security satisfactory to Seller, then Seller has the right to enforce payment of the full contract price of the work completed and in process. If Buyer fails to make payment when due, Buyer shall immediately pay to Seller the entire unpaid amounts for any and all shipments made to Buyer regardless of the terms of the shipments and whether said shipments are made pursuant to these Terms or any other contract of sale between Seller and Buyer, and Seller may withhold all subsequent shipments until Buyer settles its full account. Seller's acceptance of less than full payment is not a waiver of any of its rights.
- 13. Minimum Order:** Minimum order quantities are noted on the applicable quotation.
- 14. Prices & Quotations:** Orders for goods will be invoiced at prices in effect at the time of Seller's acceptance of the order, unless otherwise specified in Seller's written quotation to Buyer. Prices do not include transportation or related costs. These Terms allocate the product risks between the parties, which are reflected in the prices for the goods. Quotations are valid for 30 days, unless otherwise specified, and represent no obligation until the order, issued by Buyer in response to the quote, is acknowledged and accepted by Seller. The prices and Seller's performance under an order are subject to resource availability and costs within Seller's control at the time of manufacture of the goods.
- 15. Specialized Packaging/Equipment:** Buyer will pay or reimburse Seller for the cost of specialized packaging beyond Seller's standard packaging including packing for export and charges assessed for the use of specialized equipment (lift gates, soft-tops, etc.) to ship goods.
- 16. Catalog Weights & Dimensions:** Catalog weights and dimensions are estimates, but are not guaranteed.
- 17. Cancellation, Suspension & Rescission:** No accepted order shall be modified or cancelled by Buyer except upon Seller's written agreement, in which case, it shall be subject solely to these Terms, whether or not stated in the change-order. Cancellation of orders for standard goods is subject to cancellation charges. Buyer will reimburse Seller for all costs and expenses including commitments and internal expenses incurred by Seller in the event of order cancellation for modified or customized goods, or for standard goods in greater than customary quantities. Costs of cancellation may represent 100% of the value of the order which is canceled depending upon the level of customization and the status of work-in-process. If Buyer fails to fulfil its obligations, is declared bankrupt, is subject to a suspension of payments process, requests a moratorium, proceeds with a liquidation of its business, its assets are attached in whole or in part, or any similar procedures or actions, Seller has the right to suspend any order, cancel or rescind any order, in whole or in part, without prior notice, by written declaration, at its option and without prejudice to any rights to compensation for costs, damages and interest.
- 18. Returned Goods:** When expressly authorized by Seller in writing, unused, non-defective goods in saleable condition may be returned to Seller, at Buyer's expense, and subject to a handling and restocking charge and additional conditions which may be obtained by contacting Seller. Seller will not accept return of any goods without authorization or goods that have been used, modified or altered in any way.
- 19. Repairs, Alterations & Modifications:** If Seller is requested to repair goods not covered by its warranty, such repairs shall be made at the expense of the person requesting such repair. Any alterations or modifications to the goods made by anyone other than Seller are not permitted without specific prior written authorization by Seller and will void the warranty.
- 20. Limitation on Liability:** SELLER SHALL NOT BE LIABLE, AND IT HEREBY DISCLAIMS ALL LIABILITY, FOR ANY LOSS OF PROFITS, CONSEQUENTIAL, CONTINGENT, INDIRECT, SPECIAL, LIQUIDATED, PUNITIVE OR INCIDENTAL DAMAGES WHATSOEVER, INCLUDING, BUT NOT LIMITED TO, LOSS OF USE, BUSINESS OR REVENUE, EVEN IF IT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES AND REGARDLESS OF THE

LEGAL THEORY ASSERTED, INCLUDING WARRANTY, CONTRACT, NEGLIGENCE OR STRICT LIABILITY. SELLER'S LIABILITY TO BUYER FOR DIRECT DAMAGES AND/OR ITS CUSTOMER(S) WILL IN NO EVENT EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS MANUFACTURED OR SERVICES PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. NO PENALTY CLAUSE APPEARING IN ANY DOCUMENT WILL BE EFFECTIVE AGAINST SELLER UNLESS IT HAS BEEN EXPRESSLY ACCEPTED IN WRITING BY AN OFFICER OF SELLER. The limitation of liability set forth above shall not apply to (i) liability resulting from Seller's gross negligence or willful misconduct and (ii) death or bodily injury resulting directly from Seller's acts or omissions.

- 21. Trademarks:** Buyer agrees that any trademark, trade name and logo of Seller ("Seller Marks") and their associated goodwill are Seller's exclusive property. By selling to Buyer, Seller does not grant to Buyer any right to use Seller Marks, unless expressly permitted in writing by Seller. Buyer will not advertise, promote, market, or package any goods in a manner likely to dilute, disparage, or cause confusion with respect to any Seller Mark. Buyer will not use Seller's name in Buyer's promotional or advertising literature, or assert affiliation with Seller or any Seller affiliate, unless expressly agreed in writing by Seller in advance of each instance. Buyer will not, at any time, contest the validity of any Seller Mark, claim any rights in any Seller Mark or do anything which, in Seller's opinion, might disparage, confuse or lessen the significance of any Seller Mark.
- 22. Buyer Indemnity:** Buyer, at its sole expense, will indemnify, defend, and hold Seller and its affiliates, successors, assigns, officers, directors, employees and agents harmless from and against any claim, demand, proceeding, or action for damages, liability, loss, cost, or expense, including amounts paid in settlement and attorneys' fees and court costs, arising out of, in connection with or based upon, use of the goods, incorporation of the goods into Buyer's goods, or resale of goods, the warranties and/or remedies offered by Buyer that are different than those contained in Seller's warranty regarding the goods
- 23. Taxes & Other Charges:** Prices for the goods do not include any taxes, including sales, use, excise, VAT taxes, or any duty, custom, inspection or testing fee, or any other tax, fee or charge of any nature imposed by any governmental authority ("Tax") on or measured by any transaction between Seller and Buyer. The amount of any present, retroactive, or future Tax, except taxes on or measured by Seller's net income, shall be added to the prices, and Buyer will pay such Tax, unless Buyer provides Seller tax exemption certificates acceptable to the taxing authorities.
- 24. Export Control:** Buyer acknowledges that the goods and the purchase of goods may be subject to various customs, import and export control laws and regulations of the United States and potentially other countries. Buyer represents and warrants that it will not export or re-export the goods or technical data related thereto except in conformity with all applicable laws and regulations including those of the country of export and those of the country of origin of the goods.
- 25. Errors:** All of Seller's clerical errors are subject to correction.
- 26. Specification, Engineering & Design Changes & Special Tests:** Seller may, in its sole discretion and without incurring any liability to Buyer: (a) alter the specifications for or make any design or engineering change to any goods; (b) discontinue the manufacture or sale of any goods; (c) discontinue the development of any new goods, whether or not such goods have been publicly announced; or (d) commence the manufacture and sale of new goods having features which make any goods wholly or partially obsolete. Seller shall be permitted to discontinue the manufacture and/or sale of any goods, including replacement parts without recourse from Buyer. Notwithstanding the above, Seller will fill accepted orders from Buyer for any such altered or discontinued goods to the extent it has such product. Buyer may request Seller to change the specifications for any goods. If Seller accepts such a request, the parties will negotiate any resulting change in price for the goods and Buyer will pay Seller for any raw materials, work in process, and/or finished goods that become obsolete. Any such change will affect only those orders issued after the effective date of such change. Unless otherwise agreed in writing by Seller, all special tests and inspections of the goods required by Buyer shall be performed at Buyer's expense at Seller's facilities.
- 27. Confidential information:** All non-public, confidential or proprietary information of Seller, including but not limited to, specifications, samples, designs, plans, drawings, documents, data, business operations, customer lists, pricing, discounts or rebates, disclosed by Seller to Buyer, whether disclosed orally or disclosed or accessed in written, electronic or other form, and whether or not marked, designated or otherwise identified as "confidential" is confidential, solely for the use of this order and may not be disclosed or copied unless authorized in writing by an authorized representative of Seller. Upon Seller's

request, Buyer shall promptly return all documents and other materials received from Seller. Seller shall be entitled to seek injunctive relief for any violation of this Section. This Section does not apply to information that is: (a) in the public domain; (b) known to Buyer before disclosure; or (c) rightfully obtained by Buyer on a non-confidential basis from a third-party. Any drawings, models, specifications or samples submitted by Seller shall remain Seller's sole property and Buyer shall treat them as Seller's confidential information unless an authorized representative of Seller has indicated otherwise in a signed writing. No use or disclosure of such items, or any design or production techniques revealed thereby, shall be made without Seller's prior written consent. Unless the parties agree otherwise in writing, Seller, its designated affiliate or licensor, if any, owns all right, title and interest in and to all intellectual property rights and all other information, technical or otherwise, related to the goods or services and all modifications thereto sold or licensed under these Terms, which were conceived, developed, made or supplied, whether in whole or in part, by Seller even if Buyer reimburses Seller for any costs related thereto. Buyer will not, at any time contribute to, do or cause to be done any act or thing in any way impairing or intending to impair any such right, title and interest described herein.

- 28. Security Interest:** As security for the payment and performance of Buyer under these Terms, Seller may request Buyer to grant an irrevocable standby letter of credit or Buyer grants Seller a security interest in all goods purchased under these Terms, and in the proceeds thereof, including all insurance proceeds, until Seller is paid in full for goods. Buyer hereby authorizes Seller to sign and file financing statements and other instruments required to protect and perfect such security interest as described herein.
- 29. Notices:** All notices to Seller, to be effective against Seller, must be in writing and sent by certified mail, with return receipt requested or by a nationally recognized overnight delivery service to Seller's headquarters. The effective date of such a notice is the date of receipt. Seller may designate in writing other individuals to receive notice and may change its notice address.
- 30. Assignment:** Buyer will not assign, transfer or delegate any order accepted by Seller or any of its rights, duties, obligations, or related interests without Seller's prior written approval. Seller may, as local law allows, terminate or cancel, without penalty, any order accepted by Seller on: (i) the sale of all or substantially all of Buyer's stock, (ii) the sale or transfer of the entire business or substantially all the assets of Buyer, or (iii) any significant change in the management or control of Buyer. Any assignment, transfer, or delegation of orders or any interest therein, without Seller's prior written consent, is voidable and cause for termination or cancellation of such orders. Nothing in these Terms will be construed to grant any person or entity, not a party to any order accepted by Seller, any rights or powers whatsoever. No person or entity will be a third-party beneficiary of any order accepted by Seller.
- 31. No Waiver:** Any failure or delay by either party in exercising any right or remedy in any instance will not prohibit the party from exercising it later or from exercising any other right or remedy.
- 32. Severability:** If a court or tribunal of competent jurisdiction holds any provision of these Terms to be invalid, illegal, or unenforceable, the provision will be deemed severable and the invalidity, illegality, or unenforceability will not affect any other provision of these Terms which must be enforced in accordance with the intent of these Terms.
- 33. Force Majeure:** Seller shall not be liable to Buyer, nor be deemed to have defaulted or breached these Terms or any order, for any failure or delay in performance when and to the extent such failure or delay is caused by or results from acts or circumstances beyond the control of Seller including, without limitation, acts of God, flood, fire, earthquake, explosion, governmental actions, war, invasion or hostilities, terrorist threats or acts, riot, or other civil unrest, national emergency, revolution, insurrection, epidemic, lockouts, strikes or other labor disputes, restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate or suitable materials, materials or communication breakdown or power outage. Seller may, in its sole discretion, allocate its inventory of goods among itself, its customers, other channels of distribution and Buyer. If a force majeure event prevents or delays, for a period exceeding 6 months, Seller's performance under an accepted order, either party may terminate, without penalty, the accepted orders affected by such event, by giving written notice thereof to the other party.
- 34. Independent Contractors:** The parties agree that the relationship created by these Terms is that of independent contractors.

- 35. Compliance with Laws:** Buyer will comply with all applicable laws and regulations now or hereafter in effect, including but not limited to the anti-corruption laws. In the event Buyer acts as Seller's agent, distributor or reseller, Buyer certifies that neither it, nor anyone acting on its behalf is an official, agent, or employee of any government or governmental agency or political party or a candidate for any political office on the date of any order Buyer places. Buyer shall promptly notify Seller of any event that may result in a failure to comply with this Section 35. Buyer shall not, directly or indirectly, in the name of, on behalf of, or for the benefit of Seller pay, promise to pay, or authorize the payment of any money, or offer, give, promise to give or authorize the giving of anything of value to, any official, agent or employee of any government, governmental agency or government-owned or controlled enterprise, or to any political party or candidate. Buyer shall require each of its directors, officers, employees, and agents to comply with the provisions of this Section 35. Any breach of the provisions of this Section shall entitle Seller to terminate immediately, without notice and without liability to Buyer.
- 36. Equipment:** All tools, equipment, dies, and gauges ("Equipment") developed for the production of goods shown on the order, are the property of Seller and title shall remain with Seller. Such Equipment, even if paid for in whole or in part by the Buyer, shall not convey to the Buyer and/ or others any right, title, or interest in or to Equipment, unless through prior written agreement by Seller.
- 37. Survival:** Provisions of these Terms which by their nature should apply beyond their terms will remain in force after any termination or expiration of any orders placed pursuant to these Terms including, but not limited to, the following numbered provisions: 3, 7-11, 20-22, 27, 28, 29-31, 32, 35-38.
- 38. Warranty Statement:** Buyer acknowledges receipt and acceptance of the applicable product-specific warranty statement.
- 39. Remote Monitoring:** Seller may install remote data monitoring devices on or as part of the goods, and/or use the good's existing remote data monitoring devices for certain connected goods. Seller and its authorized third-party contractors may at any time (but shall not be obligated to) monitor, access, view, and/or use the data for the purposes of monitoring the location of the connected goods, helping determine the condition and status of the connected goods, helping schedule service, and/or potentially increasing overall customer service. Seller will use commercially reasonable efforts to prevent unauthorized disclosure of the data. At any time, Seller reserves the right to terminate, suspend, and/or modify the remote monitoring in whole or in part. Any remote monitoring services are provided "AS IS" and "AS AVAILABLE", with no warranty of any kind. Seller hereby expressly disclaims all warranties regarding the reliability, accuracy, functionality, completeness, up-time, security, timeliness, and/or performance including but not limited with respect to any remote monitoring and/or or any related software, hardware, technology, data, transmission, network, and application.

# Equipment Warranty

Donaldson Hy-Pro manufactured equipment is warranted to be free from defective materials and workmanship for a period of one year from the date of shipment when used within the normal working parameters for which the equipment was designed. Donaldson Hy-Pro assumes no responsibility for unauthorized installation of any added components, removal or repair of originally installed components, or alterations or rewiring of originally supplied equipment. Any such changes without written instructions or prior approval from Donaldson Hy-Pro will void all warranties.

If any Donaldson Hy-Pro supplied equipment does not perform as warranted, it will be repaired or replaced at Donaldson Hy-Pro's discretion. If deemed defective due to improper use, installation, start-up, or maintenance, Donaldson Hy-Pro reserves the right to charge the Purchaser with the full costs associated with warranty replacement. Donaldson Hy-Pro will ship warranty replacements via standard ground service. If other modes are required, the customer may be liable for costs incurred. It is the customer's responsibility to properly ship, freight prepaid, all item(s) to be returned to Donaldson Hy-Pro. Shipping insurance is recommended. This warranty does not apply to parts, which through normal use require replacement during the warranty period.

Donaldson Hy-Pro's liability under this warranty shall be limited to repair or replacement. Reasonable labor costs for warranty repairs may be reimbursed with the prior approval from Donaldson Hy-Pro. In no event, however, will Donaldson Hy-Pro be liable for any consequential damages to other equipment. This warranty shall not apply to any assembly or component part of the equipment which has been furnished by the Purchaser.

Except for the express warranty set forth above, Donaldson Hy-Pro hereby disclaims all warranties, expressed or implied, to Purchaser, including but not limited to, warranty of fitness for a particular purpose and warranty of merchantability. Donaldson Hy-Pro shall not be liable for any incidental or consequential damages which might arise out of the use of this property.

# Equipment Warranty Rates & Times

Warranty labor will be calculated according to the following schedule. Warranty repairs must be pre-approved by Donaldson Hy-Pro to be eligible for reimbursement. For all other repairs, contact Donaldson Hy-Pro.

## Warranty Rates

Labor - \$100/hr

Travel - \$75/hr

## V1 Vac-U-Dry Vacuum Dehydrators

V1 Vac-U-Dry Vacuum Dehydrators

Flow switch - 0.5hr

Oil pump swap - 1.0hr

Oil pump motor swap - 0.5hr

Vacuum pump swap - 1.0hr

Heater element - 1.0hr

ICV solenoid - 0.5hr

Condenser Motor - 1.0hr

D.P Gauge swap - 0.5hr

Vacuum gauge - 0.5hr

Pressure gauge - 0.5hr

LOGO/PLC swap - 1.5hr

Other control panel components - 1.0hr

## V3-V60 Vac-U-Dry Vacuum Dehydrators

Flow switch - 1.0hr

Oil pump swap - 1.5hr

Oil pump motor - 1.0hr

Vacuum Pump swap - 2hr

Vacuum Pump Motor swap - 1hr

Heater element - 1.5hr

ICV Solenoid - 1.0hr

Condenser/motor - 1.0hr

D.P Gauge swap - 0.5hr

Pressure gauge - 0.5hr

Flow meter - 0.5hr

LOGO/PLC swap - 1.5hr

Vacuum gauge - 0.5hr

Other Control Panel Components - 1.0hr

Moisture sensor swap - 0.5hr

Foam sensor swap - 0.5hr

Condensate Solenoid valve - 0.5hr

Condensate drain switch - 0.5hr

Therma couple swap - 1hr

Condensate tank seal - 0.5hr

Vacuum chamber seal - 0.5hr

Solid State Relay - 0.5hr

# Equipment Warranty Rates & Times

## **COT - Turbine Oil Coalesce Skid**

Flow switch - 1.0hr  
Oil pump swap - 2.0hr  
Oil pump motor - 1.0hr  
Therma couple swap - 1hr  
Heater element - 1.5hr  
ICV Solenoid - 1.0hr  
Water Drain solenoid - 1.0hr  
Pressure gauge - 0.5hr  
D.P Gauge swap - 0.5hr  
Flow meter - 1.0hr  
LOGO/PLC swap -1.5hr  
Solid State Relay - 0.5hr  
Water totalizing meter - 0.5hr  
Other Control panel components - 1.0hr

## **COD - Diesel Fuel Conditioning Skid**

Flow switch - 1.0hr  
Oil pump swap - 2.0hr  
Oil pump motor - 1.5hr  
D.P Gauge swap - 0.5hr  
ICV Solenoid - 1.0hr  
Water Drain solenoid - 1.0hr  
Pressure gauge - 0.5hr  
Flow meter - 1.0hr  
LOGO/PLC swap - 1.5hr  
Water totalizing meter - 0.5hr  
Other Control panel components - 1.0hr

## **HS - Heater Skid**

Flow switch - 1.0hr  
Oil pump swap - 2.0hr  
Oil pump motor - 1.5hr  
Therma couple swap - 1hr  
Heater element - 1.5hr  
ICV Solenoid - 1.0hr  
Pressure gauge - 0.5hr  
Flow meter - 1.0hr  
LOGO/PLC swap - 1.0hr  
Solid State Relay - 0.5hr  
D.P Gauge swap - 0.5hr  
Other Control panel components - 1.0hr

# Merchandise Return & Warranty Authorization Policy

Any merchandise returned to the factory for credit or warranty replacement must be accompanied by a completed Return Goods Authorization (RGA) form. To obtain a RGA number and form you must contact Customer Service at 317.849.3535. All shipments must be sent to the factory freight prepaid, unless otherwise approved. Shipping insurance is recommended. Returns must be sent to the correct factory location, Customer Service will confirm the return location.

**Donaldson Hy-Pro  
6810 Layton Road  
Anderson, IN 46011**

In the case of multiple item returns, all items must be tagged with possible causes of failure (if applicable). Please mark the outside of each shipping carton with the RGA number.

## Return Disposition: Elements and Equipment

1. Upon request, an authorized RGA number and form will be issued to the customer.
2. Any items returned must be in unused condition, unless otherwise authorized.
3. If items are returned for a customer related error a restocking fee up to 20% will be applied.
4. If items are returned for a Donaldson Hy-Pro related error a full credit will be issued.
5. Credit will not be issued on items which are no longer in specification with current design, were manufactured more than 12 months prior to the return date, or were damaged in return shipping. Donaldson Hy-Pro will determine if the items are suitable for return.
6. If the return material is not received within 45 days from the date of issue, Donaldson Hy-Pro will cancel the RGA and reserves the right to not accept the return, unless otherwise authorized.
7. Items returned shall be shipped to the factory freight prepaid. Shipping insurance is recommended.

## Equipment Warranty Claims: Defective Component Return

1. Contact the factory for equipment help and troubleshooting.
2. If required, a warranty RGA number and form will be issued to the customer with pre-approved labor hours and rates for the repair.
3. The customer must return the defective item(s) to the appropriate plant indicated on the RGA to receive credit for parts and/or labor.
4. The customer must issue a PO for the replacement part to be sent in advance of the plant approving the warranty claim.
5. Donaldson Hy-Pro reserves the right to refuse warranty coverage if:
  - The item(s) are deemed defective as a result of inappropriate use, installation, start-up, improper maintenance or during return shipping.
  - The warranty claim is not received by Donaldson Hy-Pro within 45 days of the date of issue, unless otherwise authorized.
6. Items returned shall be shipped to the factory freight prepaid. Shipping insurance is recommended.
7. Upon warranty approval, Donaldson Hy-Pro will credit the customer for the advanced replacement part or provide a suitable replacement part if not yet purchased by the customer.
8. If the item has been determined not to have a manufacturing defect and is not suitable for repair, the customer will be sent a disposition report.

**Note: All correspondence must reference the RGA# to ensure proper tracking return or claim.**

# ATEX Recommendation for the use of fluid filter and maintenance indicators in hazardous zones according to Directive 2014/34/EU

## Fluid Filters

Filters (hydraulic-, lubrication-oil-, air breather-) in fluid systems are not subjective to this directive. Fluid filters do not require a CE- marking.

For fluid filters to be used in hazardous zones, the ignition sources have to be analyzed by the operator, considering the complete installation.

During filtration of fluid and gases, electrostatic charge may occur on the filter element, the filter housing and the fluid – especially when glass fiber filter elements are used.

For use in hazardous zones, Donaldson Hy-Pro recommends to use only metal filter housings and to connect the housing electrically to ground.

These filters do not possess any external ignition source.

The earthing is realized by using the clamping bolts. The maximum content of magnesium is less than 7.5%.

The size of the largest projected non-conducting areas are smaller than 100 sqcm (400 sqcm if a conducting framing is provided).

According to DIN EN 13463, the Donaldson Hy-Pro fluid filters are suitable for the use in appliance group II category 2 G/D up to 120 Deg C.

The function of the electrical maintenance indicator is described below.

## Maintenance Indicators

The electrical maintenance indicators provided with Donaldson Hy-Pro released products are simple electrical devices according to DIN EN 60079-11, without their own voltage supply.

The electrical components consist of reed-contacts, bimetal switches, plug connections and terminal clamps.

For equipment group II, category 2 G (zone 1) and category 2 D (zone 21), these simple electrical components can be used acc. EN 60079-14 and EN241-11 in intrinsically safe circuits [EEX ib] without making and certification.

The EN 60079-12 (gas) and EN 61241-14 (dust) installation regulations have to be observed as well as the national security terms and accident prevention regulations.

The electrical utilities are attributed to category ib and temperature class T5.

If the electrical upper part is used, conventional (intrinsically safe circuit), it will not present itself as a heat source.

Usage in EX-zones is possible when the indicators are connected intrinsically safe (EX-i).

For that purpose, a switch amplifier with an intrinsically safe input is required. The switch amplifier must be installed outside the EX-zone, leaving only the intrinsically safe wires in contact with the hazardous zone.

# FLA Estimated Amp Draw

## FSLD

Flow Rate	HP (kW)	Power Option									
		12	X12	22	X22	23	X23	46	X46	57	X57
<b>0.5-2</b>	0.5 (0.37)	7.4	6.6	3.6	3.1	1.9	1.6	0.95	0.8	0.69	1.1
<b>5</b>	1 (0.75)	12.8	13	6.4	6.2	3.7	3.2	1.7	1.6	1.3	1.1
<b>10</b>	2 (1.5)	17.6	23.2	10	11.5	8.8	11.3	3	2.9	2.3	2.2
<b>22-32</b>	5 (3.7)	NA	NA	22	23.5	23	8.4	6.5	4.2	5.2	5.2

## CFU, FCLCOD, FCLCOT, FSLCOD

Flow Rate	HP (kW)	Power Option															
		11	X11	12	X12	21	X21	23	X23	40	X40	46	X46	52	X52	57	X57
<b>0.5-5</b>	0.5 (0.37)	7.2	6.4	7.4	6.6	3.6	3.1	1.9	1.6	0.86	0.8	0.95	0.8	0.89	1.3	0.69	1.1
<b>10</b>	1 (0.75)	12.4	12.4	12.8	13	6.4	6.2	3.7	3.2	1.85	1.9	1.7	1.6	1.5	1.3	1.3	1.1
<b>20</b>	1.5 (1.1)	16	17	15	16	8	9	5	4.4	2.3	2.8	2.3	2.2			1.8	2.2

## FC, FCL, FPL, FSL, FSW, FSTO, FSA, FSJL


Flow Rate	HP (kW)	Power Option															
		11	X11	12	X12	21	X21	23	X23	40	X40	46	X46	52	X52	57	X57
<b>0.5-4</b>	0.5 (0.37)	7.2	6.4	7.4	6.6	3.6	3.1	1.9	1.6	0.86	0.8	0.95	0.8	0.89	1.3	0.69	1.1
<b>5-10</b>	1 (0.75)	12.4	12.4	12.8	13	6.4	6.2	3.7	3.2	1.85	1.9	1.7	1.6	1.5	1.3	1.3	1.1
<b>22-32</b>	3 (2.2)	NA	NA	NA	NA	13.2	14	8	8.4	4.4	5.2	3.8	4.2	3.2	3.5	3.1	3.3

\*Equipment with on board PM-1 (O Option) may have higher power motors and higher amp draw. Contact factory.

# Indicator Wiring Diagrams

## PFH 131, 152, 419, 840 "DX" INDICATORS

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP




SPDT SWITCH  
1 = COMMON  
2 = NC  
3 = NO

SWITCHING VOLTAGE: MAX. 120 V AC / 175V DC  
SWITCHING CURRENT: MAX. 0.17A AC / 0.25A DC  
SWITCHING POWER: MAX. 3.5 VA AC / 5W DC

## PF2

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP




SPDT SWITCH  
1 - COMMON  
2 - NC  
3 - NO

ALTERNATING CURRENT: 250 V AC 5 AMPS

DIRECT CURRENT  
RESISTIVE VOLTAGE: 220  
INDUCTIVE LOAD AMPS: 0.25  
LOAD AMPS: 0.10

## PF2, PFH131, PFH152, PFH419, PFH840 "L" INDICATOR OPTION

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP




SPDT SWITCH  
C - 24 V DC Common (-)  
1 - 24 V DC (+)  
2 - NC  
3 - NO

24 V DC MAXIMUM VOLTAGE  
0.25 AMP MAX  
3 WATT MAX POWER

## LFIND-F,D,H

For FSL, FCL, FCLCOD, FSLCOD, FSTO, FSA, FSJL,  
LF, LFM, DLF, DLFM, FPL&FC "D3" OPTION




STANDARD PORT  
1 - COMMON  
2 - NC  
3 - NO

TYPE: SPDT  
OPTION: H  
POWER: 60W  
MAX. CURRENT: 1.0 AMPS  
MAX. VOLTAGE (VAC/VDC): 240  
SETTING (%F.S.): 25 TO 100

A PROTECTIVE CONDUCTOR  
TERMINAL IS PROVIDED ON  
THE DIN CONNECTOR

## F8, PF4

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP




SPDT SWITCH  
1 - COMMON  
2 - NO  
3 - NC

ELECTRICAL RATINGS  
4 AMPS, INDUCTIVE  
7 AMPS, RESISTIVE  
2 AMPS, LAMP LOADED @ 28 V DC, 115 V AC 60 HZ  
28 V DC

## MF3, S409

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP




SPDT SWITCH  
1 - COMMON  
2 - NO  
3 - NC

5A  
125/250 V AC  
24 V DC (RESISTIVE)  
AUTOMATIC RESETTING

## DFN/DFH


43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP



SPDT SWITCH  
1 - NO OR NC (REVERSIBLE)  
2 - NC OR NO (REVERSIBLE)  
3 & - NOT USED

1A  
250 V AC / 200 V DC  
70W  
AUTOMATIC RESETTING


## G25E / G45E

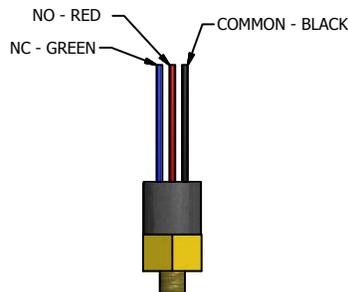

3A 125 V AC MAX  
3A 40 V DC MAX

## G25D / G45D

DIN 43650A PLUG & RECEPTACLE  
WITH CABLE CLAMP



SPDT SWITCH  
1 - COMMON  
2 - NC  
3 - NO

3A 125 V AC MAX  
3A 40 V DC MAX  
U.L. RECOGNIZED

# Mounting Specifications

Assembly	Connection Option	Mounting Thread Type	Connection Flange Thread
<b>PFH419</b>	C20	M12 x 1.75	1/2 – 13 UNC
<b>PFH840</b>	C32	1/2 – 13 UNC	3/4 - 10 UNC
<b>PFHB</b>	C20 C24	M14 x 2.0 M16 x 2.0	M12 x 1.75
<b>DFH19</b>	F16	M8 x 1.25	M8 x 1.25
<b>DFH39</b>	F24	M12 x 1.25	M12 x 1.25
<b>DFN19</b>	F16	M8 x 1.25	3/8 x 16 – UNC
<b>DFN39</b>	F24	M10 x 1.25	M12 x 1.5
<b>F8</b>	F32 F40	1/2 – 13 UNC	1/2 – 13 UNC
<b>TFR2</b>	F24	3/8 – 16 UNC	1/2 – 13 UNC
<b>TFR3</b>	F40	3/8 – 16 UNC	1/2 – 13 UNC

# Quality Statement & ISO Certification

## Our Mission

At Donaldson Hy-Pro, our mission is to make our customers as efficient as possible. From improving the reliability of hydraulic and lube oil assets through our filter elements and filtration equipment to stopping equipment failures and downtime to reducing the environmental impact from the use and disposal of industrial fluids, it is our goal to eliminate industrial fluid contamination and all difficulties related to it.

Donaldson Hy-Pro strives to provide the highest quality filtration products and solutions, with a strong commitment to customer service, competitive pricing, and customer product support. The company continuously develops product and process improvements along with the introduction of new products.

## Quality Policy

Our policy is to provide the highest quality filtration products and service to both internal and external customers.

Our commitment is to continually improve products and processes, increase the capabilities of all employees and enhance the relationships with suppliers and customers.

## ISO Certification



**American Systems Registrar, LLC**, a provider of third-party system registration and accredited by the ANSI National Accreditation Board attests that:

**AMERICAN SYSTEMS REGISTRAR**  
5281 Clyde Park Ave. SW, Suite 1  
Wyoming, MI 49509 USA  
www.asrworldwide.com  
616-942-6273



**DONALDSON COMPANY, INC. – HY-PRO**  
6810 LAYTON ROAD  
ANDERSON, IN 46011


with a scope of:

**DESIGN AND MANUFACTURE OF FLUID FILTRATION COMPONENTS AND SYSTEMS**

has established a quality management system that is in conformance with the International Quality System Standard

**ISO 9001:2015**

ASR Certificate Number:	1459
Date of Certification:	July 16, 2024
Date of Certification Expiration:	July 15, 2027
Revision:	
Re-Issue Date:	

  
President

**CERTIFICATE OF REGISTRATION**



# Donaldson Hy-Pro Interchange

The world's largest selection of critical filter elements.

With over 500,000 filter element cross references, Donaldson Hy-Pro's Interchange offers an extensive and comprehensive selection of critical hydraulic and lube oil filter elements. Discover all Donaldson Hy-Pro cross references via our app, Donaldson Hy-Pro Solutions and our distributor website.

## **Lower ISO Codes: Lower Total Cost of Ownership**

Donaldson Hy-Pro filter elements deliver lower operating ISO Codes so you know your fluids are always clean, meaning lower total cost of ownership and reducing element consumption, downtime, repairs, and efficiency losses.

**DFE Rated Filter Elements** DFE is Donaldson Hy-Pro's proprietary testing process which extends ISO 16889 Multi Pass testing to include real world, dynamic conditions ensures that our filter elements excel in your most demanding hydraulic and lube applications.

**Upgrade Your Filtration** Keeping fluids clean results in big reliability gains and upgrading to Donaldson Hy-Pro filter elements is the first step to clean oil and improved efficiency.

**Advanced Media Options** DFE glass media maintaining efficiency to  $\beta_{3(c)} > 4000$ , Dualglass + water removal media to remove free and emulsified water, stainless wire mesh for coarse filtration applications, and Dynafuzz stainless fiber media for EHC and aerospace applications.

**Delivery in days, not weeks** From a massive inventory of ready-to-ship filter elements to flexible manufacturing processes, Donaldson Hy-Pro is equipped for incredibly fast response time to ensure you get your filter elements and protect your uptime.

**More than just filtration** Purchasing Donaldson Hy-Pro filter elements means you not only get the best filters, you also get the unrivaled support, training, knowledge and expertise of the Donaldson Hy-Pro team working shoulder-to-shoulder with you to eliminate fluid contamination.

**Want to find out more? Get in touch.**

hyprofiltration.com  
info@hyprofiltration.com  
+1 317 849 3535

**Donaldson Confidential. Do Not Distribute.**

**CUT DIRT,  
CUT COSTS**

**Donaldson.**  
**HY-PRO™**

F119913-020626-EM

© 2026 Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.